

Erosion and Sediment Control Guide for Land Disturbing Activities in the Auckland Region

June 2016

Guideline Document 2016/005



Auckland Council
Te Kaunihera o Tāmaki Makaurau



Erosion and Sediment Control Guide for Land Disturbing Activities in the Auckland Region

June 2016

Auckland Council

Guideline Document 2016/005

ISSN 2230-4541 (Print)

ISSN 2230-455X (Online)

ISBN 978-0-9941350-4-9 (Print)

ISBN 978-0-9941350-5-6 (PDF)

Reviewed for Auckland Council by

Name: Branko Veljanovski

Position: Engineering Design Services Manager

Approved for Auckland Council publication by

Name: Sarah Sinclair

Position: Chief Engineer

Recommended citation:

Leersnyder, H., Bunting, K., Parsonson, M., and Stewart, C. (2016). *Erosion and sediment control guide for land disturbing activities in the Auckland region*. Auckland Council Guideline Document GD2016/005. Prepared by Beca Ltd and SouthernSkies Environmental for Auckland Council.

© 2016 Auckland Council

This publication is provided strictly subject to Auckland Council's copyright and other intellectual property rights (if any) in the publication. Users of the publication may only access, reproduce and use the publication, in a secure digital medium or hard copy, for responsible genuine non-commercial purposes relating to personal, public service or educational purposes, provided that the publication is only ever accurately reproduced and proper attribution of its source, publication date and authorship is attached to any use or reproduction. This publication must not be used in any way for any commercial purpose without the prior written consent of Auckland Council. Auckland Council does not give any warranty whatsoever, including without limitation, as to the availability, accuracy, completeness, currency or reliability of the information or data (including third party data) made available via the publication and expressly disclaim (to the maximum extent permitted in law) all liability for any damage or loss resulting from your use of, or reliance on the publication or the information and data provided via the publication. The publication, information, and data contained within it are provided on an "as is" basis.

Acknowledgements

This document was prepared with technical input from industry experts, including, but not limited to, the following individuals:

Authors

- Hugh Leersnyder - Beca
- Kathleen Bunting - Beca
- Michael Parsonson - SouthernSkies Environmental
- Campbell Stewart - SouthernSkies Environmental

Contributors

- Project management: Kate Dawkins - GHD
- Additional authors: Gregor McLean - SouthernSkies Environmental
Hannah Giess - Beca, Ross Winter - Beca
- Graphic Design: Neelam Singh - Beca

Peer reviewer

- Mike McConnell - McConnell Consultancy

Auckland Council editorial panel

- Sarah Sinclair - Chief Engineer, Engineering and Technical Services
- Branko Veljanovski - Engineering Design Services Manager, Engineering and Technical Services
- Bridget Wild - Senior Earthworks/Streamworks Specialist, Compliance
- Alex Colibaba - Senior Stormwater Specialist, Infrastructure and Environmental Services
- Nick Vigar - Principal - Green Infrastructure and Planning, Infrastructure and Environmental Services
- Simon Aiken - Senior Stormwater Specialist, Infrastructure and Environmental Services
- Gretel Silyn Roberts - Principal - Technical Guidance, Infrastructure and Environmental Service
- Janet MacKinnon - Technical Capability Coordinator, Infrastructure and Environmental Service

We gratefully acknowledge the technical input provided by industry experts, including, but not limited to the following individuals: Carol Bannock (NZ Transport Agency), Tony Cain (GHD), Ed Clayton (Clayton Fordham), Aidan Cooper (Chester Consultants), Kylie Eltham (Fletcher Constriction), Jason Hambrook (HEB), Brian Handyside (Erosion Management), Andy Irwin (AT), Peter Mitchell (Auckland Motorway Alliance/Opus), Ban Najim Aldin (WSL), Richard Regan (CKL), Graeme Ridley (Ridley Dunphy), Wayne Viall (Fulton Hogan), Matthew Wallace (International Erosion Control Association), Brent Warby (Dempsey Wood Civil Ltd.), Lachlan Ward (Babington & Assoc. Ltd.). Thanks are also extended to Auckland Council staff, both past and present, who contributed to the development of the guideline.

Photos were contributed by SouthernSkies, Erosion Control Ltd, Contractor's-Services LLC, Maccaferri NZ Ltd, Fletcher Construction, HEB Contractors, Hawkesbury-Nepean Catchment Management Trust, and Fulton Hogan

This guideline has drawn on Auckland Council's guideline 'TP90 - *Erosion and sediment control guidelines for land disturbing activities*' and the NZ Transport Agency's '*Erosion and sediment control standard for state highway infrastructure*'. The project team acknowledges in particular the NZ Transport Agency's permission to use technical information from the guideline. Other agencies and councils are acknowledged for the use of their material throughout the guideline.



Preface

What is the purpose and scope of this guideline?

This document, *Erosion and Sediment Control Guide for Land Disturbing Activities* in the Auckland Region, known as GD05, provides technical guidance for the selection, design and use of erosion and sediment control (ESC) practices and measures for land disturbing activities in an Auckland context.

As is explained in section A1.2, this guideline focuses on 'earthworks', where earthworks comprise:

- Disturbance of soil/ground for activities such as residential, commercial or infrastructure developments, roads and utilities, and
- Earthworks associated with quarrying (such as overburden disposal), and ancillary farming earthworks (excluding cultivation).

The primary intended audience for the guideline are designers and contractors/implementers, who construct, operate and maintain ESC measures as part of earthworks and other land disturbing activities at multiple scales. However, it also includes useful guidance for council consent processors and compliance officers, as well as developers and householders involved in earthworks activities.

GD05 is an update of TP90 – *Erosion and Sediment Control Guidelines for Land Disturbing Activities in the Auckland Region* (1999, and 2007 update), and supersedes that guideline. The scope or objective of this guideline update was to provide a user-friendly document that provides practical ESC methodologies and technologies that reflect the evolution of industry best practice and technological innovation.

What new inclusions and approaches are in this guideline?

The key new inclusions and approaches in this guideline (relative to TP90) are:

- A more web-friendly structure that can be viewed online and downloaded for printing
- Clear flow charts to demonstrate the steps in selecting and using the best practice option (refer Section C)
- A greater focus on practical and clear guidance for contractors and implementers of ESCs, including new photos and diagrams, installation checklists and ESC site plan/drawing examples (refer Part 2 and appendices)



- Recent ESC technologies and practices that are now considered best practice, including T-bar decants for decanting earth bunds and flocculants for sediment control; as well as clarity on the potential use of new emerging practices/innovations
- Greater emphasis on non-structural approaches to erosion control such as timing and staging of earthworks
- Guidance on ESC for activity-specific land disturbing activities such as dewatering, small sites, roads and utilities, works in the coastal marine area, and farm tracking
- Additional guidance on other considerations such as sustainability, safety in design and cost benefits of ESC.

Who was consulted in the preparation of this guideline?

Extensive consultation was undertaken in the development of this guideline, including:

- Workshops with and input from industry through a focus group of recognised ESC practitioners, contractors, and council/government staff that regularly use the previous TP90 or other ESC guidelines
- Workshops and other consultation with Auckland Council's internal stakeholders such as its Resource Consents and Building Controls Teams
- A workshop with Mana Whenua.

How can I provide feedback on the guideline?

For your comments and suggestions, please fill in a feedback form downloadable from aucklanddesignmanual.co.nz and send to esc@aucklandcouncil.govt.nz.

How will I be advised of updates to the guideline?

This guideline is a living document and updates will be made, as required, to the web version available on Auckland Council's website at aucklanddesignmanual.co.nz. Hard copies will not be sold or officially issued. It is the responsibility of the user of this guideline to ensure they download the most up-to-date version of GD05.

Contents

PART 1: PRINCIPLES

SECTION A: INTRODUCTION TO THE GUIDELINE

A1.0 Introduction	1
A1.1 Aims of the guideline.....	1
A1.2 Scope and application of the guideline.....	2
A1.3 How to use this guideline.....	3
A1.4 Need for the guideline	6
A1.5 How this guideline was developed.....	7
A1.6 Current regulatory framework for land disturbing activities	8
A1.7 Mana whenua values	9
A2.0 Fundamental principles of erosion and sediment control	12

SECTION B: EROSION AND SEDIMENTATION IN THE AUCKLAND REGION

B1.0 Erosion and sedimentation in the Auckland region	16
B1.1 The erosion and sedimentation process.....	16
B1.2 Types of erosion	17
B1.3 Factors influencing erosion.....	19
B1.3.1 Weather	19
B1.3.2 Topography.....	20
B1.3.3 Soil characteristics.....	20
B1.3.4 Ground cover.....	21
B1.3.5 Duration of soil exposure	21
B1.4 Calculating sediment yield	22
B1.4.1 Potential calculation tools.....	22

SECTION C: SELECTING AND USING THE EROSION AND SEDIMENT CONTROL PRACTICES

C1.0 Selecting and using the ESC practices	23
C1.1 The ESC development process.....	23
C1.2 The treatment train approach	23
C1.3 Selecting the best management practice(s)	23
C1.3.1 Step 1: Site assessment	24
C1.3.2 Step 2: Consider the construction methodology (for the overall development)	25
C1.3.3 Step 3: Choose the ESCs	25
C1.4 Design of controls (preparing an ESC Plan)	27
C1.5 Construction and operation of controls	28
C1.5.1 Step 1: Define the work area in which earthworks are to occur	28
C1.5.2 Step 2: Implement perimeter erosion controls	28
C1.5.3 Step 3: Implement primary sediment retention controls	28
C1.5.4 Step 4: Protect topsoil and manage stockpiles.....	28
C1.5.5 Step 5: Progressively deploy internal ESCs.....	28
C1.5.6 Step 6: Progressively stabilise the site as works progress.....	29
C1.5.7 Step 7: Set up and follow a management and monitoring system.....	29
C1.6 Decommissioning of controls	29
C1.7 Compliance.....	29

C1.8 Other considerations	30
C1.8.1 Sustainability	30
C1.8.2 Safety	31
C1.8.3 Cost benefits of ESC	32
C1.8.4 Ancillary construction effects	33

PART 2: PRACTICES

SECTION D: OVERVIEW OF ESC PRACTICES

D1.0 Overview of ESC Practices	34
D1.1 Scope of Part 2	34
D1.2 Current best practice methods and measures	35
D1.3 New emerging practices/innovations	36

SECTION E: EROSION CONTROL PRACTICES

E1.0 Non-structural approaches.....	38
E1.1 Minimise disturbance	38
E1.2 Stage construction	38
E1.3 Protect slopes.....	39
E1.4 Protect watercourses.....	39
E1.5 Stabilise exposed areas rapidly	39
E1.6 Consider the timing of earthworks	40
E2.0 Water management controls – for concentrated water flows	41
E2.1 'Clean water' diversion channels and bunds	41
E2.1.1 Design	41
E2.1.2 Construction, operation and maintenance	45
E2.1.3 Decommissioning.....	46
E2.2 'Dirty water' diversion channels and bunds	47
E2.2.1 Design.....	47
E2.2.2 Construction, operation and maintenance	49
E2.2.3 Decommissioning.....	49
E2.3 Contour drains (cut-offs)	50
E2.3.1 Design.....	50
E2.3.2 Construction, operation and maintenance	53
E2.3.3 Decommissioning.....	53
E2.4 Check dams	54
E2.4.1 Design.....	54
E2.4.2 Construction, operation and maintenance	57
E2.4.3 Decommissioning	57
E2.5 Pipe drop structures and flumes.....	58
E2.5.1 Design.....	58
E2.5.2 Construction, operation and maintenance	63
E2.5.3 Decommissioning.....	64
E2.6 Stabilised entranceways.....	65
E2.6.1 Design.....	65
E2.6.2 Construction, operation and maintenance	69
E2.6.3 Decommissioning.....	69
E2.7 Surface roughening.....	70
E2.7.1 Design	70
E2.7.2 Construction, operation and maintenance.....	72
E2.7.3 Decommissioning.....	72

E3.0 Soil and surface stabilisation practices	73
E3.1 Topsoiling and grass seeding.....	74
E3.1.1 Design.....	74
E3.1.2 Construction, operation and maintenance.....	78
E3.2 Hydroseeding.....	79
E3.2.1 Design.....	79
E3.2.2 Construction, operation and maintenance.....	81
E3.3 Turfing	82
E3.3.1 Design.....	82
E3.3.2 Construction, operation and maintenance.....	84
E3.4 Mulching.....	85
E3.4.1 Design.....	85
E3.4.2 Construction, operation and maintenance.....	88
E3.5 Geotextiles and erosion control blankets	89
E3.5.1 Design.....	89
E3.5.2 Construction, operation and maintenance.....	97

SECTION F: SEDIMENT CONTROL PRACTICES

F1.0 Structural approaches	100
F1.1 Sediment retention ponds.....	100
F1.1.1 Design.....	100
F1.1.2 Construction, operation and maintenance	112
F1.2 Decanting earth bunds	116
F1.2.1 Design	116
F1.2.2 Construction, operation and maintenance	121
F1.2.3 Decommissioning	122
F1.3 Silt fences	123
F1.3.1 Design	123
F1.3.2 Construction, operation and maintenance	128
F1.3.3 Decommissioning	130
F1.4 Super silt fences	131
F1.4.1 Design.....	131
F1.4.2 Construction, operation and maintenance.....	134
F1.4.3 Decommissioning	136
F1.5 Silt socks	137
F1.5.1 Design.....	137
F1.5.2 Construction, operation and maintenance.....	140
F1.5.3 Decommissioning	141
F1.6 Stormwater inlet protection.....	142
F1.6.1 Design.....	142
F1.6.2 Construction, operation and maintenance requirements.....	144
F2.0 Coagulant and flocculant treatment.....	145
F2.1 General	145
F2.1.1 Definition.....	145
F2.1.2 Purpose.....	145
F2.1.3 Coagulation	145
F2.1.4 Flocculation	145
F2.1.5 Conditions where practice applies.....	146
F2.1.6 Limitations	146
F2.1.7 Treatment options.....	146
F2.2 Rainfall activated treatment.....	148
F2.2.1 Design.....	150
F2.2.2 Construction, operation and maintenance	152
F2.3 Floc sock treatment.....	155
F2.3.1 Design.....	155
F2.3.2 Construction operation and maintenance.....	156

F2.4 Batch dosing treatment.....	157
F2.4.1 Design.....	157
F2.4.2 Construction, operation and maintenance	158
F2.5 Decommissioning	159
SECTION G: SPECIFIC ACTIVITIES	
G1.0 Dewatering.....	161
G1.1 Unique nature of this activity.....	161
G1.1.1 Conditions where practice applies	161
G1.1.2 Limitations.....	161
G1.2 Best practice ESC for this activity	161
G1.2.1 Key design criteria.....	161
G1.2.2 Construction and operation	162
G2.0 Small sites	164
G3.0 Roads and utilities.....	165
G3.1 Roads	165
G3.1.1 Unique nature of roading works	165
G3.1.2 Best practice ESC for roading works.....	165
G3.2 Utilities.....	168
G3.2.1 Unique nature of utility works.....	168
G3.2.2 Best practice ESC for utility works	168
G4.0 Works within a watercourse.....	171
G4.1 Unique nature of this activity	171
G4.2 Best practice ESC for this activity.....	171
G4.2.1 Temporary watercourse crossings.....	172
G4.2.2 Dam and pump or dam and divert devices.....	174
G4.2.3 Temporary watercourse diversions.....	175
G5.0 Works within the coastal marine area (CMA)	178
G5.1 Unique nature of this activity.....	178
G6.0 Quarrying	179
G6.1 Unique nature of this activity	179
G6.2 Best practice ESC for this activity.....	179
G6.2.1 Quarry access.....	179
G6.2.2 Managing clean and dirty water.....	180
G6.2.3 Overburden removal and disposal.....	180
G6.2.4 Quarry product handling and stockpiling	180
G7.0 Agriculture (farm tracking).....	181
G8.0 Soil binders	182
G8.1 Unique nature of this activity	182
G8.2 Best practice ESC for this activity.....	183
G8.2.1 Design	183
G8.2.2 Construction, operation and maintenance.....	183
G9.0 Dust control	184
G9.1 Unique nature of this activity.....	184
G9.2 Best practice ESC for this activity.....	185
G9.2.1 Design.....	185
G9.2.2 Construction, operation and maintenance.....	187
References.....	190
Glossary and abbreviations.....	192

LIST OF FIGURES

Figure 1a: Guideline structure and content – Part 1	4
Figure 1b: Guideline structure and content – Part 2	5
Figure 2: Examples of erosion (left hand photo) and sediment discharge (right hand photo).....	6
Figure 3: The basic erosion process.....	16
Figure 4: Types of erosion.....	17
Figure 5: Auckland mean monthly rainfall (mm) 1981-2010	20
Figure 6: The ESC development process	23
Figure 7: Steps in selecting the best practice option	24
Figure 8: Process to select the best practice option(s) and develop an ESC Plan for development/construction.....	26
Figure 9: Good example of staged construction and progressive stabilisation	37
Figure 10: Northern Motorway construction site - minimising disturbance	38
Figure 11: Flume installed to protect steep slope.....	38
Figure 12: Sediment discharge as a result of not protecting the watercourse	39
Figure 13: Rapid stabilisation	39
Figure 14: Clean water diversion used to isolate upper clean water flows from the works area	41
Figure 15: Turfing scraped from within the site to stabilise the perimeter bund.....	42
Figure 16: Cross-section of clean water diversion	44
Figure 17: Hotmix bund diverting the motorway runoff to the catchpit	44
Figure 18: Cross-section of a dirty water diversion.....	48
Figure 19: Dirty water diversion bund directing site water to a sediment retention pond.....	48
Figure 20: Drop out pit	48
Figure 21: Contour drain	50
Figure 22: Contour drain installed across access track	51
Figure 23: Contour drain cross-section.....	52
Figure 24: Check dam.....	54
Figure 25: Check dams installed in series to act as a permanent water velocity control measure	55
Figure 26: Check dams installed with a spillway to direct flows over the centre of the structure	56
Figure 27: Rock check dam.....	56
Figure 28: Silt socks can be used as a check structure on a low gradient channel.....	57
Figure 29: Flume conveying clean water over the works area	58
Figure 30: Geotextile lined flume	59
Figure 31: Wooden flume lined with impervious material.....	59
Figure 32: Pipe drop structure and Flumes.....	61
Figure 33: Pipe drop structures conveying upper water down an exposed slope	63
Figure 34: Stabilised entranceway	65
Figure 35: Stabilised entranceway	67
Figure 36: Example of truck wash and shaker ramp.....	68
Figure 37: Example of shaker ramp.....	68
Figure 38: Surface roughening with bulldozer	70
Figure 39: Surface roughening of a slope. Note the hollows acting as "micro" sediment traps	71
Figure 40: Surface roughening	72
Figure 41: Stabilisation via a combination of chip mulch, geotextile and aggregate	73
Figure 42: Grass stabilised earthworks site. Batter and building platforms	74
Figure 43: Initial grass strike - not stabilised.....	75
Figure 44: Approximately 40-60% grass strike - not stabilised.....	76
Figure 45: Approximately 90-100% grass strike - stabilised.....	76
Figure 46: Loss of topsoil and grass seed after heavy rain event. Will require stabilisation and reapplication.....	78
Figure 47: Specialist application of hydroseed.....	79
Figure 48: Sportsfield being hydroseeded. Sediment control remains installed until an 80% grass strike has established	80
Figure 49: Recently applied hydroseed on a stormwater wetland.....	81
Figure 50: Same wetland one week later, grass starting to take well.....	81

Figure 51: Turf being placed adjacent to a stabilised swale	82
Figure 52: Turf used to provide instant stabilisation of the swale allowing for the early commissioning of the device	83
Figure 53: Specialist application of hay mulch	85
Figure 54: Hydromulch application	86
Figure 55: Hydrohay as applied.....	86
Figure 56: Woodchip to stabilise the finished batter slope.....	87
Figure 57: Geotextile used to temporarily stabilise the batter face	89
Figure 58: Geotextile design - outfalls	92
Figure 59: Geotextile design – on slopes.....	92
Figure 60: Jute mesh.....	93
Figure 61: Straw blanket.....	93
Figure 62: Coconut fibre blanket used to stabilise batters while allowing grass to grow through	94
Figure 63: Bonded synthetic fibre mat used as erosion protection and medium for revegetation	96
Figure 64: Schematic of a sediment retention pond	101
Figure 65: SRP cross-section	102
Figure 66: Schematic of standard T-bar design.....	105
Figure 67: Example of baffles.....	106
Figure 68: Example of a level spreader	106
Figure 69: Level spreader.....	107
Figure 70: Example of an anti-seep collar	107
Figure 71: Sediment retention pond for <1.5 ha catchment	108
Figure 72: Sediment retention pond for 1.5 to 3 ha catchment	109
Figure 73: Sediment retention pond for 3 to 5 ha catchment	110
Figure 74: Example of baffles at dead water level.....	111
Figure 75: Installation of the outlet pipe and the anti-seep collars.....	112
Figure 76: Level spreader across the full width of the pond	113
Figure 77: Steel strapping used to attach decant system to horizontal pipework	113
Figure 78: Close up of decanting earth bund system	116
Figure 79: Decanting earth bund.....	117
Figure 80: Silt fence installed on edge of works	123
Figure 81: Silt fence joins. Left hand photo shows battens used to join the lengths. Right hand photo shows doubling over of fabric at end around the waratah	124
Figure 82: Schematic of a silt fence	126
Figure 83: Silt fence cross-section	127
Figure 84: Step-by-step installation of a silt fence.....	128
Figure 85: Contours create the same effect as returns in this case.....	129
Figure 86: Use of silt fence clips	129
Figure 87: Super silt fence	131
Figure 88: Schematic of a super silt fence	133
Figure 89: Step-by-step installation of a super silt fence	135
Figure 90: Silt sock used to provide control during final landscaping.....	137
Figure 91: Compost silt socks with returns installed	140
Figure 92: Silt sock with 1m overlapping joint.....	140
Figure 93: Silt sock joined using a sleeve and pegged and secured using bailing twine with 1 m overlapping joint	141
Figure 94: Straw sock secured in place using stakes and bale twine; note the stakes are placed every 600 mm	141
Figure 95: 'Turkeys nest'	141
Figure 96: Silt sock used to provide control during final landscaping works	141
Figure 97: Stormwater inlet protection silt fence within a construction yard (Note: Flooding not an issue in this case)	142
Figure 98: Silt fence installed to protect a new stormwater catchpit where impounded water will not create a flooding hazard	143
Figure 99: Installation of a silt sock to provide some protection to the catchpit	143
Figure 100: Rainfall activated flocculant treatment device.....	145
Figure 101: Rainfall activated treatment system.....	149
Figure 102: Rainfall catchment tray.....	150
Figure 103: Header tank	151
Figure 104: Flocculation shed.....	151

Figure 105: Floc sock installed in a half round boss pipe with a concrete wing wall to divert all dirty flows over the floc sock.....	155
Figure 106: Installation of floc socks.....	156
Figure 107: Dewatering skip bin.....	161
Figure 108: Dewatering bag and pipe sock	162
Figure 109: Example of a mobile 'turkeys nest' used for dewatering	162
Figure 110: Silt fence	164
Figure 111: Progressive stabilisation in limited space.....	166
Figure 112: Use of stabilisation products and progressive stabilisation.....	167
Figure 113: Typical trenching methodology	170
Figure 114: Temporary stream diversion to allow for the installation of a new culvert	171
Figure 115: Stabilised clean water diversion and temporary culvert to divert streamflows while a new culvert is being constructed.....	172
Figure 116: A temporary bridge in the process of being installed	172
Figure 117: In the process of constructing a temporary crossing	173
Figure 118: Water being diverted past a construction works area.....	174
Figure 119: Commencement of over pumping to allow for in-stream works.....	175
Figure 120: Temporary stream diversion installed to allow permanent culverts to be installed off line.....	175
Figure 121: Diversion channel prior to plug removal	176
Figure 122: Dewatering construction area into a sediment pond	176
Figure 123: Opening up bypass channel and closing off existing one	176
Figure 124: Re-establishment of flow in original channel.....	177
Figure 125: Sandbag coffer dam installed to complete stormwater outfall.....	177
Figure 126: Decanting earth bund and diversion bund installed during a farm track construction.....	181
Figure 127: Forward planning and management to minimise dust provide the best options for control.....	184
Figure 128: Dust suppression using a water cart.....	184
Figure 129: Snow blowing machine to provide dust control during a liming operation	185
Figure 130: Dust suppression using soil binders/polymers.....	185
Figure 131: Water truck dampening down the works area.....	187
Figure 132: Regular wetting of the haul road.....	187

LIST OF TABLES

Table 1: Types of erosion and their consequences.....	17
Table 2: Soil characteristics to consider.....	21
Table 3: Sustainability considerations for ESC	30
Table 4: Contour drain spacing	52
Table 5: Positioning of check dams	55
Table 6: Sizing criteria for pipe drop structures	60
Table 7: Sizing criteria for flumes.....	62
Table 8: Stabilised entranceway specifications.....	66
Table 9: Typical seed and fertiliser application rates	77
Table 10: Erosion control blankets/mats – design criteria.....	93
Table 11: Staple density	98
Table 12: Silt fence design criteria	125
Table 13: Super silt fence design criteria.....	132
Table 14: 300mm diameter silt sock	138
Table 15: 450mm diameter silt sock.....	139
Table 16: Specifications for compost	139

APPENDICES

Appendix A: References	A-1
Appendix B: Glossary and abbreviations	B-1
Appendix C: ESC construction quality checklists	C-1
Appendix D: Recommended line types & symbols.....	D-1
Appendix E: ESC site plan/drawing examples	E-1



An aerial photograph of a suburban neighborhood. On the left side, there is a large, irregularly shaped area of bare, brown earth, likely a construction site or a cleared lot. To the right of this area, the landscape transitions into a dense residential development with numerous houses, streets, and green spaces. A road or highway runs along the top edge of the image. The overall scene illustrates the interface between undeveloped land and established urban infrastructure.

Principles

SECTION A:
Introduction to the guideline

SECTION B:
Erosion and sedimentation
in the Auckland region

SECTION C:
Selecting and using the erosion
and sediment control practices



A

Introduction to the guideline



A1.0 Introduction

A1.1 Aims of the guideline

As part of Auckland's widely shared vision to be the world's most liveable city, the Auckland Plan (Auckland Council, 2012) identifies a need to reduce the overall yield of suspended sediment to priority marine environments.

This guideline, '*Erosion and Sediment Control Guide for Land Disturbing Activities in the Auckland Region*', known as GD05, supports this overall vision and target by providing technical guidance for the selection, design and use of erosion and sediment control (ESC) practices and measures for a range of land disturbing activities in an Auckland context.

The ultimate goal of this guideline is to minimise erosion, sediment discharge and sedimentation that occurs as a consequence of land disturbance in the Auckland region. In addition, the guideline seeks to facilitate land disturbance that complies with the *Resource Management Act 1991* (RMA) i.e. land disturbance that is necessary for:

"people and communities to provide for their social, economic, and cultural well-being and for their health and safety while –

- a) **sustaining the potential of natural and physical resources (excluding minerals) to meet the reasonably foreseeable needs of future generations; and**
- b) **safeguarding the life-supporting capacity of air, water, soil, and ecosystems; and**
- c) **avoiding, remedying, or mitigating any adverse effects of activities on the environment."**

(Section 5, RMA)

More specifically the guideline aims to:

- Provide an understanding of the fundamental principles of ESC
- Provide user-friendly technical advice on ESC methodologies/technologies that are current best practice, proven and practical
- Guide users on how to select and implement the ESC practices and procedures during the design, construction, operation, maintenance and decommissioning phases, within the Auckland context.

This guideline updates and replaces '*Auckland Regional Council Technical Publication Number 90 Erosion and Sediment Control Guidelines for Land Disturbing Activities in the Auckland Region*' (1999, and 2007 update), known as TP90.

The guideline is a living document that will be reviewed and revised as new research and technologies become available and legislation is reformed.

A1.2 Scope and application of the guideline

'Land disturbing activities' are defined in the Proposed Auckland Unitary Plan (PAUP, 2013) to include 'earthworks', 'ancillary farming earthworks' and 'ancillary forestry earthworks'.

This guideline primarily focuses on 'earthworks', which comprise the disturbance of soil, earth or substrate land surfaces for activities such as residential, commercial or infrastructure developments and maintenance, roads and utilities, ancillary farming earthworks, and earthworks associated with quarrying, such as overburden disposal. The guideline also addresses management of construction activities that result in the disturbance of sediment within the coastal marine area (CMA), excluding dredging.

Earthworks include activities such as:

- Blading
- Ripping
- Boring
- Moving
- Contouring
- Placing
- Cutting
- Removing
- Drilling
- Replacing
- Excavation
- Trenching
- Filling
- Thrusting.

While many of the measures covered in the guideline are relevant to cultivation and ancillary forestry activities, those activities are not specifically addressed. Other industry best-practice guidelines apply to those activities, as required throughout the PAUP.

For ease of use, the guideline does provide specific sections on:

- Roads and utilities
- Dewatering
- Works within a watercourse
- Small sites
- Farm tracking
- Overburden disposal associated with quarrying
- Works within the CMA.

For these specific land disturbing activities, Section F of the guideline provides specific guidance on which ESC controls are appropriate for these activities. In addition, direction is given on where other appropriate guidance can be found where applicable.

The guideline is applicable to all scales of development, from small sites (such as housing construction) to major developments, including permitted activities and those requiring resource consents (refer Section A1.6 for further discussion of the current regulatory framework).

The primary intended audience for the guideline are designers and contractors/implementers, who construct, operate and maintain ESC measures as part of earthworks and other land disturbing activities at multiple scales. However, it also includes useful guidance for council consent processors and compliance officers, as well as developers and householders involved in earthworks activities.

Figures 1a and 1b provide an overview of the structure and content of this guideline. This guideline is split into two main parts: 'Part 1 - Principles' and 'Part 2 - Practices'. The Principles Section outlines the fundamental principles that need to be considered when undertaking earthworks or other land disturbing activities. The Practices Section provides a set of controls to be used on site.

This document has been specifically prepared for use in the Auckland region. While many of the principles are common and can be used elsewhere, the technical specifications have been specifically developed for the geology, topography, receiving environments and context of Auckland. Auckland Council therefore disclaims any responsibility for use of GD05 outside of the Auckland region.

A1.3 How to use this guideline

How you should use this guideline will depend on your depth of existing knowledge of ESC principles and practices. If you are a less experienced ESC practitioner and/or have a limited knowledge of ESC principles and practices, you should follow all of the following steps:

1. **Scan the whole document** – to understand its aims, scope and general content and approach
2. **Understand the principles** – review Part 1 – Principles (Sections A to C) to gain an appreciation of the fundamental principles of ESC, erosion and sedimentation in the Auckland region, and the overall process for selecting and using ESC practices
3. **Review the range of options available** – review Part 2 – Practices (Sections D to G) to understand the range of ESC options available, and the benefits/applicability of each option
4. **Select the best practice option(s)** – follow the detailed steps in Section C to select the best practice option or options for your development i.e. develop an ESC Plan
5. **Implement the selected option(s) or ESC Plan** – follow the detailed steps in Section E or F to design, construct, operate, maintain and/or decommission your selected option/plan.

Note: Sites that require resource consent will require further approval prior to implementation of the works.

If you are an experienced ESC practitioner, and are familiar with this new guideline, you should focus on steps 3 to 5 above.

This guideline is a living document and updates will be made as required to the web version available on Auckland Council's website at aucklanddesignmanual.co.nz. Hard copies will not be sold or officially issued. It is the responsibility of the user of this guideline to ensure they download the most up-to-date version of GD05.

Part 1 – Principles

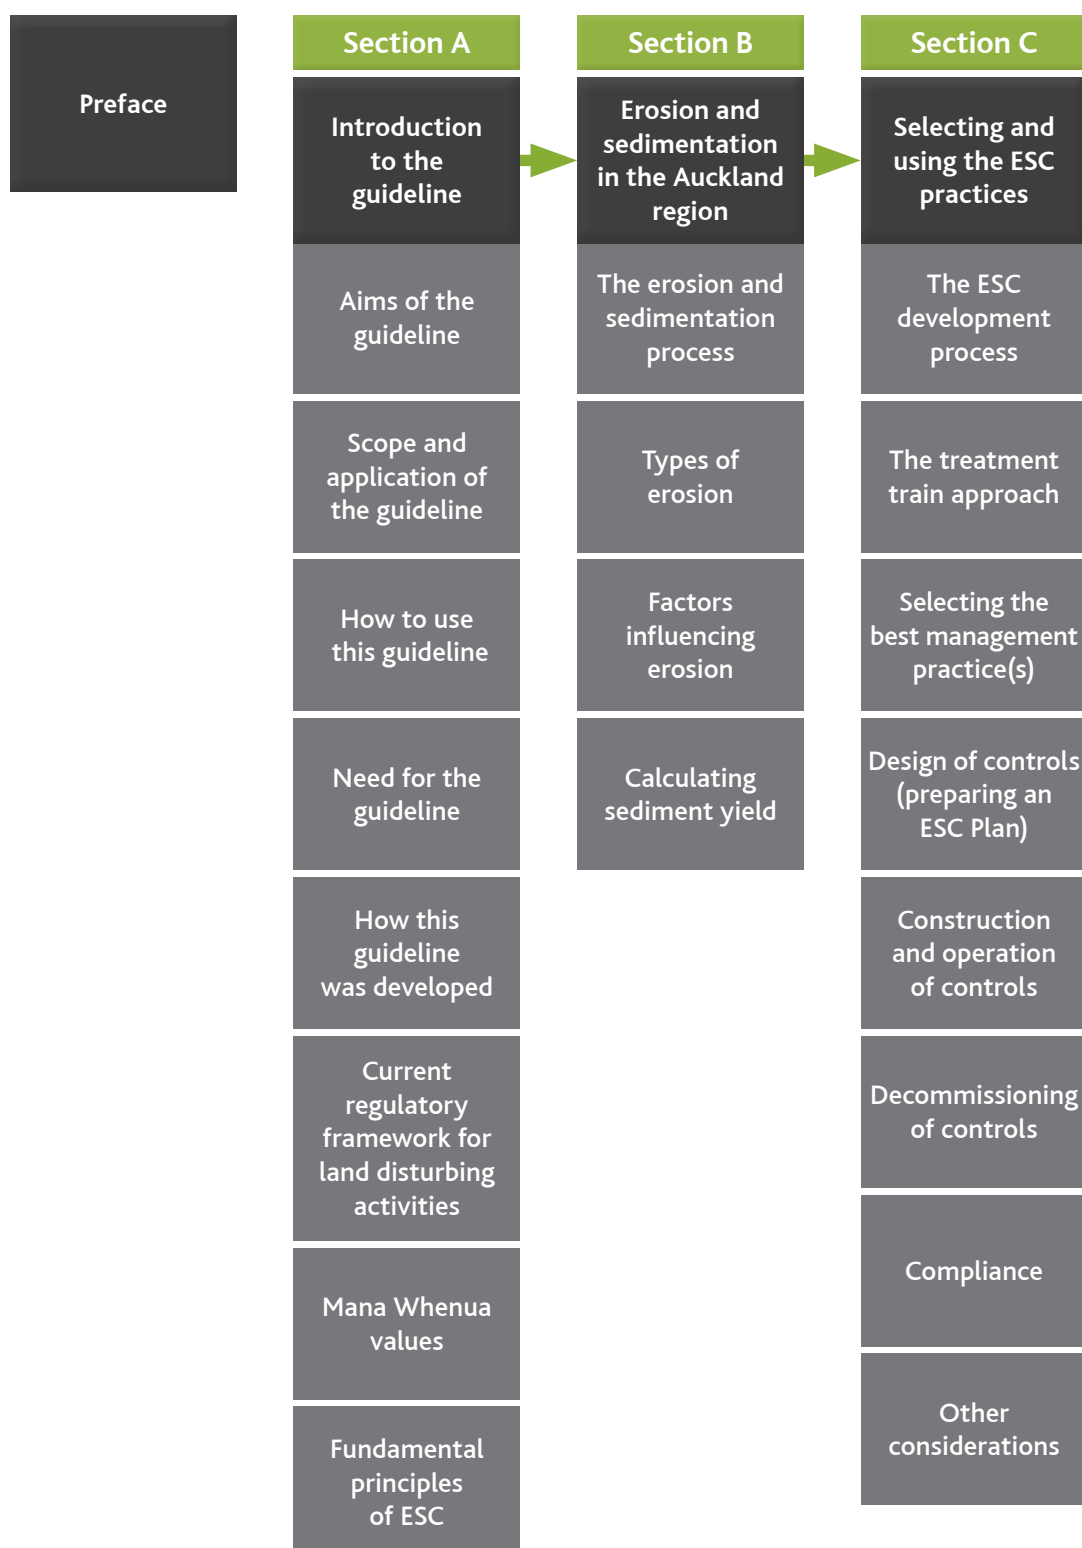


Figure 1a: Guideline structure and content – Part 1

Part 2 – Practices

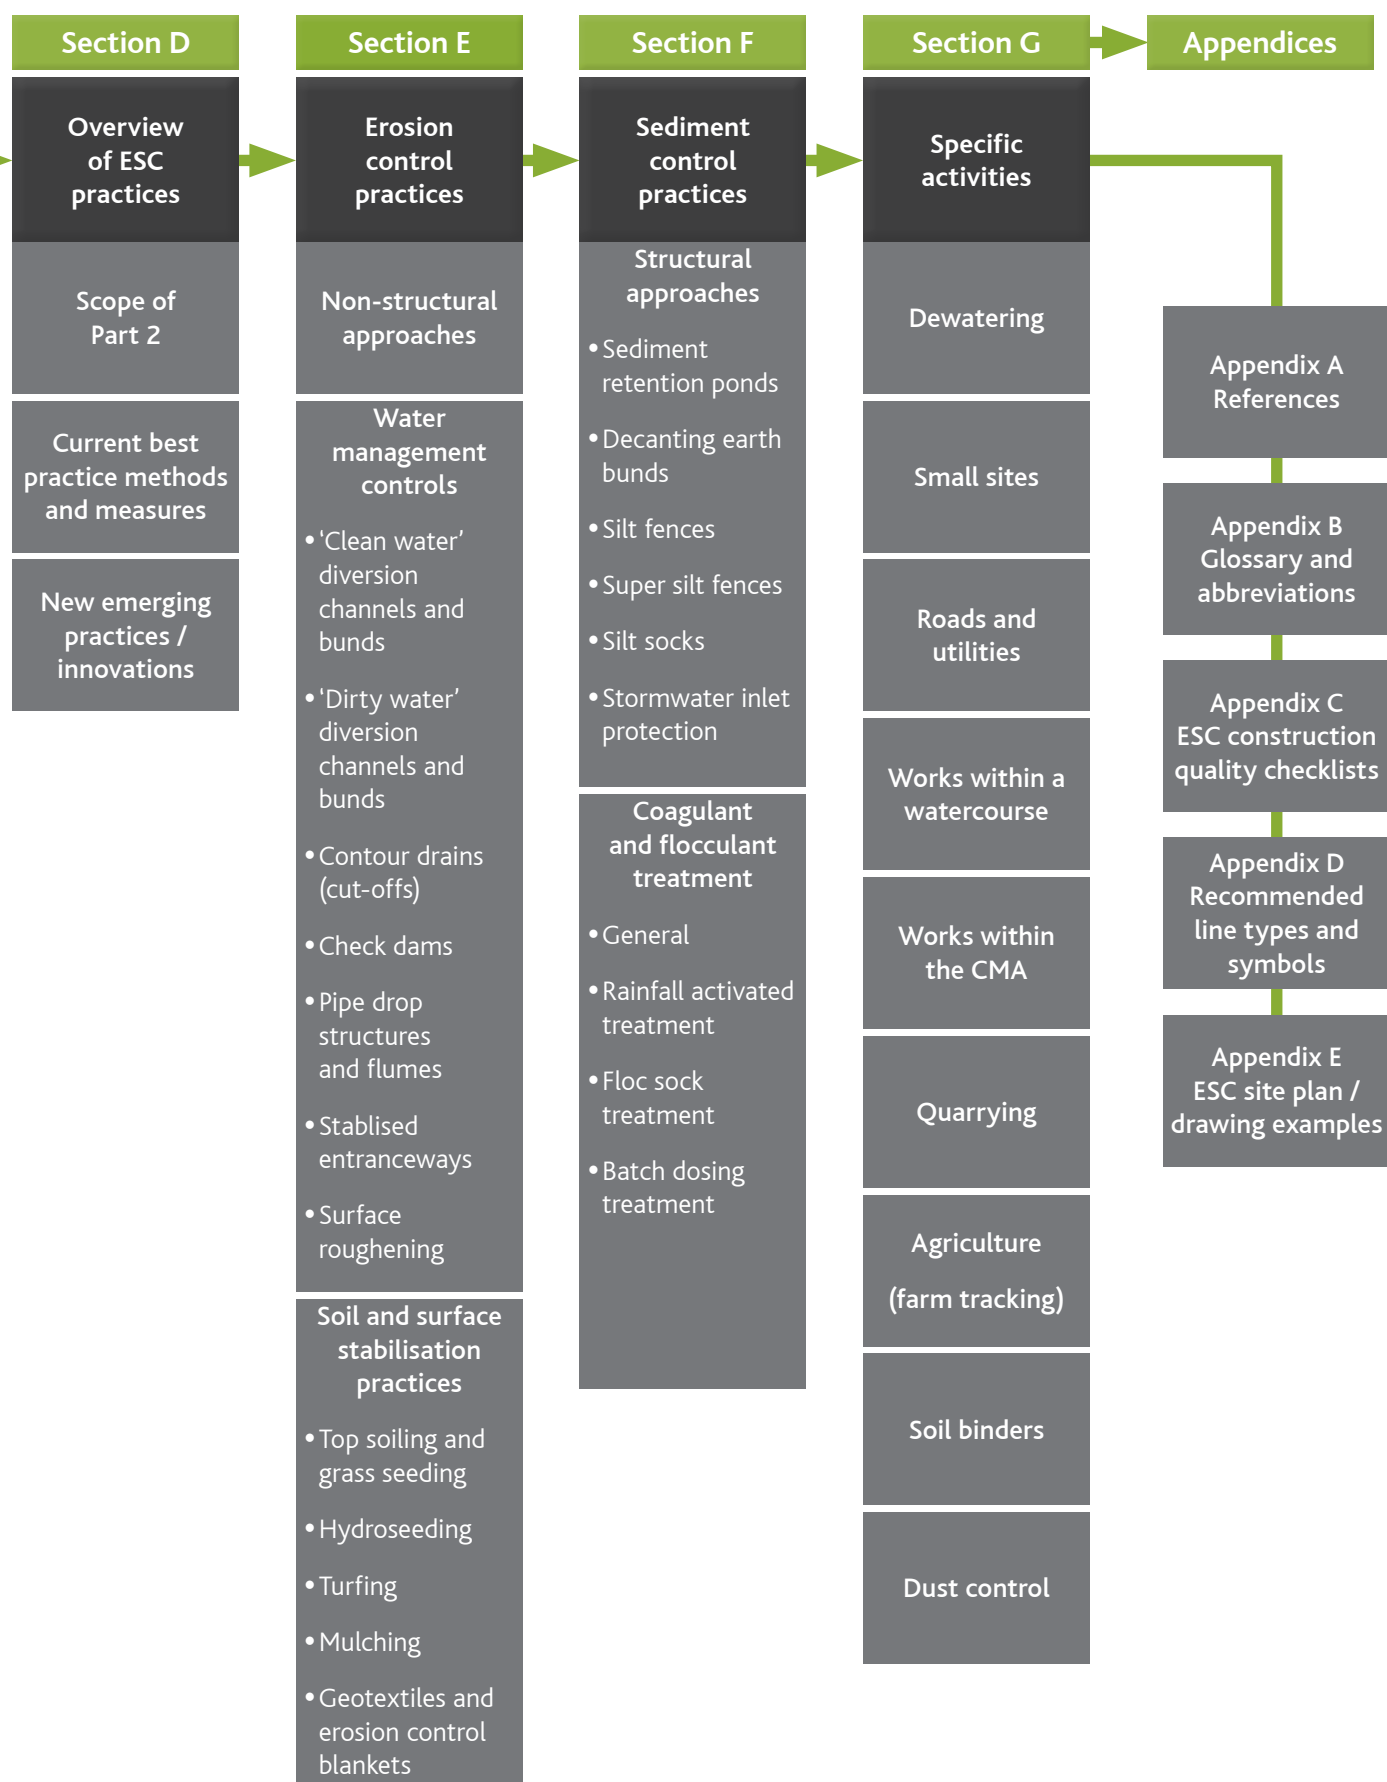


Figure 1b: Guideline structure and content – Part 2

A1.4 Need for the guideline

As Auckland continues to grow and develop, land continues to be stripped of vegetation and laid bare for the construction of subdivisions, roads, and other developments. Land disturbing activities that expose bare earth surfaces can significantly increase the potential for the generation and discharge of elevated levels of sediment and other contaminants, and consequently, have an adverse effect on the quality of water bodies and coastal waters (refer Figure 2).

The majority of Auckland's surface geology comprises fine clays. Clay particles are easily mobilised during rain events, and take much longer to settle out than coarser sand and silt material. Since clays are more difficult to retain within standard sediment control measures, erosion control plays a very significant role in effective management of land disturbance within the Auckland context.

The physical geography of the Auckland region is characterised by a network of relatively short, soft bottomed streams and rivers. The coast includes the sheltered, low-energy environments of the Waitemata, Manukau and Kaipara Harbours and the inner Hauraki Gulf. Their shallow estuarine embayments form depositional zones where the fine sediment eroded from the surrounding catchments settle. This makes the Auckland region particularly vulnerable to adverse impacts of erosion and sediment discharge.



Figure 2: Examples of erosion (left hand photo) and sediment discharge (right hand photo)

Where appropriate ESCs are not implemented, there is potential for a range of adverse effects on the social, natural environmental, cultural and economic wellbeing of the region, including:

- Ecological values associated with direct and indirect impacts on flora and fauna on land and in adjacent freshwater and marine waterbodies, for example:
 - Smothering
 - Deterioration of habitat from discharge of sediment and pollutants and sedimentation (e.g. stream blockage, reduced light levels, weed growth)
 - Abrasion and direct impact to fish, stream insects, shell fish and other bottom dwelling organism.
- Water quality for consumable water resources
- Aesthetic and recreational values of land and waterbodies

- Property and public utilities, for example:
 - Blocking of pipes/drains leading to indirect flooding issues
 - Build up of sediment in ports, marinas and navigable channels which require dredging
 - The consequential need for disposal of dredge material.
- Recreational and commercial fishing, marine farming and tourism industries
- Cultural matters of significance to Mana Whenua, including the mauri of water, mahinga kai, customary rights and kaitiaki initiatives.

Effective ESCs will not only avoid and/or minimise the adverse environmental effects listed above, but can also provide significant benefits and cost savings for projects, such as:

- Protection of site assets and reduced maintenance costs
- Reduced downtime and construction delays
- Meeting of legislative obligations and avoidance of prosecution or other non-compliance measures
- Community and stakeholder support.

A1.5 How this guideline was developed

In preparing this guideline a comprehensive review of recent national and international ESC research and control guidelines was carried out to acknowledge and understand current best practice procedures and guideline approaches. This was accompanied by a gap analysis which identified gaps and issues within TP90 and other ESC guidelines. This process helped to determine what should be included within this document.

Consultation was carried out through a series of workshops that drew on the technical experience and operational knowledge of a variety of external industry ESC practitioners, consultants and contractors in the Auckland region, as well as Auckland Council staff. Individual meetings were also held with Auckland Council staff involved in resource consenting and compliance for land disturbing activities. A workshop was held with Mana Whenua to seek feedback.

Feedback received from Auckland Council stakeholders and external industry stakeholders and practitioners was carefully considered prior to, and during, the guideline drafting and finalisation. The guideline was also peer reviewed at the scoping, draft and final stages.

The guideline development process is ongoing in terms of the education materials, and potential future updates, which will be communicated through the following webpage: aucklanddesignmanual.co.nz.

A1.6 Current regulatory framework for land disturbing activities

Land disturbing activities in New Zealand are controlled under the RMA. The purpose of the RMA is to promote the sustainable management of natural and physical resources. This purpose places a general duty on every person to avoid, remedy or mitigate any adverse effects of activities on the environment. Sections 9, 12, 13, 14 and 15 of the RMA restrict and regulate activities relating to land use; works in the coastal marine area; streams, rivers and lakes; and the diversion of water and discharge of sediment to the environment.

Authorisation to undertake land disturbances and the associated discharges is provided through a rule in a district or regional plan as a permitted activity, or through resource consent. Various consents may be required for land disturbing activities. Both permitted activities and resource consents typically have conditions which must be complied with, and are enforced by Auckland Council. The conditions are applied to ensure the environmental effects of the activity are appropriately minimised and within the consent authority's anticipated 'envelope of environmental effects' throughout duration of the project.

In addition to the RMA, the management of land disturbing activities in the Auckland region is currently subject to the provisions of the following statutory documents:

- *New Zealand Coastal Policy Statement (2010)* (NZCPS)
- *Hauraki Gulf Marine Park Act 2000* (HGMPA) (applies to the catchments and coastal waters of Auckland's east coast)
- *National Environmental Standard for Assessing and Managing Contaminants in Soil to Protect Human Health (2011)* (NES:CS)
- *Auckland Council Regional Policy Statement (1999)* (ARPS)
- *Auckland Council Regional Plan: Sediment Control (2001)* (ACRP:SC)
- *Auckland Council Regional Plan: Coastal (2004)* (ACRP:C)
- *Auckland Council District Plan* (operative district plans of the seven pre-2010 city and district councils of the region) (ACDP)
- *Proposed Auckland Unitary Plan (2013)* (PAUP).

As the PAUP progresses through the statutory decision process, increasing weight is afforded to its provisions. When the PAUP becomes operative it will replace the currently operative regional policy statement and regional and district plans. All projects involving land disturbing activities in the Auckland region must incorporate ESC as an integral part of development. Even small projects that do not require land use consent must still meet all the relevant conditions in the relevant permitted activity rules of the ACDP, ACRP:SC and the provisions of the PAUP, which must be given effect to.

The need for a resource consent, or whether the earthworks can be carried out as a permitted activity, should become clear once the appropriate location, area and volume of earthworks is known.

A higher level of control is required when there is a greater risk of significant adverse effects on the receiving environment as a consequence of discharge of sediment from land disturbing activities.

For earthworks that require consent, the ESC Plan will need to be submitted to Council for approval. Once approved, earthworks will often require a pre-start meeting between the plan preparer, contractor and Auckland Council compliance officer to discuss the project works.



A1.7 Mana whenua values

Consideration of Mana Whenua values during the earthworks phase includes two important aspects:

- An understanding of mauri
- The practical application of Mana Whenua values in the appropriate context.

A1.7.1 Mana Whenua and mauri

As kaitiaki, Mana Whenua have the responsibility of ensuring that the spiritual and cultural aspects of resources are maintained for future generations. This involves the ongoing protection of mauri from damage, destruction or modification.

Mauri is a concept recognised by Mana Whenua as the connection between spiritual, physical and temporal realms. Loosely translated as the life force or life essence which exists within all matter, mauri sits at the very core of sustainable design for Mana Whenua and Te Ao Māori – the Māori worldview.

An objective of the Auckland Regional Policy statement is “to sustain the mauri of natural and physical resources in ways which enable provision for the social, economic and cultural wellbeing of Maori”.

This concept of mauri is recognised within the Auckland region’s regional and district plans, which mention:

- The council is committed to recognising Mana Whenua values associated with freshwater and enabling kaitiakitanga
- The mauri of freshwater and the relationship of Mana Whenua with freshwater is recognised and provided for
- The protection and restoration of the mauri and waiora of the rural and coastal environment of Tāmaki Makaurau continue to be of high priority to Mana Whenua of Tāmaki Makaurau.

A key concern of Mana Whenua is the effect on the mauri of water through the pollution of streams, rivers, catchments and harbours. This can be due to sediment entering waterways, loss of riparian margins, and the loss of native habitat to support native flora and fauna.

Degradation of freshwater quality can also affect the ability for customary harvest and manaaki due to depletion of, or in some cases the absence of, traditional mahinga kai resources. Modification or destruction of wāhi tapū and wāhi taonga is another potential effect of freshwater degradation.

The revival and enhancement of mauri should be a focus during the design and construction phases of an earthworks project through:

- A holistic approach to resource management
- Protection of habitats of edible plants and native aquatic life, which are traditional sources of food for local Māori
- Avoiding the destruction of, and/or restoring a buffer of native vegetation alongside waterways
- Water conservation
- Avoiding mixing waters from different sources.

Examples of different states and sources of water in the Māori context are provided below. It is also important to consider these, as they relate to how water is changed through urbanisation.

- *Wai-ora*: (pure water), which is water in its purest form
- *Wai-maori*: (freshwater), which is referred to as ordinary water that runs free or unrestrained and has no sacred associations
- *Wai-kino*: (polluted), which is where the mauri of the water has been altered through pollution or corruption and has the potential to do harm to humans
- *Wai-mate*: (dead water), which is where the water has lost its mauri and is dead. It is dangerous to humans because it can cause illness or misfortune
- *Wai-tai*: (salt or water from the ocean), which also refers to rough or angry water as in surf, waves or sea tides
- *Wai-tapu*: (sacred water), which is water that is used for ritual and ceremony.

A1.7.2 Application of Mana Whenua values

Te Aranga Design Principles¹ have been developed to provide a clear process for positive engagement with Mana Whenua to shape our built environment and acknowledge our position as a city distinguished by the world's largest population of Māori. The Te Aranga Design Principles arise from a widely held desire to enhance Mana Whenua presence, visibility and participation in the design of the physical realm and are founded on intrinsic Māori cultural values. These core values have been acknowledged by Mana Whenua as appropriate for the Auckland region:

- *Rangatiratanga*: The right to exercise authority and self-determination within one's own iwi / hapū realm
- *Kaitiakitanga*: the exercise of guardianship by the tangata whenua of an area in accordance with tikanga Maori in relation to natural and physical resources; and includes the ethic of stewardship
- *Manaakitanga*: the ethic of holistic hospitality whereby Mana Whenua have inherited obligations to be the best hosts they can be
- *Wairuatanga*: the immutable spiritual connection between people and their environments
- *Kotahitanga*: unity, cohesion and collaboration
- *Whanaungatanga*: a relationship through shared experiences and working together which provides people with a sense of belonging
- *Mātauranga*: Māori / Mana Whenua knowledge and understanding.

¹http://www.aucklanddesignmanual.co.nz/design-thinking/maori-design/te_aranga_principles

The key objective of the Principles is to enhance the protection, reinstatement, development and articulation of Mana Whenua cultural heritage and cultural landscapes enabling all of us (mana whenua, mataawaka, tauiwi and manuhiri) to connect to and deepen our 'sense of place'.

The Principles are intended as an enabling strategic foundation for Mana Whenua to adopt, customise and further develop in response to local context. The Principles also provide stakeholders and the design community with a clearer picture as to how Mana Whenua are likely to view, value and participate in the design and development of the built environment within their ancestral rohe.

The use of the Principles is predicated on the development of high quality durable relationships being developed between iwi/hapū, their mandated design professionals and local and central government. Robust relationships between these groups provide opportunities for unlocking a rich store of design potential.

The Principles provide guidance around culturally appropriate design processes and design responses that enhance our appreciation of the natural landscape and built environment. These same underlying principles can also help inform culturally appropriate ESC works, and examples include:

- *Mana* - The status of iwi and hapū as Mana Whenua is recognised and respected. For example:
 - The principle of mana can be demonstrated by use of cultural monitoring during excavation and Mana Whenua inspection of environmental controls
- *Taiao* - The natural environment is protected, restored and/or enhanced. For example:
 - Avoiding the mixing of sediment-laden water into marine and freshwater receiving environments aligns with the principles of Taiao and Mauri Tu
- *Mauri Tu* - Environmental health is protected, maintained and/or enhanced. For example:
 - The use of organic flocculants aligns with the principles of Taiao and Mauri Tu
- *Ahi kā* - Iwi/hapū have a living and enduring presence and are secure and valued within their rohe. For example:
 - Urupā (traditional burial grounds) are commonly located near watercourses and riparian/coastal margins. In alignment with Ahi kā, extra care should be taken when excavating near these zones
- *Mahi Toi* - Iwi/hapū narratives are captured and expressed creatively and appropriately
 - Enlisting Mana Whenua to provide cultural narrative prior to works can provide workers with an understanding of the rich cultural history and significance of the area. This aligns with Mahi Toi and Tohu
- *Tohu* - Mana Whenua significant sites and cultural landscapes and landmarks are acknowledged:
 - To align with the principles of Tohu and Mana, accidental discovery protocols should have an updated register of iwi who have Mana Whenua across the area surrounding a construction site. This will ensure a smooth process in the circumstance of an accidental find.



A2.0 Fundamental principles of erosion and sediment control

The following ten fundamental principles of ESC provide best practice guidance for minimising the adverse effects of erosion and sedimentation through the planning, construction and maintenance phases of a project. These should be followed when preparing and implementing an ESC Plan:

1. Minimise disturbance

Consistent with the concepts of water sensitive design (WSD – formerly referred to as low impact design) in Auckland Council guideline GD04, the identification and retention of existing site attributes should be incorporated into project designs, and earthworks should be minimised to the greatest extent practicable.

Land development should be fitted to land sensitivity and where possible, disturbance should avoid steeper slopes and other features such as streams and wetlands.

For any development, the total area of earthworks should be the minimum necessary to achieve the design outcome (including temporary works). The area of earthworks exposed to erosion at any given time should also be minimised through staging and progressive stabilisation.

All limits of disturbance should be shown on the ESC Plan. On-site limits of disturbance should be clearly shown using fences, signs and flags.

2. Stage construction

Carrying out bulk earthworks over the whole site maximises the time and area that soil is exposed and prone to erosion. By only exposing those areas that are required to be exposed for active earthworking at any one time, the duration of exposure and risk of erosion/sediment discharge can also be minimised. 'Earthworks staging', where the site has earthworks undertaken in smaller units over time with progressive revegetation, limits erosion.

Careful planning is needed. Temporary stockpiles, access and utility service installation all need to be planned. Earthworks staging needs to be planned in conjunction with the overall construction sequencing to ensure that it accommodates the contractor's requirements.

Earthworks staging and sequencing should be detailed in the ESC Plan.



3. Protect slopes

If slopes are worked and require stabilisation, simple vegetative covers like topsoiling and seeding may not be immediately effective and additional measures may be required. These are described in Section E3.0 of Part 2 - Practices.

Disturbance of existing slopes should be avoided wherever possible, particularly steep slopes which have a higher risk of erosion. Clean water runoff from above the site must be diverted away from the exposed slopes to minimise erosion.

Slopes should be highlighted on the ESC Plan, as well as limits of disturbance and any works and areas requiring specific protection.

4. Protect watercourses

Existing streams, watercourses and proposed drainage patterns need to be mapped. Earthworks and the removal of vegetation beside or within streams (including intermittent streams), wetlands and the coast, typically require consents from Auckland Council. The Council should be consulted on these matters prior to finalising project designs.

All watercourses, limits of disturbance and protection measures should be mapped on the ESC Plan. In addition, all practices to be used to protect new drainage channels should be marked, as well as crossings, disturbances and associated construction methods.

Further advice on works within a watercourse is provided in Section G of Part 2 – Practices.

5. Rapidly stabilise exposed areas

Disturbed soils should be progressively stabilised with vegetation, mulch, grassing or other stabilising methods after each earthworks stage and at specific milestones within stages. Available stabilisation methods are site specific and are described in Section E3.0 of Part 2 - Practices.

Time limits for grass or mulch covers should be clearly defined in the ESC Plan along with conditions for temporary cover (in the case of severe erosion) or poor germination.



6. Install perimeter controls and diversions

Perimeter controls and diversion measures help separate 'clean water' from outside the area of disturbance from 'dirty water' that has flowed through the disturbed area. Minimising the earthworks catchment by diverting clean runoff away from the works area is a critical erosion control measure. It also reduces the size of sediment control devices necessary for any given works area. Perimeter and diversion controls can also retain or direct sediment-laden runoff within the site. Common controls are diversion drains and earth bunds. These are detailed in Section E2.0 of Part 2 – Practices.

The type and extent of perimeter or diversion controls should be outlined in the ESC Plan, along with design parameters.

7. Employ sediment retention devices

Even with the best ESC practices, earthworks will discharge sediment-laden runoff during and immediately following storms. Along with erosion control measures, sediment retention devices are needed to capture runoff so sediment generated can settle out and be retained on site. These are detailed in Section F1.0 of Part 2 – Practices.

The fine-grained nature of Auckland soils means sediment retention ponds will usually require flocculant treatment (flocculation) to maximise their efficiency. All sediment retention devices must be sized and maintained in accordance with the guideline, and must be appropriate for any given location within a site.

The ESC Plan should include sediment retention device design specifications, detailed inspection and maintenance schedules of structures, and conversion plans for permanent structures.

8. Get trained and develop experience

A trained and experienced contractor is an important element of an ESC Plan, considering contractors are generally responsible for installing and maintaining ESC practices. Trained and experienced staff can save project time and money through proactive construction and maintenance of ESCs. Staff should be encouraged to become experienced in ESC. Key staff should also be assigned to provide that role, so that the appropriate level of experience and supervision is provided for each new project.



9. Adjust the ESC Plan as needed

An effective ESC Plan is modified as a project progresses from bulk earthworks to a fully developed site. Factors such as weather, changes to grade, altered design including drainage and formation of roads can require changes to initial ESC design.

The ESC Plan should be updated to suit site adjustments in time for the pre-construction meeting and initial inspection of installed ESCs. The Plan must also be regularly referred to and available on-site. Prior to the commencement of works, consideration should be given to how the site will change throughout the project, and how the ESC Plan will need to evolve.

Note: For consented sites, adjustments to the ESC Plan may require sign-off from Council.

10. Assess and adjust your ESC measures

ESC measures need to be inspected, monitored and maintained.

Inspection and maintenance of controls is especially important prior to and following a storm event. A large or intense storm can leave ESC measures in need of repair, replacement, reinforcement or cleaning out. Maintaining and repairing measures as soon as possible after a storm event will maximise the ongoing efficiency of the measures and minimise adverse environmental effects.

Assessment and adjustment is an important ESC practice –it must figure prominently in the ESC Plan. It is also important to assign responsibility for implementing the ESC Plan and monitoring control measures as the project progresses.



B

Erosion and sedimentation in the Auckland region



B1.0 Erosion and sedimentation in the Auckland region

B1.1 The erosion and sedimentation process

Erosion is the process whereby the land surface is worn away through physical, chemical or biological processes resulting in detachment and transport of soil particles. Sedimentation is the deposition of this eroded soil.

All development/works that involve land disturbing activities have the potential to result in the erosion of exposed surfaces and sedimentation within the receiving environment.

In order to implement successful ESC on a site, it is important to understand the processes that occur during erosion and sedimentation. The basic erosion process is outlined in Figure 3 below, and includes detachment, transport and deposition of soil particles.




Figure 3: The basic erosion process

Soil particles become detached when the erosive forces of wind, raindrop impact or flowing water exceed the soils resistance to erosion. Soil erosion in the Auckland region is primarily caused by rainfall, which initiates the detachment and transportation of sediment. Dislodged particles are transported down-slope through runoff and conveyed to the receiving environment where sedimentation occurs once the velocity of the runoff slows enough to allow the particles to fall out of suspension. Sedimentation is dependent on the velocities and volume of runoff, the size and weight of particles, and the area available for ponding. Some sediment is usually retained in the hollows and irregular surfaces across an earthworks site. Other sediment may be retained within devices, and some residual sediment (usually clays) will discharge into the receiving environment. The key to effective ESC is to understand these processes.

As noted, Auckland's clays are difficult to retain on site once mobilised by erosion. This is because clay particles are small and light, and have negative electrostatic charges which repel each other, such that they do not naturally clump together to form heavier particles. For that reason, erosion control is a fundamental practice in the Auckland region, and flocculation treatment is frequently required to cause the clays particles to clump together. This process is detailed in Section F2.0 of Part 2 - Practices.

B1.2 Types of erosion

The type of erosion that may occur on a site will depend on the different activities carried out on site and the type of environment in which they occur. The main types of erosion associated with land disturbing activities in the Auckland region are outlined in Table 1 below. Some of these erosion processes are illustrated in Figure 4.

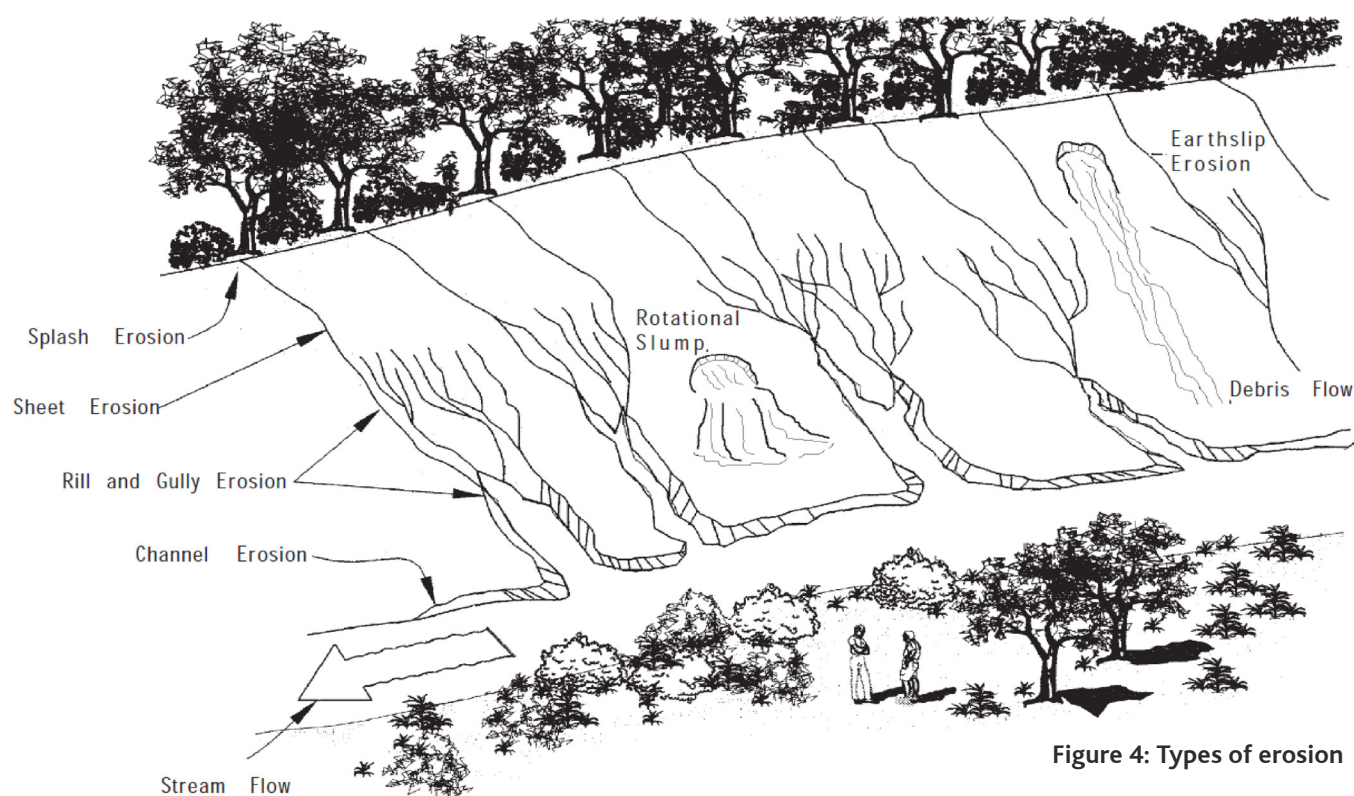


Figure 4: Types of erosion

Table 1: Types of erosion and their consequences

Type of erosion	Definition	Consequence
Splash erosion	When a raindrop hits an exposed soil surface, the soil aggregates are broken up and individual particles are displaced both vertically and horizontally. If erosion occurs on a slope, gravity will cause these particles to move down-slope. The potential for soil disturbance is increased during heavy rainfall due to higher rainfall intensity.	Splash erosion makes soil particles more vulnerable to erosion by runoff and increases the amount of sediment available to transport by runoff.
Sheet erosion	Sheet erosion is the uniform removal of soil in thin layers caused by rainfall impact and overland flow spread across the land surface. It occurs when rainfall intensity exceeds the infiltration rate of a soil and the capacity of available surface detention. It can cover large areas of sloping land and can go unnoticed for some time.	If not remediated it has the potential to gradually remove the nutrients and organic matter, and result in loss of productivity on slopes, and elevated sediment concentrations in receiving waters.

Type of erosion	Definition	Consequence
Rill erosion	Rill erosion is the removal of soil by runoff moving in concentrated flows along channels. Rill erosion occurs when uniform sheet flows are broken up into more concentrated flow paths.	The channelisation of the flow leads to greater energy flow which is able to detach and transport larger amounts of sediment.
Gully erosion	<p>Gully erosion is the removal of soils along deep (>300 mm) channels. Gullies are often distinguished from rills as being too large to step across.</p> <p>Gully erosion occurs when soil is removed by forceful concentrated flows that form channels.</p> <p>The following processes contribute to gully erosion in Auckland:</p> <ul style="list-style-type: none"> • Waterfall erosion at the head of a gully • Channel erosion • Raindrop splash • Diffuse flow from the side of a gully or from seepage • Slides or mass movement within the gully. 	Gullies are very difficult to remediate and often require cut and fill earthworks. They may develop rapidly and develop a significant amount of erosion, particularly in sandy or pumiceous soils and poorly compacted fill.
Tunnel erosion	Tunnel erosion refers to the formation of long cavities beneath the ground surface, whereby subsurface soil has been removed by surface water while the surface soil remains intact.	Eventually tunnels reach a point where the roof collapses resulting in potholes and the formation of erosion gullies.
Channel erosion	The erosion of stream channels results from the conveyance of concentrated flows with high velocities, which scour the channel boundaries. Channel erosion is a natural occurrence, but is significantly accelerated by increased runoff from urban development. This leads to eroding stream banks and larger channels.	Channel erosion is a significant source of sediment within watercourses and estuaries, particularly those bounded by urban catchments.
Mass movement	<p>Mass movement is the erosion of soil or rock by gravity-induced collapse. It is commonly initiated by groundwater pressure following heavy rain, but can also be caused by stream bank or earthworks undercutting at the base of a slope.</p> <p>Movement can both be rapid and near instantaneous (landslides, avalanches, debris flows) or slow and intermittent (earthflows and slumps). Mass movement is often noted following the removal of vegetation from critical slopes associated with land clearance.</p>	<p>Mass movement can cause major problems on earthworks sites and lead to considerable sedimentation.</p> <p>Geotechnical investigations and design are required to avoid mass movement during and after construction.</p>

Type of erosion	Definition	Consequence
Wind erosion	<p>Wind erosion is the process whereby soil particles are detached from the land surface and transported by wind. The effect of the process varies depending on factors such as particle size and composition. There are three ways that soil moves due to wind:</p> <ul style="list-style-type: none"> • Creep: larger particles that are not able to be suspended may roll along the surface • Saltation: wind-blown particles skip or bounce along the surface detaching more particles where they land • Suspension: fine particles are detached by saltation and lifted and carried away as dust. 	Wind-blown sediments (dust) from earthworks sites can be a significant form of air pollution. Stabilising exposed surfaces is the only long-term means of preventing wind erosion.

B1.3 Factors influencing erosion

The primary factors that influence the amount of soil loss from earthworks sites are:

- Weather
- Topography
- Soil characteristics
- Ground cover
- Duration of soil exposure
- Rainfall intensity.

These factors should be considered during the initial planning stages of earthworks in order to effectively control and reduce the amount of erosion that may occur on site.

B1.3.1 Weather

Weather is an important factor to consider when planning and implementing earthworks. Rainfall and wind have the potential to initiate erosive processes and cause significant erosion and sedimentation issues.

Rainfall intensity, duration and frequency are the main factors that determine the volume of runoff at a given site. The potential for soil particles to become detached and transported becomes greater as these factors increase.

The Auckland region receives the most rainfall throughout the winter season (May – September), as indicated in Figure 5. During this time, careful consideration should be taken when designing control measures to accommodate increased volumes of rainfall. Auckland's annual rainfall and temperature patterns are also important factors to consider, as climate will determine the extent and growth rate of vegetation. As such, revegetation of areas should be scheduled accordingly so that ground cover can establish.

While potential erosion is likely to be more significant during higher rainfall months, erosive processes can occur at any time of the year and best practice erosion control must still be followed throughout the year. High intensity rainfall events can result in significant erosion and can be experienced at any time of the year, particularly in late summer and autumn. However, those types of event are less frequent and the periods between such events are longer, which allows the ground to infiltrate (absorb) more rainfall prior to runoff occurring.

Rainfall also varies spatially across the Auckland region. Further details on this spatial variation are available in the design rainfall maps appended to TP108 – *'Guidelines for Stormwater Runoff Modelling in the Auckland Region'* (or its successor).

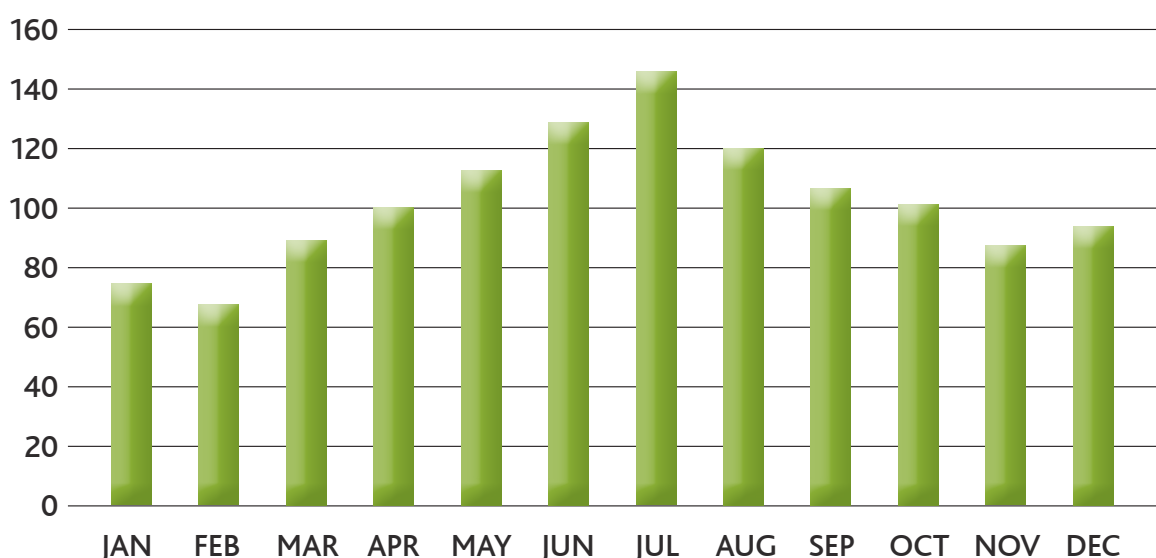


Figure 5: Auckland mean monthly rainfall (mm) 1981-2010

B1.3.2 Topography

Slope length and slope angle are critical factors in determining erosion potential because they have a significant role in determining the velocity of runoff. Increasing slope gradient increases potential flow velocity. Increasing slope length increases the catchment area of the slope and thus, increases the potential for flows to concentrate and the volume and velocity flows. As the slope of a site steepens and lengthens, the potential for soil erosion increases, particularly rill and gully erosion. As flows pass further down a slope, the potential for erosion increases. Therefore, the lower sections of slopes typically experience more significant erosion than the upper sections.

B1.3.3 Soil characteristics

Soil erodibility refers to the susceptibility of soil particles to become detached by erosive forces. It can be determined by the combination of soil characteristics listed in Table 2.

Table 2: Soil characteristics to consider

Soil characteristic	Explanation
Texture	Soil texture refers to the particle sizes that make up a particular soil and their relative proportions. The three major classes of soil particles are sand, silt and clay. Soils that contain higher proportions of fine sand and silts are considered more erodible. Erodibility decreases with clay content, as clay binds soil particles together. However, while clay is more resistant to erosion, once eroded, it is far more difficult to settle out and retain on site.
Organic matter content	Organic matter refers to the plant and animal litter component within soil. Organic matter is primarily found within topsoil and can reduce runoff and erosion potential as it often improves soil structure and increases permeability, water holding capacity and soil fertility.
Structure	Soil structure refers to the arrangement of particles into aggregates, and includes the size, shape and distribution of pores within and between the aggregate. When soil is compacted, water tends to run off rather than infiltrate, increasing the potential for erosion.
Soil permeability and porosity	Soil permeability refers to the ability of the soil to allow air and water to move through the soil. Soil porosity refers to the fraction of the total soil volume that is taken up by pore space. Soils of high porosity generate less runoff than soils with a low permeability. Organic matter and the associated biological activity in soils play an important role in maintaining porosity.
Soil moisture	During summer periods evaporation can lead to higher rates of wind erosion when soil moisture is low. In those conditions, soil particles are less bound by moisture and are more easily windborne, particularly when disturbed by construction vehicles and machinery.

B1.3.4 Ground cover

Ground cover has an important role in controlling a site's potential for erosion. Ground covers such as vegetation and impervious surfaces provide protection from erosive forces of raindrops, wind and flowing water.

On a vegetated site, the potential for erosion is greatly reduced as the ground cover provides instant protection through reducing the impact of rainfall, dispersing flows, slowing down runoff and maintaining the soil's ability to absorb water.

B1.3.5 Duration of soil exposure

The relevance of duration of soil exposure to potential erosion is complex, and relates to the frequency and probability of rainfall events of various intensities and duration. In simple terms, the longer an earthworks site is exposed, the greater the chance that it will be subject to rainfall. In Auckland, working from May to September presents a higher likelihood of experiencing more frequent rainfall and less opportunity for ground surfaces to dry between rainfall events, which in turn increases the total amount of runoff that occurs in any given event.

Minimising the duration of works will generally minimise the number of rainfall events experienced during a project. Staging works to minimise the area of ground exposed to erosion at any one time is an appropriate measure to minimise the erosion potential of high intensity rainfall events. A balance is always required between the overall duration of earthworks and the staging of works.

B1.4 Calculating sediment yield

The amount of sediment discharged from a catchment is the catchment's sediment yield (generally measured in tonnes/ hectare/year). The factors of rainfall, soil erodibility, slope, ground cover and duration of soil exposure combine to influence the amount of sediment that may be generated from an earthworks site and consequently, the amount of sediment that must be captured by sediment control devices to adequately minimise adverse effects on the receiving environment.

It is the topography of a site and the area of bare earth that will most influence the sediment yield, and thereby determine potential hotspots where ESC is required.

The scale of a sediment yield assessment needs to reflect the scale of the proposed earthworks. Careful consideration should be given to the practical benefit of undertaking a sediment yield assessment and if deemed necessary, the methodology to be used. Typically, the larger the earthworks proposed and the higher the sensitivity of the receiving environment, the more beneficial a sediment yield assessment will be.

B1.4.1 Potential calculation tools

The Universal Soil Loss Equation (USLE) is a tool that has been used in New Zealand to estimate the potential annual soil loss on a slope based on rainfall pattern, soil type, topography, vegetation cover and management practices. The USLE can help identify the scale of potential effects on receiving environments, and the risk associated with those sedimentation effects. **(Note:** The USLE will not help choose the most appropriate ESC practice(s) – it is only appropriate to identify those areas of a site with a higher sediment generating potential.)

A more recent advance in the field of estimating sediment yield has been the introduction of computer models. One such model used in recent large scale roading projects in the Auckland region has been the Groundwater Loading Effects of Agricultural Management Systems (GLEAMS) model. This is a physically-based model developed for continuous simulation of surface runoff and sediment losses on a field-scale. The model inputs are similar to the USLE, including land cover, soil type and slope in conjunction with a long-term climate record and other hydrological parameters. The GLEAMS model has been used to predict sediment yields with and without the inclusion of sediment control. It can be used to predict sediment yields for rainfall events with different recurrence intervals. The outputs assist in quantifying the downstream ecological effects. Further details on the GLEAMS model are available here: <http://tools.envirolink.govt.nz/dsss/groundwater-loading-effects-of-agricultural-management-systems>.

Other models include:

- CLUES (Catchment Land Use for Environmental Sustainability), which can predict mean annual farm, catchment and regional sediment yield
- SEDNET, a model that constructs sediment and nutrient budgets for regional scale river networks.



C

Selecting and using the
erosion and sediment
control practices



C1.0 Selecting and using the ESC practices

C1.1 The ESC development process

This section assists in the selection of the most appropriate ESC measures for a given site, and the development of an overall ESC Plan for the site. The process should follow the steps listed in Figure 6 below, in order to establish the management of the site from pre-start to completion of works.

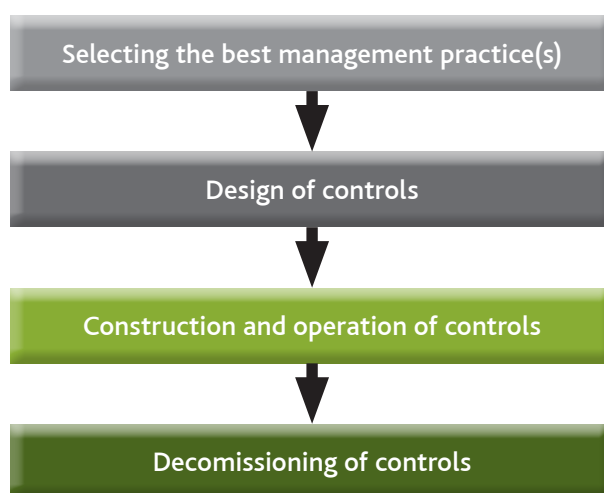


Figure 6: The ESC development process

C1.2 The treatment train approach

A 'treatment train' consists of multiple best management practices, operating in series and linked to improve the overall efficiency of contaminant (including sediment) removal. ESC measures should link functionally to form the treatment train as each measure has a specific role. This approach can be a combination of structural (e.g. sediment retention ponds, perimeter controls) and non-structural (e.g. earthwork season, staging) practices.

This treatment train approach should be considered during the early phases of project planning, and followed through to the completion of the project. The following sections of this document detail how to select the appropriate tools to ensure that this approach occurs.

C1.3 Selecting the best management practice(s)

ESCs are a suite of management practices that can be implemented to minimise the discharge of sediment during land disturbing activities. This section outlines the key considerations and strategies that should be used to determine the most appropriate ESCs for a site. It addresses how the key principles should be implemented throughout a project from the initial site assessment stage through to the implementation and decommissioning of controls. Figure 7 shows the three main steps involved when choosing and implementing ESCs for a site.

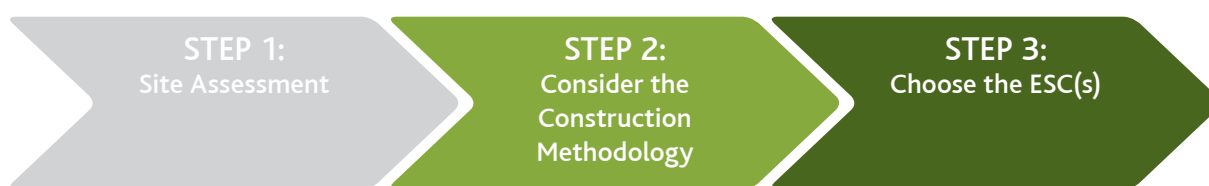


Figure 7: Steps in selecting the best practice option

C1.3.1 Step 1: Site assessment

Best practice management should be considered in every environment and a minimum level of control is required. There are, however, some particularly sensitive environments where additional controls may also be required. It is important to carry out an initial assessment of the area to identify the environmental values of, and risks to, the surrounding environment to determine if additional controls are needed beyond the typical requirements.

A site assessment of the area is required at a catchment scale to determine the wider environmental values and processes within the catchment that may influence the types of controls that can be used. This assessment should address the following (as a minimum):

- Land type, including:
 - Topography
 - Soil type
 - Hydrological patterns
 - Climatic conditions
 - Contamination
 - Groundcover
- Sensitivity of the receiving environment
- Community values and concerns.

During the site assessment, an assessment of the regulatory requirements should also be carried out to determine whether the activity requires a resource consent. If the activity does require a consent, this needs to be sought at the early stages of the project and should be done in consultation with Auckland Council.

C1.3.2 Step 2: Consider the construction methodology (for the overall development)

ESC should be considered during the initial development planning and detailed design stage of the project. A key principle is to minimise the areal extent of earthworks, and therefore, the area exposed to erosion and the generation of sediment discharges. Designers should be aware of the environmental constraints and associated risks of their site and design the project accordingly. When land development is matched to land sensitivity, areas prone to erosion can be avoided, reducing the number and size of ESCs required. For example, careful route selection or location of access and building platforms can result in a significant reduction in potential erosion and sediment discharge, with a corresponding reduction in the risk of sedimentation within the receiving environment.

Once the design has been finalised, the construction methodology can further avoid or reduce the need for ESCs through effective planning. The construction methodology outlines how the work will be undertaken in accordance with the key principles listed in Section A2.0.

By incorporating these non-structural ESC principles in the first instance, the need for structural ESC practices on site can be reduced. It is important to remember that preventing erosion is much more cost efficient, easier to implement and more effective than capturing sediment within a site. The construction methodology should address what types of practices are required and where they are to be located.

C1.3.3 Step 3: Choose the ESCs

Once a site assessment has been carried out and the construction methodology has been agreed, the extent of ESC practices required should be clear.

The following four fundamental principles of ESC should be considered in the first instance to prevent erosion, prior to selecting ESCs (refer Section A2.0):

- Minimise disturbance
- Stage construction
- Protect steep slopes
- Protect watercourses (and other sensitive features).

Once these key principles have been considered, suitable ESCs can be chosen for the site to manage any potential erosion and sediment that cannot be avoided.

Practices that manage erosion should be addressed first, followed by practices used to manage sediment discharge. Taking this approach will ensure that the number and size of sediment control devices is minimised.

Figure 8 below is designed to help you to choose the best management practices for a site. While the exact choice of ESCs will ultimately depend on individual site constraints, this flow chart acts as a guide to recommend what control is generally most appropriate based on industry experience.

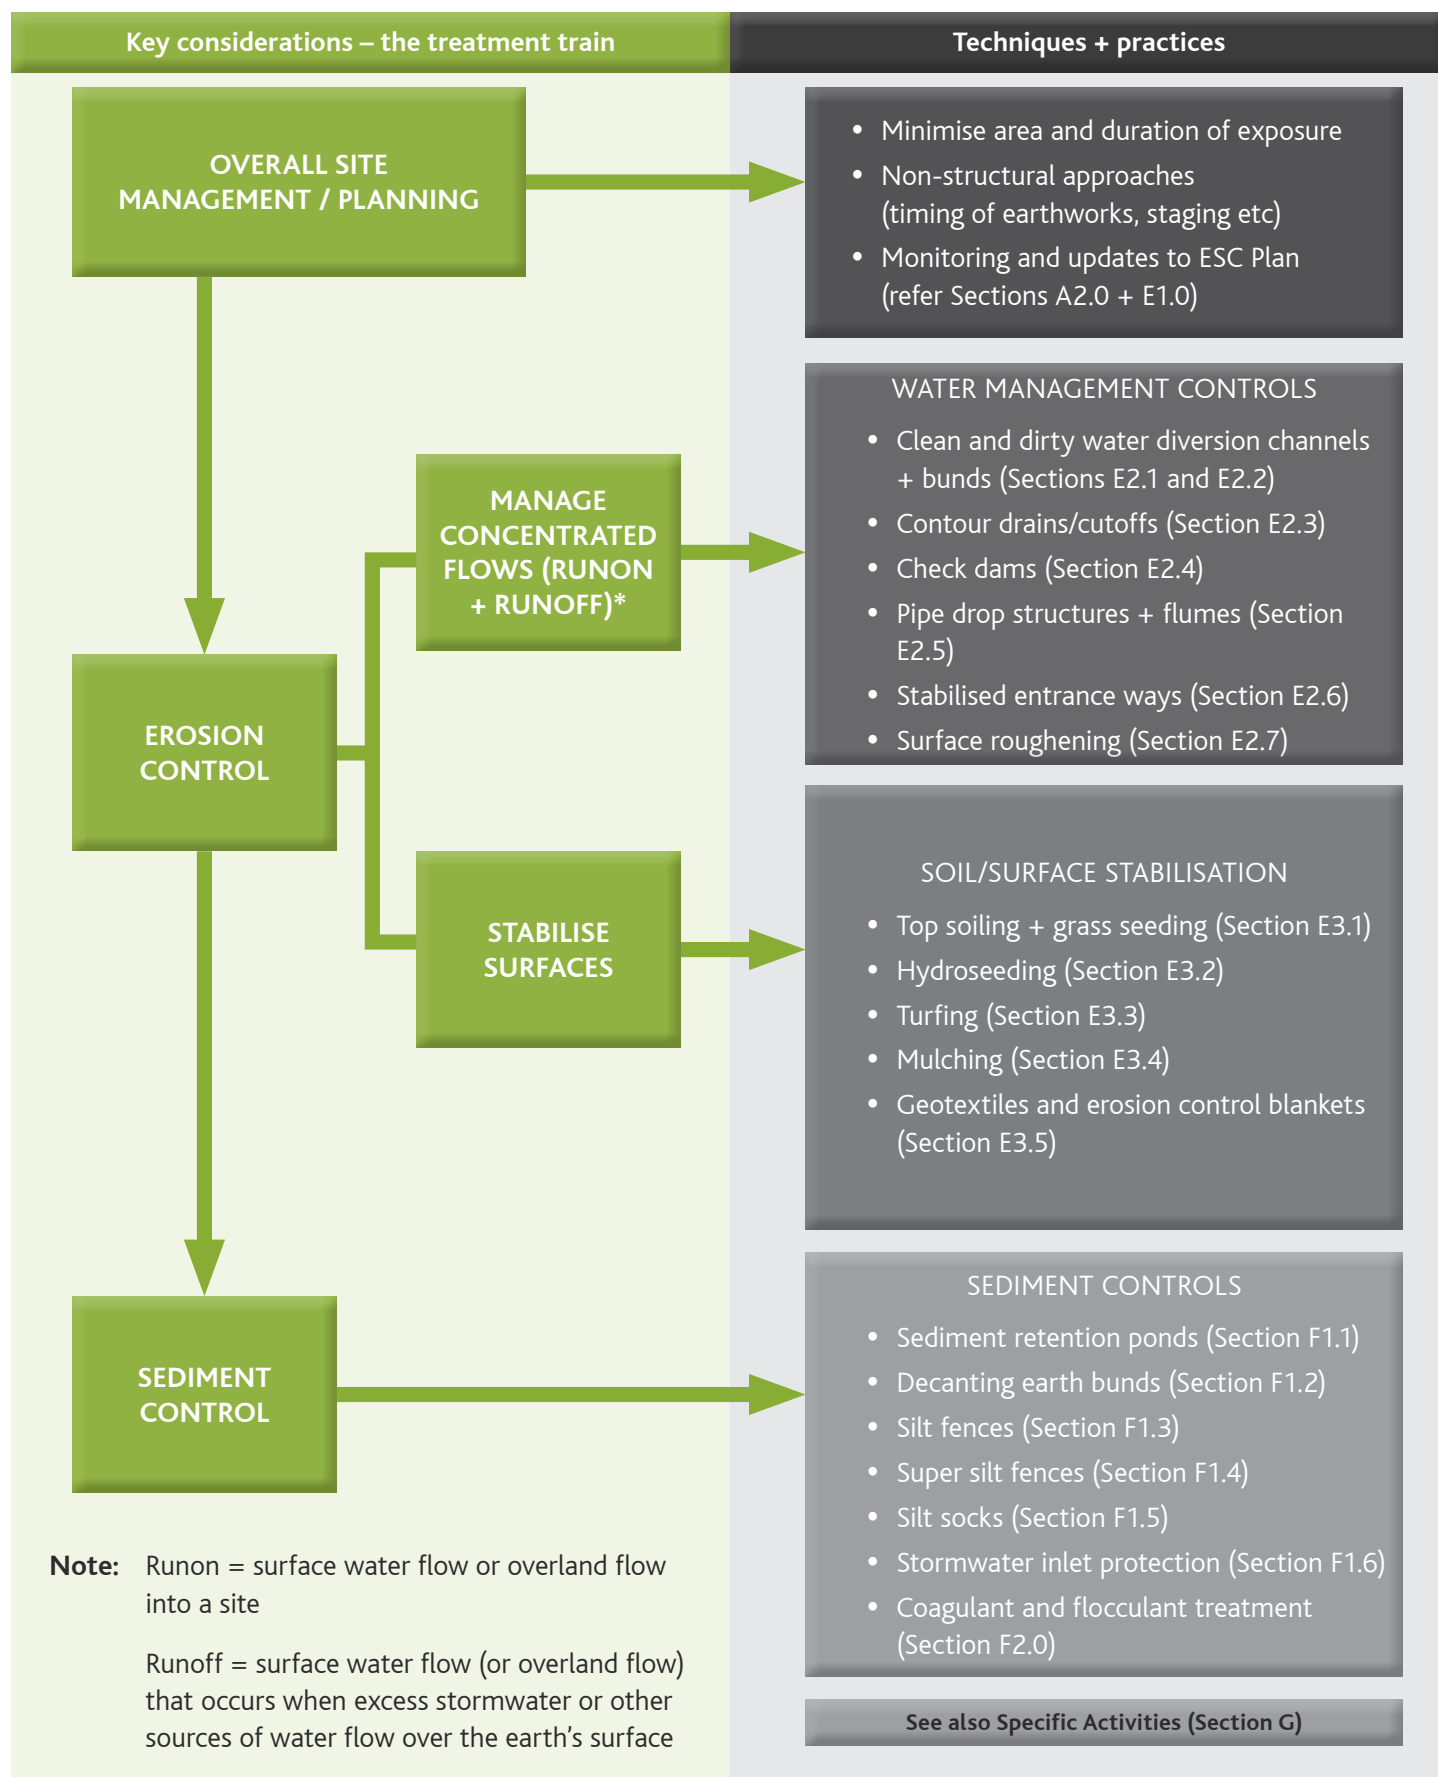


Figure 8: Process to select the best practice option(s) and develop an ESC Plan for development/construction

C1.4 Design of controls (preparing an ESC Plan)

The ESC Plan process described here outlines the process for a site that requires a resource consent; however, the same principles should be considered for earthworks that comprise a permitted activity.

An ESC Plan has an important role in conveying the key principles of ESC to the contractor and where necessary, Council. The plan needs to convey sufficient certainty to Council that the environmental effects of the earthworks can be managed within an appropriate 'envelope of effects' for that location and receiving environment, while providing flexibility for the contractor to modify their approach based on the practical site constraints. This will typically require an iterative process where the plan is refined based on discussions between the plan preparer, Council and the contractor. The plan needs to be easily understood with commonly recognised symbols to denote the different practices to be used (please refer to the recommended line types and symbols in Appendix D and the ESC site plan/drawing examples, in Appendix E for further guidance).

The ESC Plan is ultimately the tool used to ensure that all the elements identified in the site assessment and construction methodology are taken into consideration and managed accordingly.

An ESC management plan should include a site plan/drawing(s) in addition to diagrams, drawings, earthworks (cut/fill) plans, and/or narrative that details the set of practices that will be used. Refer to Appendix E for ESC site plan/drawing examples and recommended information to include.

For larger sites, the ESC management plan text should include the following (if not already shown on the ESC site plan/drawing):

- A site description including soil, slope (contours at an interval suitable for design), and total site area
- A detailed programme of works which identifies:
 - Details of the construction period/dates/timeframes/methodologies
 - Details of any staging plans for disturbed areas
 - The area of disturbance at each stage, including consideration of progressive stabilisation and minimisation of exposed soil
 - Length of exposed roads, tracks and trenches
 - Cut/fill volume details
 - Location and volume details of any stockpiles
 - Extent and type of vegetation to be removed or planted.
- Drawings and description of ESC practices to be implemented
- Details of the receiving environment that the project drains into and the pathways and distance to these
- The methodology for implementing these control measures (considering any staging of the works)
- A programme detailing the frequency and methodology of any inspections, monitoring and maintenance of measures (including checks proposed during rainfall events)
- Emergency procedures to be implemented if there is an accidental untreated sediment discharge to surface water.

C1.5 Construction and operation of controls

ESCs must be implemented prior to other site earthworks commencing. It is important to communicate the details of the ESC Plan with all relevant parties involved in the project. An appropriately experienced person should be appointed to oversee the implementation of the plan in addition to monitoring and maintenance of devices.

(Note: All perimeter controls and the main sediment retention devices must be installed prior to significant earthworks commencing.)

The contractor should take the following steps on site to ensure the plan is implemented and maintained in accordance with the key principles:

C1.5.1 Step 1: Define the work area in which earthworks are to occur

The limits of land disturbance should be clearly marked out on site with buffer zones to delineate areas to be protected. A site access point should be identified that restricts vehicle movement to designated tracks. **(Note:** This will most likely require specific measures to ensure this area does not become a source of sediment.)

C1.5.2 Step 2: Implement perimeter erosion controls

All clean water diversions should be implemented first on site to minimise the site catchment. As-built plans must be prepared for these devices to confirm compliance with the guideline requirements.

C1.5.3 Step 3: Implement primary sediment retention controls

The primary sediment retention controls should then be installed to capture and retain sediment generated within the site. This includes practices such as sediment retention ponds, decanting earth bunds, silt fences and outlet protection.

Subject to the scale of these devices, interim controls such as silt fences or super silt fences may be appropriate to control runoff from these construction activities. As-built plans must be prepared for these devices to confirm compliance with the guideline requirements.

C1.5.4 Step 4: Protect topsoil and manage stockpiles

If topsoil is to be removed and stored on site during works, it must be stabilised, especially if it is not located within the perimeter controls. Stockpiles should be located away from water bodies and the driplines of protected trees.

C1.5.5 Step 5: Progressively deploy internal ESCs

As works progress, the erosive potential of a site should be minimised through the fundamental principles identified in Section A2.0. Sediment control measures need to be monitored and potentially adjusted or relocated as works progress throughout the site. Where this occurs, the altered or new device must be appropriately sized and as-built. **(Note:** For consented activities, such changes may require sign-off from Council.)

C1.5.6 Step 6: Progressively stabilise the site as works progress

The area of disturbance should continue to be minimised throughout the project. Any areas which will remain unworked for long periods of time, or any works that have been completed, should be stabilised as soon as possible.

C1.5.7 Step 7: Set up and follow a management and monitoring system

Copies of the ESC Plan should be kept on site and updated with variations as they occur. Any specific requirements of resource consents should be complied with throughout the lifetime of the project. Unless otherwise specified in a resource consent, weekly monitoring of all control measures should be carried out to ensure everything is operating correctly. Monitoring should also be undertaken immediately before and after any significant rainfall.

Accumulated sediment should be cleaned out from most devices when they are 20% full (see Part 2 for details of each practice). Accumulated sediment should be disposed of on site in a location that cannot result in discharge from the site. If soil is contaminated, it should be managed appropriately and in accordance with the NES for Assessing and Managing Contaminants in Soil to Protect Human Health (2011) (NES:CS).

C1.6 Decommissioning of controls

Once the site is permanently stabilised, the ESCs can be removed. Prior to removal, any sediment within these controls should be disposed of appropriately and care should be taken to ensure it does not discharge into any waterway or stormwater network. Any disturbed areas left by the controls should be stabilised immediately.

(Note: For sites that require resource consent, removal of ESCs may require approval by Council.)

C1.7 Compliance

The ESC Plan and selected management practices will need to be implemented in compliance with the permitted activity criteria or resource consent conditions.

In implementing the ESC, the following steps are also recommended to ensure compliance and effective implementation:

- A start-up meeting with the ESC Plan preparer, contractor and regulator (only for consented sites)
- Allocation of project roles and responsibilities for ESC
- Implementation of a communications plan for internal and external communications on ESC. Items in the plan may include a toolbox meeting agenda item on ESC; complaints procedures; details of who needs to be communicated with, about what, when and how; and key contact phone numbers
- Identification of higher risk areas, e.g. sites of known archaeological significance, contamination or other sensitivity such as waahi tapu
- Implementation of accidental discovery protocols if required
- Weekly and post-event monitoring of devices
- Record keeping of compliance sheets.

C1.8 Other considerations

C1.8.1 Sustainability

Sustainability principles are embedded within the purpose of the RMA (outlined in Section 5). Ensuring that there is a focus on sustainability is of utmost importance when planning and executing any land disturbance project.

The concept of sustainability rests on the three pillars of environmental protection, social development, and economic development. These three pillars are inherently interconnected and significant benefits can be achieved by considering the effects of a land disturbance activity on these aspects.

Land disturbance activities link industry, communities, and the environment. By adopting sustainable principles from the outset of a project, many benefits can be achieved, including reduced costs, community buy-in, environmental compliance and restoration.

Consideration should be given to the themes and opportunities detailed in Table 3.

Table 3: Sustainability considerations for ESC

Theme	Opportunities
Governance	<ul style="list-style-type: none"> • Establish sustainability goals • Set sustainability priorities
Supply chain	<ul style="list-style-type: none"> • Prioritise locally sourced materials • Factor environmental and social costs into procurement processes • Ensure products are produced by companies whose values incorporate sustainability
Materials	<ul style="list-style-type: none"> • Consider the lifespan, recyclability and reusability of materials • Design for deconstruction and disassembly • Where appropriate, utilise the landscape and existing materials on site
Waste	<ul style="list-style-type: none"> • Design out waste from project conception • Implement waste management plans • Adopt the waste hierarchy into resource management practices (reduce, reuse, recycle) • Pursue zero waste
Plants / biodiversity	<ul style="list-style-type: none"> • Avoid vegetation removal to the extent practical • Eco-source plants • Use culturally and socially acceptable plants for the site / area (particularly for permanent landscaping)
Discharges	<ul style="list-style-type: none"> • Implement best management practices to avoid discharges to air, land and water

Theme	Opportunities
Energy	<ul style="list-style-type: none"> • Prioritise use of renewable energy • Adopt energy efficient practices
Water	<ul style="list-style-type: none"> • Measure water consumption and aim to minimise water use on site
Earthworks strategy	<ul style="list-style-type: none"> • Take a minimal earthworks approach / low impact design • Stage construction
Community	<ul style="list-style-type: none"> • Foster stakeholder participation • Support local industry • Take into account Crime Prevention Through Environmental Design (CPTED) principles • Adopt best practice health and safety, including safety and design.

C1.8.2 Safety

The *Health and Safety at Work Act 2015* (replacing the *Health and Safety in Employment Act 1992* and the *Machinery Act 1950*) requires a duty of care by those involved in ESC works to ensure that workers and other persons are not exposed to health and safety risks arising from the work site.

Safety in Design (SiD) is an important consideration prior to the establishment of works. Designers must be able to demonstrate that ESC solutions have considered mitigating the exposure of workers and other persons to harm. Hazards and risks associated with the full lifecycle of the ESC solution should be identified and adequate controls to eliminate or minimise the risks demonstrated. Designers must also have appropriate training in, and understanding of, the purpose and technical standards of ESC, as well as SiD principles.

Suppliers of ESC devices or material components also have a duty of care to ensure the goods supplied do not expose workers or others to health and safety risks.

In accordance with *Health and Safety at Work Act 2015*, the contractor has a duty to ensure the safety of all persons on and in the vicinity of the site. This includes the provision of a safe working environment, safe plant, safe systems and appropriate training, supervision and monitoring. Earthworks sites often require the contractor to establish and maintain a site-specific safety management plan (SSMP). In addition to covering the general hazards on site, such as plant movement and buried utility services, the SSMP should consider all health and safety aspects that are unique to ESC. These should be communicated to all parties prior to work commencing.

Part 2 of this guideline identifies specific ways in which safety should be incorporated into different ESC practices on a construction site.



C1.8.3 Cost benefits of ESC

There are a number of benefits and cost savings of implementing good ESC management for the lifecycle of a project. These include:

- Enhanced credibility and reputation of both contractor and principal
- Fewer public complaints with reduced potential for fines and/or litigation
- Reduced compliance costs
- Reduced water treatment costs
- Protected site assets and reduced management costs
- Reduced construction delays
- Improved and protected recreational and aesthetic values
- Avoidance of the cost of rectifying offsite effects, including time and physical works
- Avoidance of Council enforcement and associated costs in lost time, legal advice and fines.



C1.8.4 Ancillary construction effects

While this guideline only considers the erosion and sedimentation effects of construction, there are other effects that should be addressed when undertaking construction activities, including the construction of ESC practices detailed in this guideline. These may include the following effects or ancillary construction considerations:

- Noise and vibration
- Dust
- Ecological
- Heritage/cultural
- Geotechnical
- Contaminated land
- Existing infrastructure
- Social/economic.

Contaminated land can have a significant impact on how earthworks are carried out. When undertaking a site assessment it is important to consider the history of the site to determine any risk of soil contamination. Contaminated soil not only affects the environment, but also poses a risk to human health. Project planners/designers should therefore consult the NES for *Assessing and Managing Contaminants to Protect Human Health (2011)* and the relevant regional plans when assessing regulatory requirements.



2





Practices

SECTION D:
Overview of ESC
practices

SECTION E:
Erosion control
practices

SECTION F:
Sediment control
practices

SECTION G:
Specific activities





D

Overview of ESC practices



D1.0 Overview of ESC Practices

D1.1 Scope of Part 2

This part of the guideline outlines the ESC practices for earthwork activities that reflect the evolution of industry best practice and technological innovation. This part is split into four sections as follows:

- **Section D – Overview of ESC practices:** summarises the scope of Part 2 of the guideline, the practices included and the approach to new emerging practices/innovations
- **Section E – Erosion control practices:** outlines best practice non-structural approaches to erosion control, as well as water management controls and soil stabilisation practices
- **Section F – Sediment control practices:** outlines sediment control practices that are considered current best practice
- **Section G – Specific activities:** explains what practices are most relevant for specific earthworks activities, including dewatering, small sites, roads and utilities, works within a watercourse, works within the CMA, quarrying and agriculture (farmtracking and general earthworks only).

For each practice detailed in Sections E and F:

- Guidance is provided in relation to design; construction, operation and maintenance; and decommissioning (where relevant)
- The guideline is structured in such a way that the construction, operation, maintenance, and decommissioning subsections for each practice can be printed separately from the design subsections. This will enable contractors (or other users) to print out only the sections they need to take on site.

Additional guidance for contractors on practices is provided in the **construction quality checklists** in **Appendix C**. The purpose of these checklists is for contractors to complete on-site self-checks of construction quality for ESC practices. They are not intended as compliance or as-built checklists.

Recommended line types/symbols for example, ESC site plans/drawings are detailed in **Appendix D**. **Example ESC site plans/drawings** are provided in **Appendix E**. These are intended to provide guidance on what an ESC Plan should cover in terms of detail and content. Plans should always be tailored to the specific project and site.

D1.2 Current best practice methods and measures

The current best practice methods and measures covered in this part of the guideline include:

- Erosion control practices (Section E):
 - Non-structural approaches (Section E1.0)
 - Water management controls (Section E2.0)
 1. 'Clean water' diversion channels and bunds (Section E2.1)
 2. 'Dirty water' diversion channels and bunds (Section E2.2)
 3. Contour drains (cut-offs) (Section E2.3)
 4. Check dams (Section E2.4)
 5. Pipe drop structures and flumes (Section E2.5)
 6. Stabilised entranceways (Section E2.6)
 7. Surface roughening (Section E2.7).
 - Soil and surface stabilisation practices (Section E3.0):
 1. Top soiling and grass seeding (Section E3.1)
 2. Hydroseeding (Section E3.2)
 3. Turfing (Section E3.3)
 4. Mulching (Section E3.4)
 5. Geotextiles and erosion control blankets (Section E3.5).
- Sediment control practices (Section F):
 - Structural approaches (Section F1.0):
 1. Sediment retention ponds (Section F1.1)
 2. Decanting earth bunds (including T bars) (Section F1.2)
 3. Silt fences (Section F1.3)
 4. Super silt fences (Section F1.4)
 5. Silt socks (Section F1.5)
 6. Stormwater inlet protection (Section F1.6.).
 - Coagulant and flocculant treatment (Section F2.0).

Section G – Specific activities refers back to some of the above practices where relevant.

D1.3 New emerging practices/innovations

This guideline includes a comprehensive selection of current best practice ESC measures that have proven their effectiveness in the field. However, there continues to be ongoing development and innovation of ESC measures.

Auckland Council will consider the use of new emerging ESC practices/innovations not explicitly included in this guideline if the practice/innovation and performance can be demonstrated to be an appropriate alternative in line with the principles of this guideline.



E

Erosion control practices



This section focuses on erosion control and describes the non-structural (Section E1.0) and structural (Sections E2.0 and E3.0) measures in accordance with the principles of erosion control outlined in Section A2.0 of the guideline. Within this section, the control of erosion from an earthworks site has been considered from two aspects:

1. Controlling the volume and rate of water runoff from within and external to a site (water management controls)
2. Providing a protective cover against soil erosion using stabilisation methods (soil stabilisation practices).

On any earthworks site, both of these techniques will be required. However, the choice of which erosion control measure is used will depend on site-specific constraints and the project construction staging. It is rare for only one practice to be used. It is more likely that more than one practice is needed to achieve an appropriate level of erosion control.



Figure 9: Good example of staged construction and progressive stabilisation

E1.0 Non-structural approaches

Non-structural approaches to erosion control are closely linked to the fundamental principles of ESC detailed in Section A2.0 of this guideline (Part 1). The key principles (best practice management) of key relevance to erosion control are reproduced here for ease of reference. These principles and concepts provide guidance for ESC throughout the planning, construction and maintenance phases of a project.

E1.1 Minimise disturbance

The identification and retention of existing site attributes should be incorporated into project designs and earthworks should be minimised to the greatest extent practicable.

Land development should be fitted to land sensitivity and where possible, disturbance should avoid steeper slopes and other features such as streams and wetlands.

For any development, the total area of earthworks should be the minimum necessary to achieve the design outcome (including temporary works). The area of earthworks exposed to erosion at any given time should also be minimised through staging and progressive stabilisation (refer Figures 9 and 10).

All limits of disturbance should be shown on the ESC Plan. On site, limits of disturbance should be clearly shown using fences, signs and flags.



Figure 10: Northern Motorway construction site - minimising disturbance

E1.2 Stage construction

Carrying out bulk earthworks over the whole site maximises the area of soil exposed and prone to erosion. By exposing only those areas that are required to be exposed for active earthworking at any one time, the duration of exposure and risk of erosion/sediment discharge can also be minimised. Erosion is limited by applying 'earthworks staging', where the site has earthworks undertaken in smaller units over time with progressive revegetation.

Earthworks staging needs to be planned in conjunction with the overall construction sequencing to ensure that it accommodates the contractor's requirements. Temporary stockpiles, access and utility service installation all need to be planned.

Both earthworks staging and sequencing should be detailed in the ESC Plan.



Figure 11: Flume installed to protect steep slope

E1.3 Protect slopes

If slopes are worked and require stabilisation, simple vegetative covers like topsoiling and seeding may be less effective and additional measures may be required.

Disturbance of existing slopes should be avoided wherever possible, particularly steep slopes which have a higher risk of erosion. To minimise erosion, clean water runoff from above the site must be diverted away from the exposed slopes (refer Figure 11).

Slopes should be highlighted on the ESC Plan, as well as limits of disturbance and any works and areas requiring specific protection.

E1.4 Protect watercourses

Protection of watercourses is essential to avoid sediment discharges similar to that shown in Figure 12.

Earthworks and the removal of vegetation beside or within streams (including intermittent streams), wetlands and the coast, typically require consents from Auckland Council. The Council should be consulted on these matters prior to finalising project designs.

All existing watercourses, proposed drainage patterns, limits of disturbance and protection measures should be mapped on the ESC Plan. In addition, all practices to be used to protect new drainage channels should be marked, as well as crossings, disturbances and associated construction methods.

Further advice on works within a watercourse is provided in Section G4.0.



Figure 12: Sediment discharge as a result of not protecting the watercourse

E1.5 Stabilise exposed areas rapidly

Disturbed soils should be progressively stabilised with vegetation, mulch, grassing or other stabilising methods after each earthworks stage and at specific milestones within stages (refer Figure 13). Available stabilisation methods are site specific and are described further in Section E3.0.

Time limits for grass or mulch covers should be clearly defined in the ESC Plan, along with a requirement for temporary cover in the case of severe erosion or poor germination.



Figure 13: Rapid stabilisation

E1.6 Consider the timing of earthworks

Weather affects erosion potential both directly and indirectly. The direct relationship arises from the action of rain. Rain is a driving force of erosion, where raindrops dislodge soil particles and runoff carries the particles away. The annual pattern of rainfall and temperatures, by and large, determines the extent and growth rate of vegetation.

The Auckland region receives about 1200 mm of rainfall annually, with average monthly rainfalls greatest throughout the winter period. This significantly reduces the practical ability for earthworks to be undertaken in this period. Hence, there is an earthworks season in Auckland from 1 October to 30 April. The dryer and warmer summer months are the best time to schedule bulk earthworks activities.

For specific high risk activities like streamworks, it is critical to undertake works during a period of forecast fine conditions. Attention to a weekly and longer range forecast can assist in scheduling works and preparing sites in advance of forecast rainfall events.

E2.0 Water management controls – for concentrated water flows

Control of water runoff or concentrated water flows is one of the most important erosion control measures that can be done in a works area. Water runoff can either be 'clean' (i.e. devoid of sediment) or 'dirty' (i.e. carrying sediment). In an ESC context, 'clean water' usually refers to water from above a work site that has not run through the works area, and 'dirty water' usually refers to water that has run through a works area and requires treatment prior to discharge.

Water management control practices help to reduce water velocities and contributing catchment areas, with the overall aim of minimising sediment generation.

Guidance is provided below (Sections E2.1 to E2.7) on the common measures to control water runoff on earthworks sites. Guidance for each control/measure is split into the following subsections:

- Design
- Construction, operation and maintenance
- Decommissioning.

E2.1 'Clean water' diversion channels and bunds

E2.1.1 Design

Definition

This practice comprises a non-erodible channel and/or bund for the conveyance of clean water runoff that is constructed for a specific design storm.

A bund comprises earth formed into an embankment to hold back water. Hotmix diversion bunds are constructed of hotmix directly on the impervious surface and are often a replacement for a removed kerb and channel.

Purpose

These measures are used primarily to intercept and convey runoff to stable outlets, ideally at non-erosive velocities.

Clean water diversions (refer Figure 14) intercept clean water away from the works area. They minimise the potential for erosion damage by reducing the volume of water flowing over the site. By reducing this volume of water they also minimise the potential for sediment generation and the size of sediment control device needed. Hotmix diversion bunds can be used to divert runoff from impervious surfaces, which are typically motorway, roads, car parks or building platforms.



Figure 14: Clean water diversion used to isolate upper clean water flows from the works area

Conditions where practice applies

Clean water runoff diversion channels and bunds are mainly used in the following situations:

- To divert clean runoff water from above the works site, and divert it to non-erodible outlet(s)
- As a physical 'perimeter boundary' of an earthworks site to isolate the site and prevent clean water entering the area.

Limitations

Clean water diversions have the following limitations:

- The longitudinal gradients need to be less than 2%; otherwise a channel lining will likely be required
- All up-slope (clean water) diversions need a stable outlet
- They need to be sized and constructed for the site conditions and should not be confused with contour drains (refer Section E.2.3)
- In some examples (e.g. steep slopes and/or unstable ground), specific geotechnical design will be required to avoid failure of the diversion
- Subsoils that are erodible and/or prone to piping failures may be exposed along the invert of excavated diversions. If left unchecked, serious lower slope stability problems may result
- On steep slopes it is often difficult to construct a channel bank or drain with the required channel capacity. The location of the clean water discharge point also needs to be considered
- Access for maintenance can be difficult once construction activities have commenced.



Figure 15: Turfing scraped from within the site to stabilise the perimeter bund. The perimeter bund provides both clean and dirty water control

Key design criteria

Runoff diversions are essentially channels that are typically constructed across a slope. This requires a bund on the down-slope side to prevent flow from spilling out of the channel. Runoff diversions may take the form of:

- Drains, which are usually lined with an erosion-resistant material such as needle-punched fabric
- Existing or new stormwater reticulation systems
- A combination bank or bund with excavated up-slope channel
- An earthen bank, which is often made from compacted and stabilised topsoil (such as the perimeter bund in Figure 15)
- Hotmix.

There are many designs for runoff diversions; however the following key aspects are required:

In choosing the location:

- Determine the location of any diversion measures by considering the contributing catchment area, outlet conditions, topography, land use, soil type, length of slope, seep planes (if seepage is an issue) and the development layout
- Where practicable, choose a route for structures that avoids trees, existing or proposed service infrastructure, existing or proposed fence lines, and other natural or built features.

For design of up-slope clean water diversions:

- Formally design diversions where catchments exceed 5 hectares (ha)
- A standard clean water diversion arrangement may be used on sites below this threshold as shown in Figure 16 below
- Diversions must have sufficient capacity to carry the flow safely from a 5% annual exceedance probability (AEP) storm, plus a freeboard of 300 mm
- If the site is located within the 1% AEP floodplain, consider how any flood waters may be managed, and any upstream and downstream impacts that may result
- Include all calculations, design notes, drawings, etc. in the site erosion and sediment control plan (ESC Plan)
- All clean water diversions need to be stabilised with no exposed surfaces
- Where design velocities exceed 1 m/sec a channel liner is required to prevent scour
- Line exposed temporary diversions with a needle-punched geotextile fabric
- Outlets from all up-slope diversions must discharge water so that the erosion hazard to down-slope lands and waterways is no greater than that in the pre-development condition, up to the design storm event
- Include appropriate energy dissipation structures at the outlet of all diversions.

In designing the cross-section:

- The diversion channels should be parabolic or trapezoidal in shape
- Ensure the internal sides of the bund associated with the diversions are no steeper than 3:1, and the external sides no steeper than 2:1, as outlined in Figure 16 below.

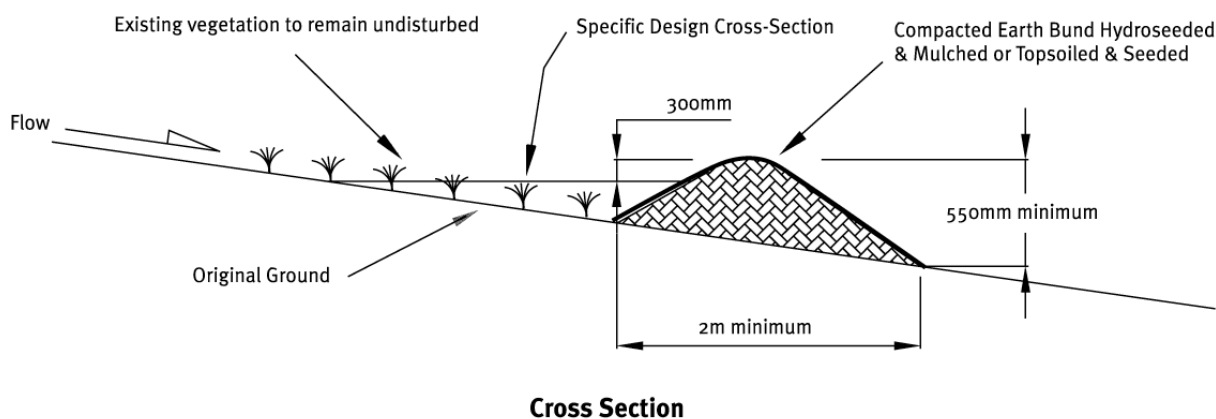


Figure 16: Cross-section of clean water diversion

As hotmix bunds (refer Figure 17) are generally used to divert motorway and road runoff from immediately adjacent work areas, these bunds are typically low, between 150-300 mm high and are generally shaped to allow crossing by vehicles and avoid flooding of the motorway or road. These bunds will direct runoff to a stabilised outlet, typically an existing or new stormwater inlet, catchpit manhole or similar. In the absence of these inlets, the bunds often discharge into small (150 mm) flexible pipes which convey the flows through the work area to suitable inlet devices. The capacity of these outlets is limited, which may require frequent spacing. Hotmix bunds are not appropriate for large catchments.



Figure 17: Hotmix bund diverting the motorway runoff to the catchpit

E2.1.2 Construction, operation and maintenance

Construction and operation

For construction and operation of diversion channels and bunds:

- Plan and construct all perimeter diversion works as part of the initial site establishment/development activities
- Prioritise these works and install the most important up-slope control first
- Define the route and survey it to achieve the correct gradient
- Construct drains with a uniform grade along the invert, as sudden decreases may cause sediment to accumulate causing the bank to be overtopped
- Ensure the bunds associated with the diversions are well compacted, and stabilised. Assess the risk of failure. If the consequences are high, specific geotechnical design may be required to ensure the stability and integrity of the structure
- Stabilise all diversion areas. One method is to carefully set aside and replace existing grass and topsoil sods in the invert of the newly constructed drain, or over the newly constructed bund (refer to Figure 15)
- Monitor diversions for erosion. Subject to the soils on site it is likely that erosion control will be needed where the gradients are greater than 2% or where the design velocities exceed 1 m/sec
- Ensure the finished cross-section meets all design requirements
- Provide an adequate outlet for each diversion. The outlet may be a stable channel (e.g. rip-rap, geotextile), vegetated or paved area, stable watercourse or pipe outlet. In all cases, the outlet must convey runoff to a point where outflow will not cause damage (erosion, flooding). Vegetated outlets should be installed before diversion construction, to ensure establishment of vegetative cover in the outlet channel.

Maintenance

Perimeter diversions require regular maintenance to ensure they keep functioning throughout their life. Maintenance requirements should include:

- Unless otherwise specified, inspect weekly and after every rainfall and during periods of prolonged rainfall for scour and areas where diversions may breach. Repair immediately, if required, to ensure that the design capacity is maintained
- Remove any accumulated sediment deposited in the diversion channel where there is a risk of overtopping due to a lack of freeboard
- Check invert and outlets to ensure that these remain free from scour and erosion. These points may require geotextile lining to avoid this effect
- Look for low spots, areas of water ponding, formation of tunnel gullies, sediment deposition and debris blockage
- Check for stabilisation cover and ensure full stabilisation cover remains where required
- Take particular care to protect against damage from earthmoving operations and reinstate the diversion if damaged.

E2.1.3 Decommissioning

For decommissioning of diversion channels or bunds:

- Remove diversions only when all disturbed areas below the clean water diversion have been stabilised
- Fill, compact and shape all disturbed areas to blend in with the finished landform
- Stabilise all areas disturbed as part of the removal process; apply seed and fertiliser, protect with mulch or erosion-control blankets if required.

E2.2 'Dirty water' diversion channels and bunds

E2.2.1 Design

Definition

This practice comprises a non-erodible channel and/or bund for the conveyance of dirty water that is constructed for a specific design storm.

Purpose

Dirty water diversions convey sediment-laden water within the disturbed area and direct it to a sediment retention device to enable it to be treated.

Conditions where practice applies

Dirty water diversions and bunds are used to divert sediment-laden water to an appropriate sediment retention device (e.g. sediment retention pond or decanting earth bund – refer Section F). They are typically located within or at the lowest extent of the disturbed area.

Limitations

Dirty water diversions have the following limitations:

- Where longitudinal gradients are greater than 2%, stabilisation may be required to prevent significant erosion
- They need to be sized and constructed for the site conditions and should not be confused with contour drains (refer section E.2.3)
- In some examples (e.g. steep slopes and/or unstable ground), specific geotechnical design will be required to avoid failure of the diversion
- Subsoils that are erodible and/or prone to piping failures may be exposed along the invert of excavated diversions. If left unchecked, serious lower slope stability problems may result
- On steep slopes it is often difficult to construct a channel bank or drain with the required channel capacity. The location of the sediment retention device (which the dirty water diversion will flow into) also needs to be considered
- Access for maintenance can be difficult once construction activities have commenced.

Key design criteria

Dirty water diversions are channels that are typically constructed across a slope (refer Figures 18 and 19). This requires a bund on the down-slope side to prevent flow from spilling out of the channel. Runoff diversions may take the form of:

- Drains, which can be lined with an erosion-resistant material such as needle-punched fabric
- A combination bank or bund with excavated up-slope channel
- An earthen bank, which is often made from compacted soil.

There are many designs for runoff diversions; however the following key aspects are required:

In choosing the location:

- Determine the location of any diversion measures by considering the contributing catchment area, outlet conditions, topography, land use, soil type, length of slope, seep planes (if seepage is an issue) and the development layout
- Where practicable, choose a route for structures that avoids trees, existing or proposed service infrastructure, existing or proposed fence lines, and other natural or built features.

For design of down-slope dirty water diversions:

- Formally design diversions where catchments exceed 5 ha
- A standard dirty water diversion arrangement may be used on sites below this threshold, as shown in Figure 18 below
- Diversions must have sufficient capacity to safely carry the flow from a 5% AEP storm, plus a freeboard of 300 mm
- Include all calculations, design notes, drawings, etc. in the Site ESC Plan
- Diversion gradients greater than 2% may need to be lined to minimise erosion
- On steep sites, construct a 'drop out pit' within the dirty water diversion (refer Figure 20) to allow heavier sediment particles to drop out before they enter the sediment retention device, reducing the load on the device. Drop out pits are approximately 500–1,000 mm deep and 1,000 mm wide. They are easier to maintain and typically cheaper to desilt than desilting the sediment retention device (refer to Figure 20)
- Where design velocities exceed 1 m/sec a channel liner may be required to prevent erosion
- Where practicable, ensure a uniform grade along the invert of the diversion. Increases in grade can cause scour, while sudden decreases in grade may cause sediment to accumulate causing the drain to overtop
- Outlets from all diversions must discharge to an appropriate sediment control device for treatment.

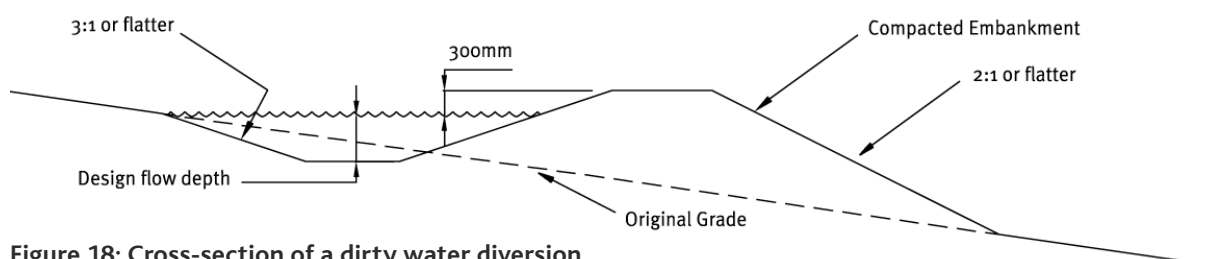


Figure 18: Cross-section of a dirty water diversion

Figure 19: Dirty water diversion bund directing site water to a sediment retention pond



Figure 20: Drop out pit

E2.2.2 Construction, operation and maintenance

Construction and operation

For construction and operation of dirty water diversion channels and bunds:

- Plan and construct all dirty water diversion works as part of the initial site establishment/development activities
- Define the route and survey it to achieve the correct gradient
- Construct drains with a uniform grade along the invert, as sudden decreases may cause sediment to accumulate causing the bank to overtop
- Ensure the bunds associated with the diversions are well compacted, and stabilised. In some instances, this may require specific geotechnical design to ensure the stability and integrity of the structure
- Monitor diversions for erosion. Subject to the soils on site it is likely that erosion control will be needed where the gradients are greater than 2% or where the design velocities exceed 1 m/sec
- Ensure the finished cross-section meets all design requirements
- Provide an adequate outlet for each diversion (i.e. dirty water to a sediment control device).

Maintenance

Dirty water diversions require regular maintenance to ensure they keep functioning throughout their life. Maintenance requirements should include:

- Inspect weekly and after every rainfall and during periods of prolonged rainfall for scour and areas where diversions may breach. Repair immediately, if required, to ensure that the design capacity is maintained
- Remove any accumulated sediment deposited in the diversion channel where there is a risk of overtopping due to a lack of freeboard
- Check invert and outlets to ensure that these remain free from scour and erosion. These points may require geotextile lining to avoid scour
- Look for low spots, areas of water ponding, formation of tunnel gullies, sediment deposition and debris blockage
- Check for stabilisation cover and ensure full stabilisation cover remains where required
- Perimeter diversions need particular care to protect against damage from earthmoving operations and should be reinstated if damaged.

E2.2.3 Decommissioning

For decommissioning of diversion channels or bunds:

- Remove diversions only when all disturbed areas above the dirty water diversion have been stabilised
- Fill, compact and shape all disturbed areas to blend in with the finished landform
- Stabilise all areas disturbed as part of the removal process; apply seed and fertiliser, protect with mulch or erosion-control blankets if required.

E2.3 Contour drains (cut-offs)

E2.3.1 Design

Definition

Contour drains or cut-offs are temporary excavated channels or ridges, or a combination of both, that are constructed across the contour of an area of land that has been disturbed by earthworks (see Figures 21 and 22).

Purpose

Contour drains are temporary in nature. They are often installed at the end of the day or when rain is forecast, and removed while earthworks are being undertaken.

The purpose of a contour drain is to break overland flow that is draining down disturbed slopes, by reducing the slope length, and thereby reducing the velocity and therefore, the erosive power of runoff. The drain also diverts sediment-laden water to appropriate controls via stable outlets.

Conditions where practice applies

The practice of using contour drains should be promoted on all earthworks sites, especially where there are large areas of exposed ground and long steep slopes. The specific scenarios for their application include:

- To reduce the overall slope length of a contributing catchment by breaking up the work area into smaller, more manageable zones so that the water velocities on these slopes are reduced, limiting the erosion potential of the water. They should be used at mid to lower slopes on all exposed areas.
- To assist with the diversion of dirty water flows towards sediment retention devices (e.g. a sediment retention pond, or decanting earth bund). (**Note:** They do not perform the same function as a dirty water diversion (refer Section E2.1), as they are more of a temporary feature. Also, they are not sized for a specific rain event unlike dirty water diversions.)
- To act as cut-offs on tracking activities to direct water into a stable watertable and/or outfall structure.

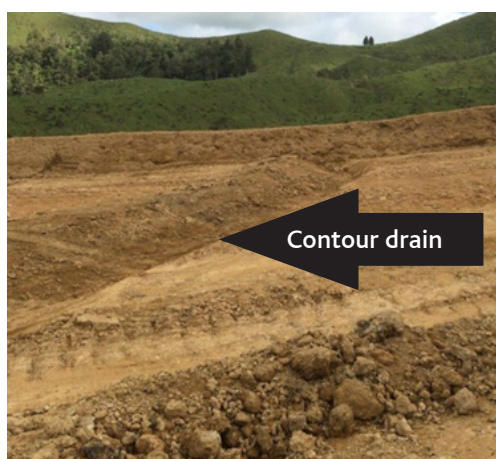


Figure 21: Contour drain

Limitations

Contour drains have the following limitations:

- They concentrate sheet flows, thereby increasing erosion potential. This is of most concern on steep slopes and in any vulnerable soils, such as uncompacted fills and weak soils. As such, contour drains must discharge to a suitable diversion channel
- They may not be an effective practice on very steep slopes (>30%) unless they are very closely spaced to achieve performance characteristics
- Unless the right sizing and spacing of drains is used, they have the potential to overtop during high intensity rainfall events
- Longitudinal contour drains with >2% grades will increase flow velocities and may promote erosion. Therefore, steeper contour drains need to be lined to prevent scouring within the channel invert
- Excessively flat contour drain grades mean sediment deposition is likely to occur, reducing capacity and potentially resulting in overtopping of the structure
- Due to their temporary nature, they may be a 'weak link' in the ESC Plan if they are installed too late or not sized/spaced appropriately.



Figure 22: Contour drain installed across access track

Key design criteria

Formal design of contour drains is generally not required due to their temporary nature. Although commonly called contour drains, this term is misleading as the drains need to be constructed slightly off the contour to ensure they drain appropriately.

The following design principles are critical to their effectiveness as an erosion control practice (also refer Figure 23):


- Minimum compacted bank height of 250 mm
- Minimum total depth of 500 mm
- Longitudinal gradients not to exceed 2% (otherwise lining may be required)
- Broad enough to create a low-profile bank so that large earthworking machinery can safely cross (If this is not achievable, a dedicated crossing using a removable culvert can be used.)
- Parabolic or square shape profile preferred to avoid potential erosion typically associated with "V" profiles
- Must discharge to a diversion channel
- Outlets may need to be lined with geotextile or other suitable material to prevent erosion
- No individual drain should have more than 0.5 ha draining into it.

Indicative maximum catchment slope lengths are provided in Table 4 below.

Table 4: Contour drain spacing

Slope of site (%)	Spacing (m) of contour drains
Less than 5%	50
5 – 10%	40
10 – 15%	30
15 – 30%	20

Specifications for contour drains are outlined in Figure 23 below.

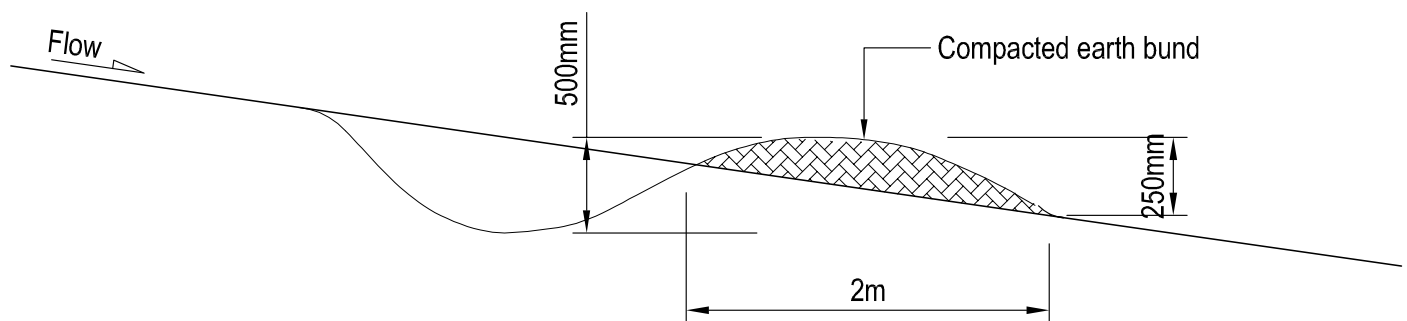

Cross - section

Figure 23: Contour drain cross-section

E2.3.2 Construction, operation and maintenance

Construction and operation

For construction of contour drains:

- Construct temporary contour drains across unprotected slopes within the working area at the end of each day's work, before site closedown or when rain is imminent
- Carefully consider the spacing and set out – as these are the critical factors in constructing effective contour drains. Start from an erosion proof outlet and work back
- Where possible, break the work area up using a series of more or less evenly spaced blocks using the slope length and spacing guide in Table 4
- Keep the invert gradient around 2% and make the drain as short as possible
- Avoid V-shaped drains created by a grader or bulldozer, as these can be a source of sediment. Tyre roll the completed drain to limit this
- Use an excavator or backhoe to construct a parabolic drain
- Compact all earth windrows and banks by tracking with construction plant.

Maintenance

The key items to check as part of the regular inspection of contour drains include:

- Repair or reinstate contour drains if damaged by machinery movement
- Inspect contour drains during rainfall or storms and repair as necessary
- Check the outfall for erosion and repair if required. It may be necessary to install a temporary flume or provide geotextile.

E2.3.3 Decommissioning

There is no formal decommissioning process for contour drains. Earthworks will simply recommence after the rainfall event.

E2.4 Check dams

E2.4.1 Design

Definition

Check dams are small dams made of rock rip-rap or other non-erodible material constructed across a swale or channel to act as grade control structures (refer Figure 24).

Purpose

The purpose of a check dam is to reduce the velocity of concentrated flows.

They are often placed in series down the channel (refer Figure 25) and used during construction to reduce invert scour in drains or channels that will be reworked, filled, grassed or otherwise stabilised.

Check dams are not intended to be a sediment retention practice. The dams work by temporarily ponding the water and releasing it at a more controlled rate, by overtopping the dam.



Figure 24: Check dam

Conditions where practice applies

Check dams are placed within temporary swales or channels that, because of their short length of service, may not be suitable for a non-erodible lining (e.g. geotextile), but still need some protection to reduce erosion.

They are used in either temporary or permanent swales/channels that need protection during the establishment of vegetative linings or other materials.

Limitations

Check dams have the following limitations:

- The contributing catchments for a complete series of check dams should not exceed 1 ha for slopes less than 10%
- With contributing catchments with a greater area or slope than this, specific engineering design is required
- They may not be an effective practice on steep channel grades, as they would need to be closely spaced to achieve the design criteria
- Check dams are water control measures only. They are not intended for sediment trapping purposes
- Channels will erode if the dams are spaced too far apart (especially on highly erodible soils)
- Check dams can be time consuming to construct, especially on steep slopes where a greater frequency of dams per unit length is required
- They may not be a suitable option to provide erosion protection when highly erodible soils are prevalent
- They should not be used within watercourses.

Key design criteria

The following design criteria apply to check dams:

- Temporary check dams are typically constructed of loose rock (rip-rap) or sandbags. Silt socks can also be used in low gradient channels (refer Figure 28). However, it is critical that they are constructed of competent material and do not themselves erode, or result in additional erosion
- The check dams can either be constructed with a 450 mm centre height or a 600 mm centre height. Table 5 is to be used to determine the spacing of check dams for channel slopes within the indicated ranges. Specifications are outlined in Figure 27

Table 5: Positioning of check dams

Slope of site (%)	Spacing (m) between dams with a 450 mm centre height	Spacing (m) between dams with a 600 mm centre height
Less than 2%	24	30
2 – 4%	12	15
4 – 7%	8	11
7 – 10%	5	6
>10%	Unsuitable – use stabilised channel or specific engineered design	Unsuitable – use stabilised channel or specific engineered design

- The maximum height of a check dam depends on the depth of the drain into which it is being placed. As a general rule, the centre height (spillway level) should be no higher than 600 mm
- All check dams must incorporate a spillway to direct flows over the centre of the structure (refer Figure 26) with the spillway elevation at least 150 mm to 200 mm lower than the crest of the structure
- To be effective, place check dams so that the toe of the upstream dam is at the same elevation as the centre height (spillway level) of the downstream dam, with the spacing between dams outlined in Figure 27
- When used on highly erodible soils, check dams should be placed on a needle-punched geotextile fabric to minimise the chance of water undermining the structure.



Figure 25: Check dams installed in series to act as a permanent water velocity control measure



Figure 26: Check dams installed with a spillway to direct flows over the centre of the structure. Sand bags placed directly below spillway provide a protective apron below the dam

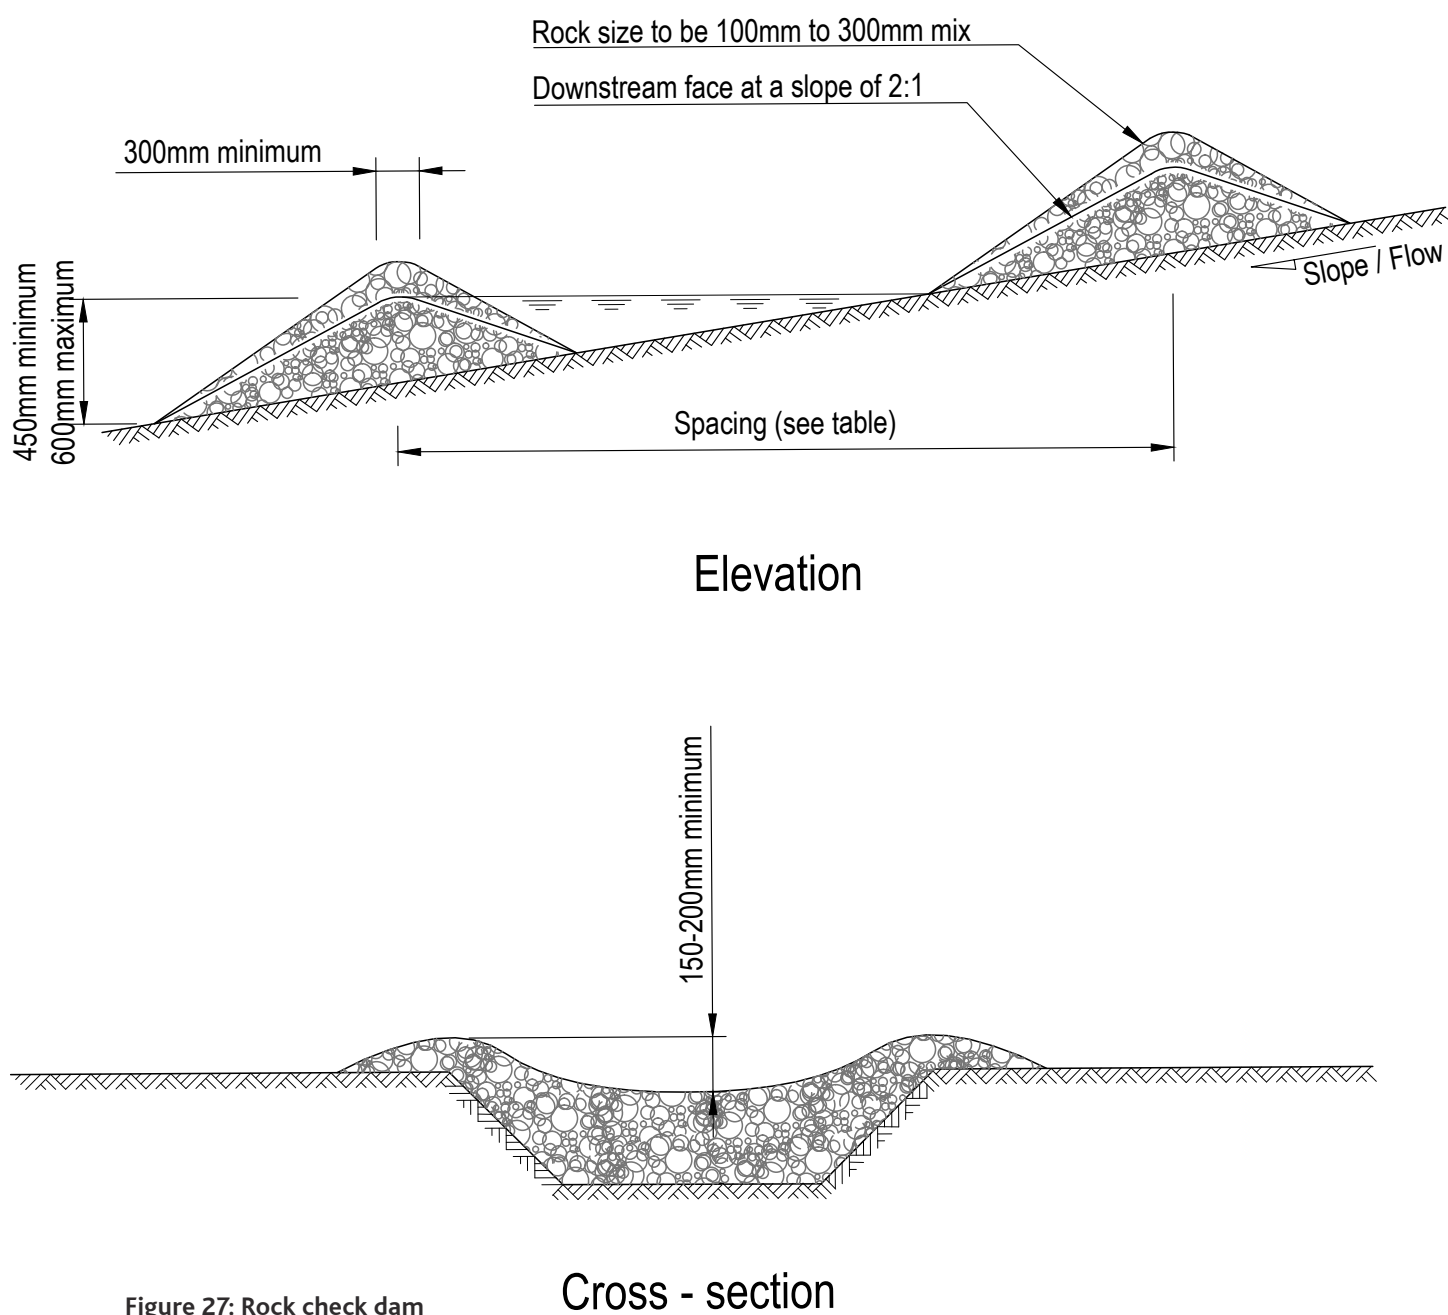


Figure 27: Rock check dam

E2.4.2 Construction, operation and maintenance

Construction and operation

For construction of check dams:

- Confirm the spacing/location of the dams in relation to the gradient of the drain or existing scour patterns
- Start from the bottom and work up the drain or channel
- Check that the invert of the drain or channel is stable above the top of the check dam
- Construct the centre of the check dam 150-200 mm lower than the outside edges to form a well-defined spillway
- Verify the dam location and spillway depth with an automatic level or other suitable equipment such as a 3 m straight edge and a spirit level
- Use loose rocks or extend sandbags approximately 300-400 mm away from the downstream toe of the dam to form a small protective apron below the spillway. This will armour the area below the dam when water runs over the spillway
- Place geotextile fabric beneath check dams constructed on erodible soils
- Make sure that the fabric used for sandbags is UV resistant
- Extend the toe of the fabric dams a least 1 m up-slope and then bury it in a 300 mm deep trench.

Maintenance

Key items to check as part of the regular inspection include:

- Repair or reinstate the check dams if destroyed by machinery movement
- Inspect the check dams after rainfall or storms and repair as necessary
- Check if water is outflanking the structures and look for scouring around the edges of the check dams. If there is scouring, increase the centre height (spillway height) and/or turn up the edges of the structures
- If scour is occurring between check dams then additional structures may need to be provided
- Check dams should be inspected for sediment accumulation after each significant rain event. Sediment should be removed when it reaches 40% of the original height or before this occurs.



Figure 28: Silt socks can be used as a check structure on a low gradient channel

E2.4.3 Decommissioning

For decommissioning of check dams:

- Remove check dams when no longer needed, and where possible, salvage all materials for re-use in future check dams or other works
- Do not remove check dams that are protecting grass-lined channels until a complete and sustainable cover has been achieved
- Areas disturbed by the removal process must be seeded, fertilised and protected with surface mulch or erosion-control matting if required.

E2.5 Pipe drop structures and flumes

E2.5.1 Design

Definition

A pipe drop structure or flume is a temporary pipe structure or constructed flume placed from the top of a slope to the bottom of a slope (refer Figures 29 to 32).

Purpose

The purpose of the device is to convey a concentrated flow of either clean or dirty surface runoff down a slope without causing erosion.

Conditions where practice applies

These measures should be used where concentrated flow of surface runoff is to be conveyed down a slope steeper than 3:1 (H:V). In general, two types of devices are used (pipe drop structures or flumes), as follows:

- Pipe drop structures or flumes may be either temporary or permanent structures
- Both pipe drop structures and flumes are commonly used in association with diversion channels or bunds, which act to collect and direct surface runoff into the structure
- Pipe drop structures or flumes may be used to divert flows down batters to the forebay of a sediment retention pond and also at the final point of discharge into the receiving environment
- Flumes may also be used to stabilise an actively eroding gully head.



Figure 29: Flume conveying clean water over the works area

Limitations

The following limitations apply to this measure:

- Severe erosion may result when the drains fail by overtopping, piping or pipe separation
- Pipe drop structures are suitable up to a maximum catchment of 1 ha before specific engineering design is required. Flumes may be used with contributing catchments of up to 5 ha (subject to compliance with the design criteria within this guideline)
- Damage to the pipe drop structure or flume may result from slippage or slumping caused by unstable foundation material
- Regular monitoring and maintenance is required to ensure that the structures are operating effectively.

Key design criteria

Temporary pipe drop structures or flumes may be fabricated from needle-punched geotextile fabric, concrete, steel or plastic half-round pipes, rock, sandbags, lay-flat or construction ply. Any number of products can be used, provided they can convey water safely over exposed soils or unstable slopes.

The following general design criteria are relevant:

- Always use flumes/pipe drop structures where slopes are steeper than 3:1 and where channelised surface runoff must be conveyed down the slopes
- The pipe drop structure or flume should be impervious and must prevent water from flowing under the structure (see Figures 30 and 31). For this reason, the use of a needle-punched geotextile in this application would require careful consideration and potentially two layers
- The height of the runoff diversion channel or bund (when measured from the invert) that is used to divert flows to the pipe drop structure or flume must be at least 2 times the pipe diameter or 2 times the height of the flume
- The inlet to the flume or pipe should include a 1 m long stabilised entry apron (e.g. by using geotextiles as outlined in Section E3.5) to minimise drawdown scour. This needs to be on at least a 3% grade
- The flume and pipe drop structure should be extended beyond the toe of the slope being protected. The outfall should be appropriately protected with an energy dissipation device (e.g. geotextile, sand bags, rip-rap).

Design details are outlined in Figure 32.



Figure 30: Geotextile lined flume



Figure 31: Wooden flume lined with impervious material

Pipe drop structures

For pipe drop structures (refer Figure 32):

- Table 6 provides guidance on the maximum catchment area draining into a pipe drop structure. For catchments larger than 1 ha, specific engineering design will be required
- The pipe drop structure should have:
 - A gradient no shallower than 3:1
 - An inlet bank (made of compacted material) or wing walls at the inlet of the pipe that are a minimum of 2 times the height of the pipe drop structure
 - Adequate provision for securing the pipe drop structure to the slope. As a minimum, the pipe drop structure is to be anchored every 4 m.

Table 6: Sizing criteria for pipe drop structures

Pipe diameter (mm)	Maximum catchment area (ha)
150mm	0.05ha
300mm	0.20ha
450mm	0.60ha
600mm	1.00ha
Specific design required	>1.00ha

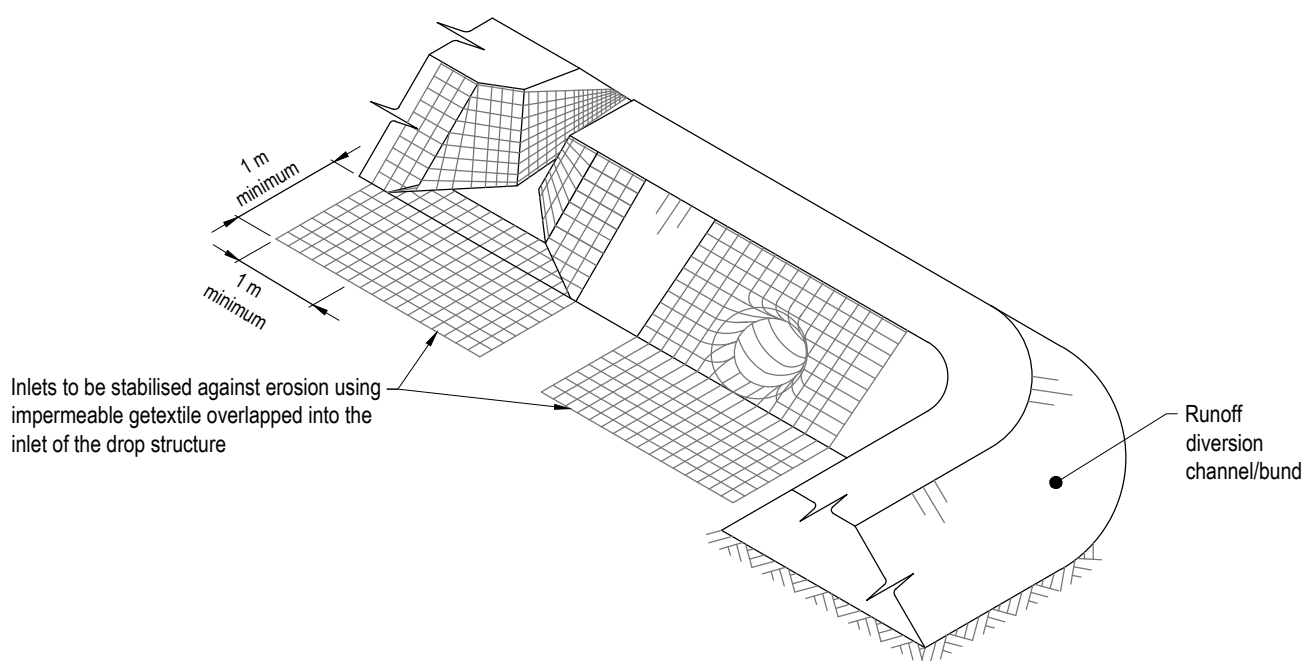
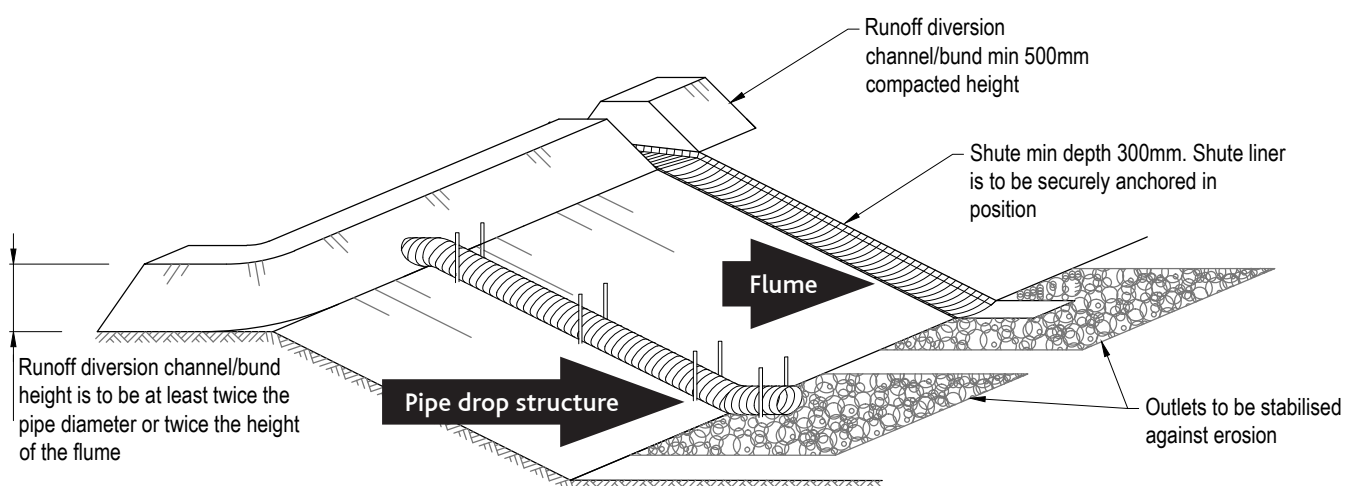


Figure 32: Pipe drop structure and Flumes

Flumes

For flume structures:

- Temporary flumes should be limited to the catchment areas outlined in Table 7.

Table 7: Sizing criteria for flumes

Catchment slope (%)	Maximum catchment area (ha)
>18%	2.5ha
<18%	5.0ha

- When contributing catchments exceed these thresholds, specific engineering design will be required
- The temporary flumes must provide:
 - An effective flume width of 1.5 m per ha of contributing catchment area
(**Note:** 'Effective width' approximates to the surface width of shallow flow in the flume, which will be marginally greater than the flume base width)
 - Gradient no shallower than 3:1
 - Minimum of 2x height of the flume of compacted material of inlet bank or wing walls at the top of the flume
 - Minimum of 300mm deep cut-off trench at top of flume to avoid undercutting the fabric
 - Minimum of 300mm flume sidewall height (or flume depth)
- Geotextiles have maximum flow rate limitations; consult the manufacturer for proper selection.

E2.5.2 Construction, operation and maintenance

Pipe drop structure construction and operation

A common cause of failure of pipe drop structures is water saturating the soil and seeping along the pipe where it connects to the runoff diversion channel. To eliminate this type of failure, backfill and compact properly around and under the pipe with stable material to achieve firm contact between the pipe and the soil at all points (refer Figure 33). In addition:

- Use rigid pipe material or flexible pipe material
- Pin/secure the structure to the slope in the required position at least every 4 m. Use no less than two anchors equally spaced along the length of the pipe
- Ensure that all pipe connections are watertight.

Flume construction and operation

A common cause of failure of flumes is outflanking of the entrance or scouring of the invert of the flume. This can be prevented by waterproofing the entrance of the flume by trenching in an appropriate impervious geotextile or plastic liner, so that all flows are channelled directly into the flume. In addition:

- Orientate flumes directly down-slope
- Wherever practicable, construct the flume on well compacted soils or undisturbed soils
- Ensure bund or wing walls are high enough and shaped so as to direct water into the centre of the flume
- Use compacted earth, sandbags or other measures as necessary to ensure water does not flow past the entry
- Provide a stabilised apron 1 m in width at the top of the flume (e.g. geotextile fabric), to minimise drawdown scour as water accelerates down the flume
- Ensure that the flume is deep enough to contain water
- Work to a minimum 300 mm depth
- Ensure that timber or other rigid construction flumes are adequately supported to ensure that neither movement, nor settlement, result in separation of joints
- Securely fasten two layers of fabric to the soil. Follow the manufacturer's specifications, or pin the fabric at 0.5 m intervals
- Provide a velocity dissipation structure at the bottom of the flume, such as sand bags or loose rock. Do not discharge water directly onto bare, unstable or erodible soils.



Figure 33: Pipe drop structures conveying upper water down an exposed slope

Maintenance

For maintenance of pipe drop structures and flumes:

- Inspect the pipe drop structure or flume weekly and after each rain event and immediately carry out any maintenance required
- Keep the inlet open at all times
- Check for evidence of water bypassing, undermining or overtopping the pipe drop structure or flume
- Check for scour at the base of the pipe drop structure or flume, or in the receiving downstream area. If eroded, repair damage and install additional energy dissipation measures
- If downstream scour is occurring, it may be necessary to reduce flows being discharged into the device unless other preventative measures are implemented
- Extend the length of the pipe drop structure or flume as earthworks progress and repair and/or modify the pipe drop structure or flume as required
- Keep pipe drop structures or flumes in place until runoff has been controlled and all disturbed areas have been stabilised, or until permanent stormwater systems have been commissioned
- Make sure that the pipe drop structures or flumes do not result in ponding onto inappropriate areas (e.g. active traffic lanes, material storage areas, etc.).

E2.5.3 Decommissioning

For decommissioning of pipe drop structures and flumes:

- Keep pipe drop structures or flumes in place until runoff has been controlled and all disturbed areas have been stabilised, or until permanent stormwater systems have been installed and commissioned
- Remove temporary pipe drop structure or flume materials and where possible, re-use and recycle
- Stabilise all areas disturbed as part of the removal process. Apply seed and fertiliser and/or protect the surface with mulch or erosion control blankets if required.

E2.6 Stabilised entranceways

E2.6.1 Design

Definition

Stabilised entranceways are stabilised areas located at any entry or exit point of a construction site (refer Figures 34 to 37).

Purpose

The purpose of a stabilised entranceway is to:

- Prevent site access points becoming sources of sediment
- Assist in minimising dust generation and disturbance of areas adjacent to the road frontage by providing a defined entry and exit point.

In some circumstances, a formal wheel wash or a vibrating cattle-grate system (shaker ramps) may be required to stop sediment being tracked off the site. A stabilised entrance way is not designed to remove mud or dirt from the wheels of vehicles exiting the site and these measures may need to be added to the entrance.



Figure 34 Stabilised entranceway

Conditions where practice applies

This practice should be used at all points of construction site entry and exit with a view to limit traffic movements to these entrances only.

Where necessary, this practice may be installed in association with shaker ramps or wheel wash facilities, as close as possible to the boundary of the works area.

Limitations

Stabilised entranceways have the following limitations:

- Stabilised entranceways will reduce sediment movement, but will not remove sediment from a vehicle. Care needs to be taken to implement other management techniques, such as wheel wash or stabilised parking and turnaround areas within the site to maintain site traffic in a 'clean' state. This will reduce the potential for vehicles to transport sediment onto road surfaces
- The use of a wheel-wash system in association with a stabilised entranceway can be expensive, but will provide higher efficiencies in terms of sediment removal
- Site management of traffic (i.e. preventing vehicles becoming a source of sediment by creating stabilised site parking, turnaround and laydown areas inside the site) is generally more cost efficient and effective in preventing sediment being tracked offsite than a wheel wash
- Stabilised entranceways should not be located in areas of concentrated flows, or next to watercourses or stormwater catchpits.

Key design criteria

Formal design of stabilised entranceways is generally not required; although the following design principles are required for them to be an effective practice:

- Stabilised entranceways should be located at the permanent site entry/exit point
- Locate all stabilised entrance ways so that vehicles cannot bypass these devices. Perimeter silt fences or bunds may assist in achieving this requirement
- Minimise the number of site exit points
- Show the locations of all site exits points in the ESC Plan
- Ensure the stabilised entrance drains back onto site. A speed hump can be used for this purpose
- Consider the length of time the site entry/exit will be in place and the expected traffic volumes and types. For projects with longer durations or large numbers of vehicle movements on and off the site, it is often more cost efficient to seal the exits from the start of the project, rather than manage the constant maintenance often associated with a site exit
- Use the specifications in Table 8 and Figure 35 to design stabilised entranceways. Achieving the specifications detailed below on a small site may be difficult. For small sites' guidance refer to section G2.0.

Table 8 Stabilised entranceway specifications

Design parameter	Specification
Aggregate size	50 – 150 mm washed aggregate
Minimum thickness	150mm
Minimum length	10 m
Minimum width	4 m

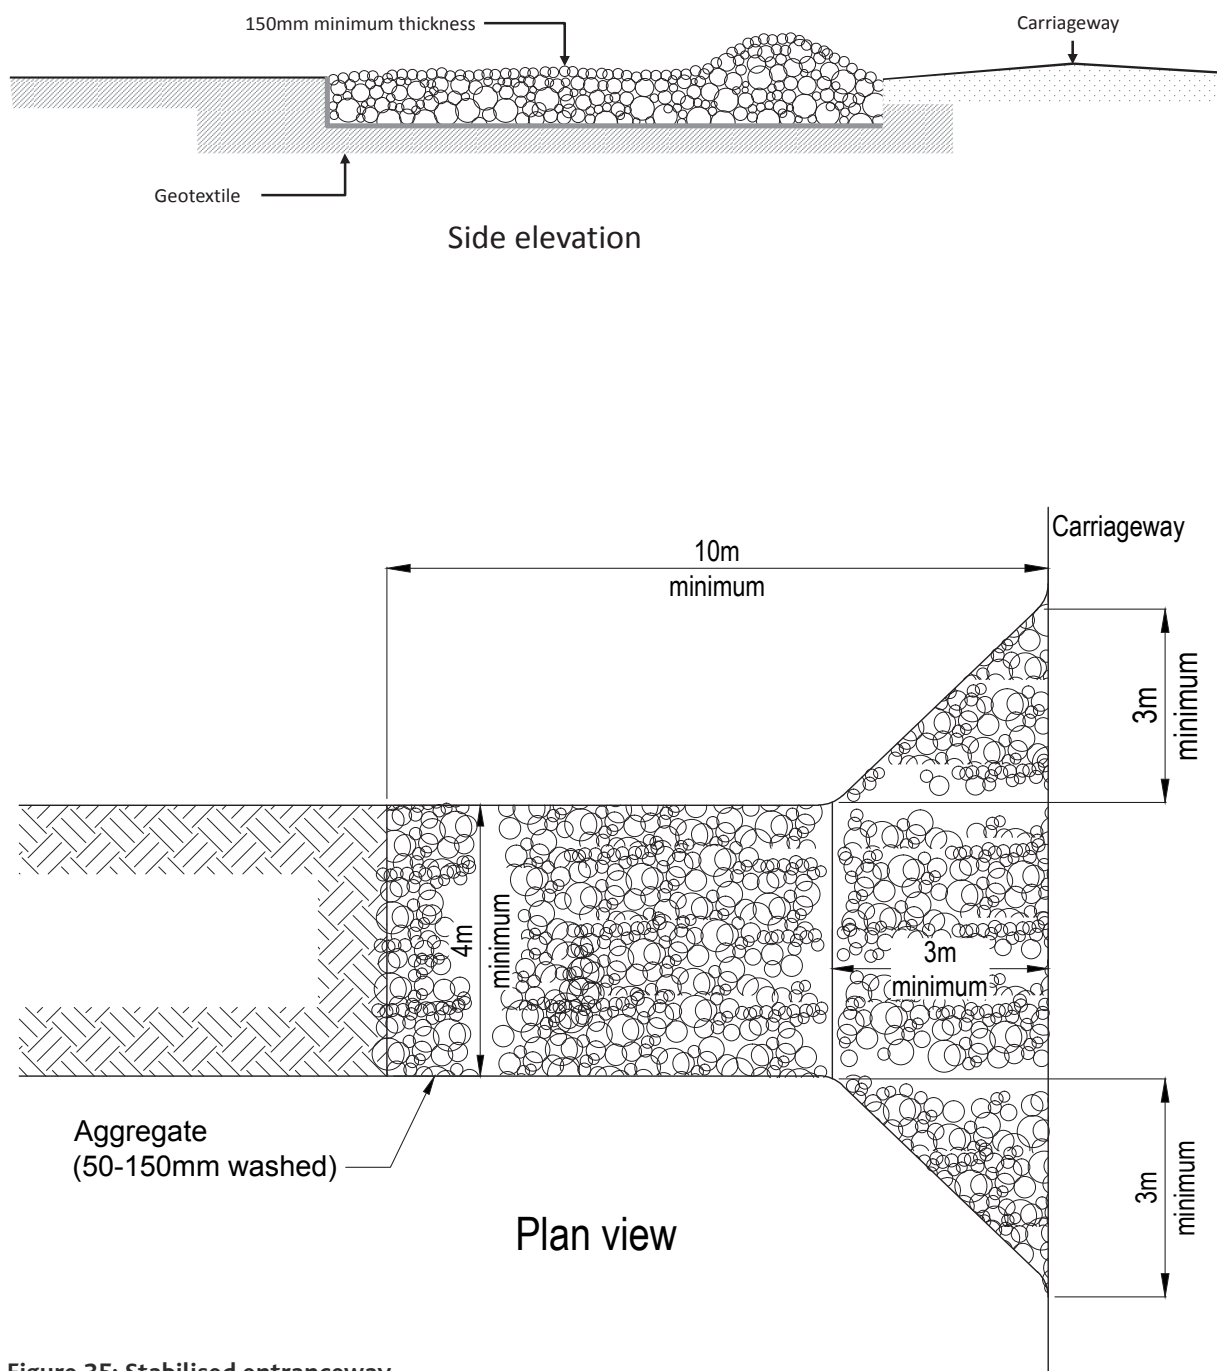


Figure 35: Stabilised entranceway

A shaker ramp could be in the form of a series of prefabricated “cattle stops” (refer Figures 36 and 37). When stabilised entranceways are used with a shaker ramp, apply the following criteria:

- Design shaker ramps a minimum of 5 m long to allow at least one full revolution of a truck tyre
- Where using cattle stops, use two cattle stops placed one in front of the other to provide adequate length
- Ensure the ‘teeth’ of the shaker ramp are deep enough so that material dropped from one vehicle is not picked up by the next
- Stabilise with rock the section of access road between the shaker ramp and the sealed pavement
- Ensure the runoff from the shaker ramp area and/or wheel-wash systems passes through an appropriate sediment retention device
- **Note:** Shaker ramps are only effective for minor volumes of dry material. Where the material to be removed is wet and or is located within the tyre treads, wheel washing will typically be required to remove this material.

When stabilised entranceways are used with a wheel wash, apply the following criteria:

- Ensure that a water collection and disposal methodology (such as water recirculation) is provided
- Direct wheel-wash runoff to an appropriate sediment retention facility within the site.



Figure 36: Example of truck wash and shaker ramp



Figure 37: Example of shaker ramp

E2.6.2 Construction, operation and maintenance

Construction and operation

For construction and operation of stabilised entranceways:

- Once a suitable location has been determined, clear the area of unsuitable material and grade the base to a smooth finish
- Place woven geotextile over this area and ensure this is appropriately pinned and overlapped as necessary
- Place aggregate from the construction site boundary extending for at least 10 m according to the specifications (Figure 35) and contour the aggregate to suit the entrance point (**Note:** Contouring can include a highpoint to act as a barrier to water flowing out of the site.)
- Provide drainage from the stabilised entranceway to an appropriate discharge point (This may require a sediment retention measure if a wheel wash is installed.)
- Consider the length of time the site entry/exit will be in place and the expected traffic volumes and types
- For projects with longer durations or large number of vehicle movements on and off the site, it is often more cost efficient to seal the exits at the commencement of works than to manage the constant maintenance often associated with a site exit.

Maintenance

Key items to check as part of the regular inspection include:

- Inspect weekly and after each rainfall event for general maintenance requirements
- Maintain the stabilised entranceway in a condition to prevent sediment from leaving the construction site (This may require several applications of new aggregate during the life of the practice.)
- After each rainfall, inspect any structure used to trap runoff from the stabilised entranceway and clean out as necessary
- When wheel washing is also required, ensure this is done on an area stabilised with aggregate/hotmix which drains to an approved sediment retention facility (**Note:** This sediment retention device should be isolated from additional surface flows and/or be specifically designed to include the additional flows from the wheel wash.)
- Add further aggregate as necessary when mud blockage becomes evident or when aggregate thickness is not to specification
- Remove sediment from sealed pavements by sweeping or vacuuming as necessary
- Do not wash any sediment into the stormwater system or any watercourse
- Supplementary street sweeping on adjacent roads may still be required in association with stabilised entranceways, at regular intervals.

E2.6.3 Decommissioning

In decommissioning stabilised entranceways, remove aggregate and geotextile, and stabilise the area. Ensure that traffic is kept off the area until permanent stabilisation is effective.

E2.7 Surface roughening

E2.7.1 Design

Definition

Surface roughening refers to the practice of roughening the surface of unstabilised (bare soil) earth surface; either with horizontal grooves across the slope, or by tracking with construction equipment (refer Figures 38 to 40).

Purpose

The purpose of surface roughening is to:

- Alter the construction surface soil profile to promote infiltration and increase flowpath lengths. Surface roughening is a technique that will change the roughness coefficient and therefore reduce the potential for sediment generation
- Help capture small quantities of sediment in the “hollows”
- Break up hard or compacted surfaces by ripping or scarification before seeding for either temporary or permanent revegetation programmes
- Trap seed and provide moisture sinks in the furrows, enhancing the establishment of vegetation.



Figure 38: Surface roughening with bulldozer

Conditions where practice applies

Surface roughening is a simple technique that should form part of any works methodology on slopes that have the potential to generate sediment discharges.

Limitations

Surface roughening has the following limitations:

- Surface roughening is a short-term measure to minimise erosion, and is not a form of stabilisation
- Surface roughening will not generally provide a satisfactory level of erosion control during high-intensity or long-duration rainfall events. Therefore, the technique cannot be relied on as the only form of control. It will require other devices to assist with the control of sediment from the site
- Ripping or scarification may allow water to enter dispersible soils or soils that are vulnerable to tunnelling, thereby exacerbating erosion
- Cut batters in highly erodible soils should not be roughened to the extent that scarification lines are likely to collect water in channels or rills
- Very dry, fine-textured soils should not be surface roughened, as they may be prone to pulverisation, making them more susceptible to detachment and transport by either wind or water.

Key design criteria

No formal design is necessary for the construction of surface roughening. However the following principles apply:

- Intercept water that flows onto the works area and divert it away from the area(s) to be roughened prior to undertaking the works
- Fill existing rills before roughening a batter face. Roughening must be done up and down the face so it leaves a cleat mark across the contour, as shown in Figure 40
- Track-walking must leave well-defined cleat impressions in the soil, parallel to the contour. This is necessary in order for the creation of a series of mound and hollow features to act as micro sediment traps
- When track-walking topsoil material, take care not to over compact it so that the soil structure is not destroyed for plant and seed germination.



Figure 39: Surface roughening of a slope. Note the hollows acting as "micro" sediment traps

E2.7.2 Construction, operation and maintenance

Construction and operation

For construction of surface roughening:

- Intercept up-slope runoff water and divert it away from the area(s) to be roughened
- Fill existing rills before roughening or track walking a batter face
- Undertake roughening up and down the face, so it leaves a cleat mark across the contour
- For track-walking, make well-defined cleat impressions in the soil, parallel to the contour or perpendicular to the slope (refer Figure 40)
- When track-walking topsoil material, take care not to over compact it.

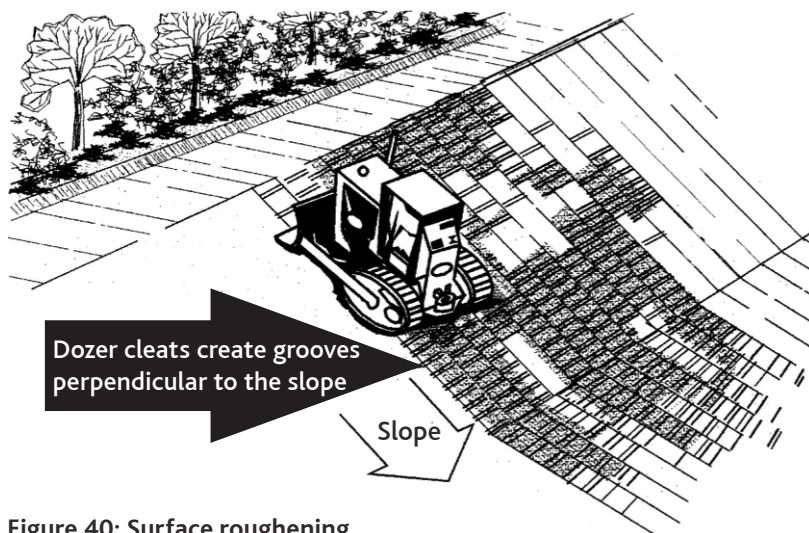


Figure 40: Surface roughening

Maintenance

To maintain surface roughening:

- Periodically check the slopes for signs of erosion (rills and channels)
- Rework and/or reseed the area as necessary.

E2.7.3 Decommissioning

There is no formal process for decommissioning surface roughening.

E3.0 Soil and surface stabilisation practices

A stabilised site is one that is resistant to erosion. Stabilisation is defined as the application of measures, such as vegetative or structural practices, that will protect exposed soil and prevent erosion. This section focuses on temporary stabilisation for ESC purposes. Wider and more permanent geotechnical stabilisation may also need to be considered.



Figure 41: Stabilisation via a combination of chip mulch, geotextile and aggregate

Common stabilisation measures include spreading of aggregate, grassing (with a full cover of grass), applying mulch/compost and the use of geotextiles (refer Figure 41).

Stabilisation techniques can be used as either a temporary or permanent measure against erosion. Some measures can be used for instant stabilisation (e.g. geotextiles, aggregate, mulch), whereas other measures (e.g. grassing) take longer before the area is appropriately protected against erosion.

In relation to geotextiles, there are many and varied types and products. These range from products that physically shed water, to those that incorporate seed and mulch and support vegetation, while protecting bare soil against erosion.

Where vegetation is used, the surface is considered stabilised once an 80% vegetative cover has been established over the entire revegetated area. Vegetation is effective in reducing runoff and can minimise the erosion potential of a construction site and reduce the need for structural practices. It is therefore important to retain as much of the existing vegetation as possible by limiting the extent of works.

Details of measures used for stabilisation purposes are set out below in sections E3.1 to E3.5. They comprise: topsoil and grassing, hydroseeding, mulching, turfing, and the use of geotextiles. A section on dust control measures is also provided in Section G9.0. Guidance for each control/measure is split into the following subsections:

- Design
- Construction, operation and maintenance.

E3.1 Topsoiling and grass seeding

E3.1.1 Design

Definition

Seeding involves the planting and establishment of quick growing and/or perennial grass to provide temporary and/or permanent stabilisation on exposed areas (refer Figure 42). The practice is usually undertaken in conjunction with the placement of topsoil.

Purpose

The purpose of the practice is to provide either a short-term or long-term cover for erosion control on disturbed areas. Vegetation protects exposed soils from raindrop impact, reduces runoff velocity and volume and binds soil particles together.

Rapid-growing annual grass will provide a short-term cover. It is primarily used where project works are still progressing but need temporary coverage (e.g. during winter shutdown period).

The use of perennial grasses will provide permanent erosion protection to disturbed areas following completion of the earthworks activity. Ideally, permanent grassing should be undertaken progressively throughout the project as areas are finalised and brought to final grade.

Topsoiling provides a suitable soil medium for vegetative growth for erosion control while providing some protection of the subsoil layer and also increasing the absorption capacity of the soil.



Figure 42: Grass stabilised earthworks site. Batter and building platforms

Conditions where practice applies

The practice applies to any site where vegetation establishment is important for stabilisation or landscape purposes.

Temporary and permanent seeding

- Use this on short to medium-term stockpiles, the outside of pond embankments or diversion bunds, on cut and fill slopes, access/haul road embankments and any other disturbed areas.
- Used to establish vegetation and to protect bare earth. It may also be used on rough graded areas that will not be disturbed again for 12 months or more.
- The main difference between temporary and permanent seeding is that permanent seeding is undertaken on completed sections of work. Additional differences are the seed type used and the quality of surface preparation undertaken prior to seeding.

Topsoiling

- Topsoiling is not a stabilisation measure itself. It needs to be used in conjunction with temporary or permanent seeding. Topsoil provides growth media for root development and biological activities. It also has greater available water-holding capacity than clay subsoil layers
- Topsoiling is recommended for sites where:
 - The texture and/or the organic component of the exposed subsoil or parent material cannot produce adequate vegetative growth
 - The soil material is so shallow that the rooting zone is not deep enough to support plants or furnish continuing supplies of moisture and plant nutrients
 - High quality vegetative cover is required to be established.

Limitations

Top soiling and grass seeding have the following limitations:

- Establishing a protective vegetative sward (expanse of grass) is difficult during periods of low rainfall or during temperature extremes. Construction sequencing should be developed to undertake topsoiling and seeding during optimum periods for vegetation establishment
- Seeds can wash away if not harrowed or held in place by mulch or hydroseed
- Grass seed that has not struck (refer Figures 43 and 44) can be mobilised by intense rainfall and may require several applications to achieve the appropriate stabilisation standard
- Topsoil alone is not considered stabilised and other erosion/ sediment control measures should be operational until there is an appropriate density of grass strike (minimum 80% cover, refer Figure 45). Alternatively other stabilisation methods (e.g. mulching) may be used
- Achieving a protective vegetative sward will take a certain period of time depending on a number of factors including soil types, seed types and weather conditions. This establishment period needs to be considered in erosion and sediment control planning (generally 4-8 weeks).



Figure 43: Initial grass strike - not stabilised

Key design criteria

Seedbed preparation

- If the site has contaminated material, this should be fully removed from the topsoil.
- Topsoil should be applied at a minimum depth of 100 mm to allow for a loose and friable surface.

Soil amendments

- Apply fertiliser at the rate outlined in Table 9 of these guidelines. Check with your fertiliser supplier before using.
- For large sites or unusual soil conditions, soil testing may be required, as some soils require the addition of lime to improve pH and/or trace elements for grass growth.

Seed application

- Seed mixes will vary and a seeding contractor should be consulted with before purchasing seed. Typical seed mixtures are detailed in Table 9.
- Apply seed uniformly across the site. If hydroseeding is required, refer to Section E3.2. Traditional agricultural techniques such as drill seeding, broadcast seeding, or no tillage are appropriate for establishing grass on areas flatter than 25%. Ensure the methodology achieves a good seed-to-soil contact, thereby enhancing seed survival and germination rates.
- For small areas, hand-broadcasting and raking may also be used to apply seed and fertiliser.
- Use only fresh, certified seed with a high purity and germination percentage from reputable suppliers that are preferably local. Species selection must consider the project's ecological context. If permanent seeding is required, be mindful of the final landscape plans.
- Apply establishment and maintenance fertiliser at the rate outlined in Table 9.
- If irrigation is required, deliver a volume at least equal to the evapotranspiration rate and continue until natural rainfall provides the necessary soil moisture levels for plant survival.
- Ensure that the site conditions and time of the year are appropriate for germination and vegetation establishment, prior to undertaking this activity. This may involve the placement of mulch and/or irrigation.



Figure 44: Approximately 40-60% grass strike - not stabilised

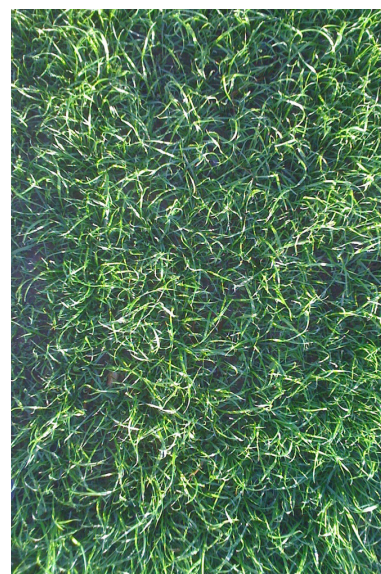


Figure 45: Approximately 90-100% grass strike - stabilised

- In order to maximise germination and growth rates, the preferred seeding windows for both temporary and permanent grassing are autumn and spring. With the use of mulch or geotextiles to maintain soil temperatures, or irrigation to supply moisture, grassing may be done throughout the year.
- Mulching, as outlined in Section E3.4, should be undertaken in conjunction with the seeding programme during dry or cold periods. This will protect both the seed and the soil, whilst also providing a better microclimate for the germination and growth of grass.
- A minimum 80% ground cover over the entire subject area is considered a stabilised surface. The above photos provide examples of various grass strike densities.

Table 9: Typical seed and fertiliser application rates

	Typical seed mix	Application rate
Temporary seeding	Annual Ryegrass	100-250 kg/ha
Permanent seeding	Perennial Ryegrass – 70% Fescues/Cocksfoot – 20% Clover/Lotus – 5% Browntop – 5%	200-400 kg/ha
Fertiliser application	N:P:K (15:10:10)	200-800 kg/ha
Maintenance fertiliser	N:P:K (15:10:10) and Urea	As required

Note: In all circumstances ensure that the seed and fertiliser application rates and mix is appropriate for your site. Always discuss with your seed and fertiliser supplier prior to utilisation.

E3.1.2 Construction, operation and maintenance

Construction and operation

It is important to prepare a good seedbed to ensure the success of establishing vegetation. The seedbed should be loose, uniform and free of large clods and other objectionable material. The soil surface should not be compacted or crusted.

Topsoil is a valuable resource. When placing topsoil in stockpiles, ensure that it is isolated by the up-slope diversion of clean water runoff, is stabilised appropriately, and is not stored in stockpiles greater than 3 m in height to maintain soil structure and integrity.



Figure 46: Loss of topsoil and grass seed after heavy rain event. Will require stabilisation and reapplication

Maintenance

- Check the condition of the topsoil on a regular basis and re-grade and/or replace where necessary. Always maintain the 100 mm minimum depth of topsoil and appropriate surface roughening.
- Heavy rainfall can wash new seeding away before full establishment of the grass (refer Figure 46). This is particularly evident on smoother hard surfaces, steep slopes and overland flow paths. Where vegetation establishment is unsatisfactory, the area will require a reapplication of seed or consideration will need to be given to other stabilisation techniques.
- Apply additional fertiliser dosing at the ratio of 15:10:10 (N:P:K) approximately 6 to 12 weeks after seeding, or as required.
- Protect all re-vegetated areas from construction traffic and other activities such as the installation of drainage lines and utility services. If required, erect temporary barrier fencing and/or signage to restrict uncontrolled movement of equipment and vehicles onto grassed areas.

E3.2 Hydroseeding

E3.2.1 Design

Definition

Hydroseeding is the application of seed, fertiliser and paper or wood pulp with water in the form of a slurry, which is sprayed over an area to provide for re-vegetation.

Purpose

The purpose of hydroseeding is to:

1. Establish grass and other vegetation on steep and/or inaccessible areas
2. Establish grass and other vegetation on surfaces with no or minimal topsoil.

The technique is designed to quickly establish vegetation. Hydroseeding is not considered instant stabilisation; although the practice will provide limited protection from raindrop impact for a short time until the grass is established.

Conditions where practice applies

This practice applies to any site where vegetation establishment is important for stabilisation or landscape purposes. Typically it is used on:

- Critical areas such as steep slopes or batters and exposed areas near watercourses that require a more rapid germination and stabilisation than conventional hand seeding
- Areas that may be difficult to establish by conventional sowing methods (e.g. steep embankments and areas with difficult access)
- Around or on runoff diversion channels/bunds, where rapid establishment of a protective vegetation cover is required before introducing water flow.



Figure 47: Specialist application of hydroseed

Limitations

Hydroseeding has the following limitations:

- Hydroseeding requires specialised equipment to apply (refer Figure 47). As a result, there is a reliance on experienced contractors and local knowledge to ensure that the seed mix is appropriate for the site and conditions
- In the period during the winter stabilisation programme, the availability of hydroseeding contractors may be an issue. It is recommended that you plan your programme and confirm these contractors well ahead of time
- The newly established hydroseed can be mobilised by intense rainfall
- Until the vegetation has established, a hydroseeded area is not considered a stabilised surface (refer Figures 48 to 50)
- Hydroseeding does not negate the need to water grassed areas. This watering needs to be carefully undertaken to avoid washing away the hydroseed.



Figure 48: Sportsfield being hydroseeded. Sediment control remains installed until an 80% grass strike has established

Key design criteria

There are various hydroseed mixes that use soil ameliorants (substances that aid plant growth), paper or wood pulp. In some circumstances, a binder is used to help seeds adhere to the soil surface. Hydroseed mixes will vary greatly depending on the site-specific conditions and the outcome required. Consultation with a hydroseeding contractor will be required to determine the seed mixes and application rates to achieve the required outcomes.

Where hydro seeding is used as an erosion control measure, the area of coverage is not considered stabilised until an 80% density of grass cover has been established.

E3.2.2 Construction, operation and maintenance

Construction and operation

Consult with a hydroseeding contractor to ensure correct application.

Maintenance

- Heavy rainfall can wash new hydroseeding away before vegetation is fully established. This is particularly evident on smoother hard surfaces and overland flow paths. Where vegetation establishment is unsatisfactory, the area will require a reapplication of hydroseed, or consideration will need to be given to other stabilisation techniques
- Apply additional fertiliser dosing at the ratio of 15:10:10 (N:P:K) approximately 6 to 12 weeks after initial hydroseeding or as required
- Water hydroseeded areas as necessary to promote growth, taking care to avoid washing the hydroseed away
- Protect all re-vegetated areas from construction traffic and other activities such as the installation of drainage and utility services.



Figure 49: Recently applied hydroseed on a stormwater wetland



Figure 50: Same wetland one week later, grass starting to take well

E3.3 Turfing

E3.3.1 Design

Definition

Turfing is the establishment and permanent stabilisation of disturbed areas by laying a continuous cover of grass turf (refer Figures 51 to 52).

Purpose

The purpose of the practice is to:

- Provide rapid stabilisation by the placement of vegetative cover to stabilise exposed areas
- Establish a vegetative filter or buffer along footpaths, driveways, kerbs, swales and channels.
The practice provides instant results from a visual and erosion control perspective.

Conditions where practice applies

This practice is typically only used for:

- Critical erosion prone areas on the site that cannot be stabilised by conventional sowing or other stabilisation methods
- Runoff diversion channels and other areas of concentrated flow where velocities will not exceed the specifications for a grass lining
- Areas around grass stormwater inlets, swales, embankments, road berms and other areas that require immediate grass cover for landscaping purposes.

Limitations

Turfing can be a relatively expensive option to achieve a stabilised surface. However, it has the dual advantage of providing erosion control and landscaping of a feature.



Figure 51: Turf being placed adjacent to a stabilised swale

Key design criteria

There are no specific design criteria for turfing; however the following principles should be applied.

Care needs to be taken to ensure that flow velocities travelling over the turfed area will not cause erosion or undercut the turf. In these circumstances, which often relate to steeper areas, turf reinforced with geotextiles should be considered. Refer to manufacturers specifications for flow velocities applicable for the various geotextiles.

Additionally, the type of turf utilised needs to be suitable to the ground conditions and final use.



Figure 52: Turf used to provide instant stabilisation of the swale allowing for the early commissioning of the device

E3.3.2 Construction, operation and maintenance

Construction and operation

It is important to prepare a good base to ensure the success of turf. The base should be loose, uniform and free of large clods and other objectionable material. If turfing is placed during periods of high temperature, it must be irrigated immediately prior. Lay turf on the contour; never up and down the slope. Start at the bottom and work up slope. Butt joints tightly and do not stretch or overlap.

For slopes steeper than 3:1, secure turf to ground with pegs or other means. Roll and tamp turf immediately to ensure solid contact with ground.

Maintenance

For maintenance of turfing:

- Water daily during the first week of laying the turf, unless there is adequate rainfall. Continue watering as appropriate to maintain good growth until fully established
- Check to ensure that the turf is firmly rooted to the original ground surface. Do not mow the area until the turf is firmly rooted
- Apply fertiliser as required in accordance with supplier's specifications.

E3.4 Mulching

E3.4.1 Design

Definition

Mulching is the application of a protective layer of straw or other suitable material to the soil surface (refer Figures 53 to 55).



Figure 53: Specialist application of hay mulch

Purpose

Primarily, mulching is used as a rapid stabilisation technique to protect the soil surface from the forces of raindrop impact.

Mulch also helps to conserve moisture, retain warmth, reduce runoff and erosion, prevent soil crusting and promote the establishment of desired vegetation.

Mulching for erosion control purposes is usually a short to medium-term treatment. It can be used as a stand-alone surface cover or in conjunction with a seed and fertiliser grassing programme.

Although straw (wheat or barley) and hay are the commonly used materials, mulching can also include the application of bark, wood residue and wood pulp spread over the surface of disturbed ground.

Conditions where practice applies

Mulching can be used anytime where protection of the soil surface is desired; although the following conditions are applicable:

- Where it is critical to achieve an immediate stabilised surface cover and to maintain this cover for the short to medium term (3 – 5 months). This includes stabilisation of areas that have not been worked for a period of time, but are proposed to be worked in the future
- Where a warmer microclimate is required to maintain soil temperatures, and soil temperature fluctuations need to be avoided. In turn this provides appropriate conditions for seed germination and establishment of vegetation at most times of the year.

Limitations

The following limitations apply to mulching:

- Mulching requires specialised equipment for large areas to enable uniform coverage. Hand mulching can occur on smaller areas
- Both hay and straw mulch have limited periods of effectiveness. In general, hay will last for 3 months and straw mulch up to 5 months before these materials become part of the soil matrix and effective cover is lost
- Mulching may introduce weed species. In some circumstances it may not be an appropriate measure for the site. Care needs to be taken to ensure that weed infestation of the mulched area does not create a future issue
- In the period during the winter stabilisation programme, the availability of mulching contractors may be an issue. It is recommended that you plan your mulching programme and confirm mulching contractors well ahead of time
- Hay or straw mulch can be dislodged by intense rainfall or very high winds
- Mulch is not an appropriate cover in areas of concentrated flow paths or in stream channel systems. Care is needed to ensure the mulch does not block flocculant treatment devices or interrupt the operation of decants in ponds
- The application of hay or straw mulch by blowing may not be practical next to motorways or other high traffic areas and adjoining residential areas. The potential limitations of this application should be considered in overall erosion and sediment control planning.



Figure 54: Hydromulch application



Figure 55: Hydrohay as applied

Key design criteria

Rates for the application of mulch materials will vary. Consultation with mulching contractors will be required.

To be regarded as a stabilised area, the mulch product must provide a complete cover of the area. The typical rates of application generally expected are as follows:

- Straw or hay mulch must be unrotted material and applied at a rate that provides a completed cover of the soil surface. This is typically in the order of 4,000- 6,000 kg/ha. Mulch material should be relatively free of weeds and not contain noxious weed species. A list of noxious weeds can be obtained from Auckland Council
- Hydromulch applications must contain a minimum of 80% virgin or recycled wood and be applied in accordance with the manufacturer's specifications. The application rate will range from 2,200 - 2,800 kg/ha depending on the slope gradient. The coverage should not exceed slope lengths greater than 150 m
- Wood chip (refer Figure 56) can be applied at rates of around 10,000 - 13,000 kg/ha. Bark mulch is generally slow to deteriorate but can affect soil nitrogen levels, making it unavailable to plants. It can also result in leaching of saps and tannins, causing a change in pH. Care needs to be taken, therefore, when applying wood chip adjacent to watercourses and on steeper slopes
- If site conditions result in difficulties with the mulch material remaining on site (e.g. during windy conditions), the mulch will need to be anchored. Forms of anchoring comprise:
 - Crimping: Using a tractor drawn implement designed to punch and anchor mulch into the top 50 mm of the soil profile. On sloping land, crimping should be done on the contour whenever possible. (**Note:** Standard agricultural disks used for soil drying are not suitable for crimping; nor is crimping suitable on soft soils)
 - Binders or tackifiers: These can be applied directly as the mulch is distributed, at an application rate that matches the manufacturer's specifications for that specific binder.



Figure 56: Woodchip to stabilise the finished batter slope

E3.4.2 Construction, operation and maintenance

Construction and operation

Stockpiles of woodchip need to be carefully managed to reduce the risk of spontaneous combustion. Turn stockpiles over periodically to reduce the risk of heating occurring. In addition, the discharge of tannins from the decomposition of woodchip should be addressed, as this can affect water quality.

Woodchip should be carefully managed around watercourses to avoid potential discharge.

Maintenance

Inspect mulch after each rainfall event or periods of excessively strong winds, replace any areas of damaged cover.

Construction equipment can disturb the stabilised areas. This may require the erection of temporary barrier fencing and/or signage to restrict movement of equipment and vehicles onto mulched areas.

To be regarded as stabilised, 100% surface cover must be maintained and a reapplication will be required when the integrity and/or surface density has declined.

E3.5 Geotextiles and erosion control blankets

E3.5.1 Design

Definition

This practice involves the placement of geotextiles, mats, plastic covers or erosion control blankets to stabilise disturbed soil areas and protect soils from erosion by wind or water (refer Figures 57 to 59). In this context, geotextiles are permeable fabrics which, when used in association with soil, have the ability to stabilise and protect.



Figure 57: Geotextile used to temporarily stabilise the batter face

Purpose

The purpose of the practice is to instantly reduce the erosion potential of the disturbed areas and/or reduce or eliminate erosion on critical sites.

The practice may be used as a permanent or temporary measure to control erosion.

Conditions where practice applies

These measures are used when disturbed soils may be particularly difficult to stabilise, including the following situations:

- In critical erosion-prone areas such as sediment retention pond outlets and inlet points
- In channels (both perennial and ephemeral) where the design flow produces tractive shear forces greater than what existing soils can withstand, which leads to erosion of the soil surface
- In areas on a temporary basis where there is inadequate space to install sediment controls
- In areas that may be slow to establish an adequate permanent vegetative cover (In this situation, the geotextile provides an early protective layer and assists in maintaining a higher soil temperature.)
- On short steep slopes, on batters, or stockpiles during periods of inactivity on the site
- In situations where tensile and shear strength characteristics of conventional mulches limit their effectiveness, such as high runoff velocities and overland flow paths
- In areas where the downstream environment is of high value and rapid stabilisation is required.

Limitations

The practice has the following limitations:

- Blankets and mats are generally not suitable for excessively rocky sites
- If used in areas where the final vegetation will be mowed, the product must be 100% biodegradable, including the pins, to prevent issues with mowing in the future
- Temporary blankets and mats must be removed and disposed of prior to application of permanent soil stabilisation measures
- Geotextiles do not generally provide the same level of benefit to soil quality as many of the traditional mulches like straw mulch. Most geotextiles have a limited working life of generally no more than 9 to 12 months, and some materials may be prone to UV degradation
- Some geotextiles may contain a fine synthetic mesh or netting that can pose a threat to an aquatic species when used for stream channel and bank stabilisation
- The use of plastic should be limited to covering stockpiles, or very small graded areas for short periods of time, until alternative measures such as seeding and mulching are installed
- Geotextiles, mats, plastic covers and erosion control covers have maximum flow rate limitations; consult the manufacturer for proper selection
- Geotextiles can shift if installed incorrectly and need to be carefully placed with both pinning and wrapping to secure edging.

Key design criteria

The use of geotextile is typically categorised into temporary biodegradable geotextiles and permanent non-biodegradable geotextiles. The exception to this is plastic covers, which are a temporary, non-biodegradable measure for stockpile covering, as noted above.

Erosion control batter blankets are a specific group of proprietary rolled erosion control products, commonly made from biodegradable materials. They provide an instant, short to medium-term protective cover of the soil surface, shielding it from the erosive forces of wind, raindrop impact and sheet flows, until a vegetative cover can be established or an alternative stabilisation methodology is used.

In all circumstances, refer to the product information sheets supplied by the manufacturer, for specific construction specifications.

In general, the minimum requirements for the various measures are as follows:

Nonwoven geotextiles

Nonwoven geotextiles are used as a general temporary erosion control measure. They are useful for preventing raindrop erosion and scour from minor flows. Typical examples of their use include bund stabilisation, batter stabilisation, stockpile stabilisation, and low velocity channel stabilisation.

The main advantage of nonwoven geotextiles is their ability to cling to the exposed surface. Their main disadvantage is their relative low strength. Where a high strength geotextile is needed (for instance in high flows), a woven geotextile should be used (refer below).

Woven geotextiles

A woven geotextile is used in high flow situations such as channels and flumes. For these materials:

- Material should be a woven polypropylene fabric with minimum thickness of 0.4 mm; minimum width of 3,700 mm and minimum tensile strength of 0.67 kN in conformance with the requirements of ASTM Designation: D4632
- The permittivity of the fabric should be approximately 0.2 s-1 in conformance with the requirements of ASTM Designation: D4491
- The UV Resistance @ 500 Hrs should be not less than 70% in conformance with the requirements of ASTM Designation: D4355
- Correct use/installation of geotextiles is critical to achieving the desired outcome of erosion control
- Geotextiles should be secured in place with ground staples, pins or sandbags and keyed into the tops of slopes and edges to prevent infiltration of surface water under the geotextile
- Specifications for installation are outlined in Figures 58 and 59. Particular care is needed to overlap and pin geotextiles in place
- In all circumstances, pin geotextiles down on a 500 mm (min) grid. This is critical to ensure an appropriate number of contact points with the underlying soil. It will also prevent wind from lifting the geotextile from the slope it is protecting
- Ensure that pins are suitable for the geotextile and soil type.

Plastic covers

- Plastic covers are used where there is a need to prevent any water from penetrating into the material covered. For example, contaminated stockpiles, or stockpiles of material for reuse
- Plastic sheeting should have a minimum thickness of 0.25 mm. It should be keyed in at the top of the slope and firmly held in place with sandbags or other weights placed no more than 3 m apart
- Seams are typically taped or weighted down their entire length with at least a 300-600 mm overlap of all seams
- Edges should be embedded a minimum of 150 mm into the soil.



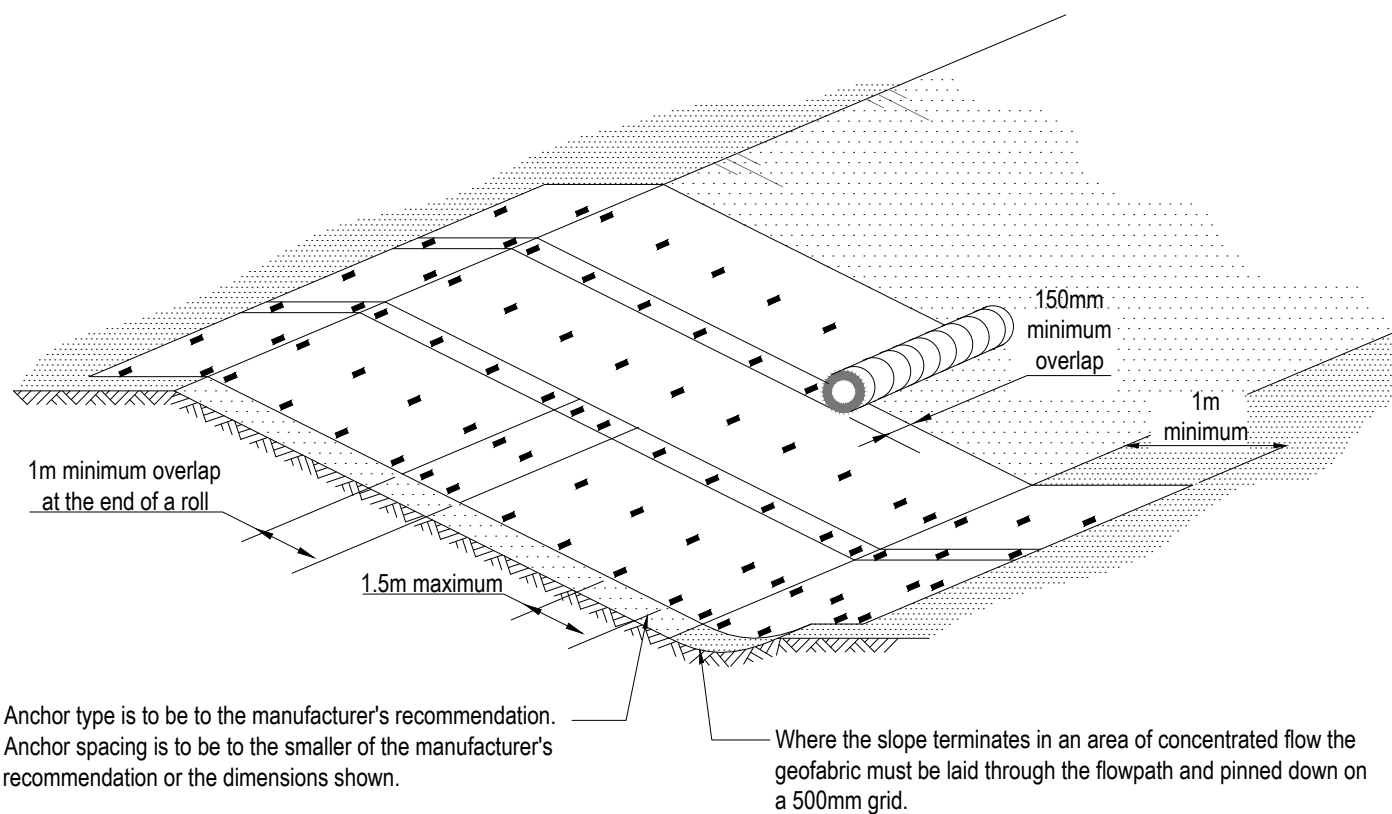


Figure 58: Geotextile design - outfalls

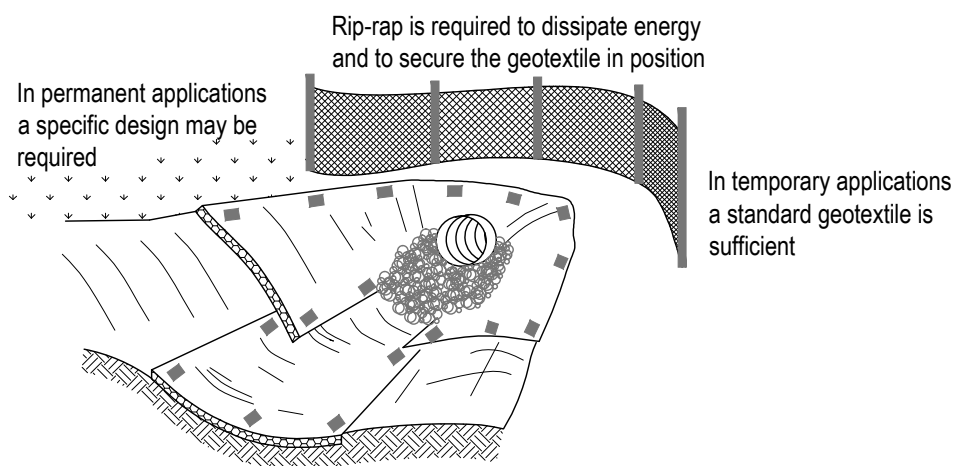





Figure 59: Geotextile design – on slopes

Erosion control blankets/mats


Key design criteria for erosion control blankets/mats are detailed in Table 10.

Table 10: Erosion control blankets/mats – design criteria

Material type	Material subtype	Design criteria
Biodegradable rolled erosion control products	All	<ul style="list-style-type: none"> • Biodegradable rolled erosion control products are used where vegetation growth is required. The product will provide stabilisation against raindrop erosion and low velocity flows until vegetation is established. • Biodegradable rolled erosion control products typically comprise jute fibres, curled wood fibres, straw, coconut fibre or a combination of these materials. • For a product to be considered 100% biodegradable, the netting, sewing or adhesive system that holds the biodegradable mulch fibres together must also be biodegradable. • The following examples meet the above requirements and should be selected based on site-specific conditions and manufacturers' recommendations.
	Jute  <p>Figure 60: Jute mesh</p>	<ul style="list-style-type: none"> • Jute (refer Figure 60) is a natural fibre that is made into a yarn, which is loosely woven into a biodegradable mesh. It is designed to be used in conjunction with vegetation with a life of approximately 1 year. • The material is supplied in rolled strips and needs to be secured to the soil with U-shaped staples or stakes in accordance with manufacturers' recommendations.
	Straw blanket  <p>Figure 61: Straw blanket</p>	<ul style="list-style-type: none"> • Straw blankets (refer Figure 61) should be machine-produced mats of straw with a lightweight biodegradable netting top layer. The straw should be attached to the netting with biodegradable thread or glue strips. The blanket should be of consistent thickness and the straw evenly distributed over the entire area of the blanket. • Straw blankets should be furnished in rolled strips a minimum of 2 m wide, 25 m long and 0.27 kilograms per square metre (kg/m²) <p>Staples should be U-shaped with 200 mm legs and a 50 mm crown.</p>

Material type	Material subtype	Design criteria
	Wood fibre blanket	<ul style="list-style-type: none"> Wood fibre blankets are composed of biodegradable fibre mulch with extruded biodegradable netting held together with adhesives. The material is designed to enhance revegetation. The material is furnished in rolled strips, which are secured to the ground with ground staples or pins in accordance with manufacturers' recommendations.
	Coconut fibre blanket	<ul style="list-style-type: none"> Coconut fibre blankets (refer Figure 62) should be machine-produced mats of 100% coconut fibre with biodegradable netting on the top and bottom. The coconut fibre should be attached to the netting with biodegradable thread or glue strips. The blanket should be of consistent thickness and the coconut fibre evenly distributed over the entire area of the blanket. Coconut fibre blankets should be secured in place with ground staples or pins in accordance with manufacturers' recommendations.  <p>Figure 62 shows a cross-section of a steep, eroded bank (batter) that has been stabilized using a coconut fibre blanket. The blanket is a light-colored, fibrous mat applied to the soil surface. A narrow, shallow channel of water flows down the face of the batter. The blanket appears to be holding in place, with some grass visible growing through it. In the background, there are trees and a residential area with houses and a fence.</p> <p>Figure 62: Coconut fibre blanket used to stabilise batters while allowing grass to grow through</p>
	Coconut fibre mesh	<ul style="list-style-type: none"> Coconut fibre mesh is a thin permeable membrane made from coconut or corn fibre that is spun into a yarn and woven into a biodegradable mat. It is designed to be used in conjunction with vegetation and typically has a lifespan of several years. The material is furnished in rolled strips which are secured to the soil with ground staples or pins in accordance with manufacturers' recommendations.

Material type	Material subtype	Design criteria
Non-biodegradable erosion control products	All	<ul style="list-style-type: none"> Non-biodegradable products are a permanent erosion control measure that may have a benefit in a temporary situation of extended duration, such as a temporary stream diversion that will be in place for longer than 12 months. Non-biodegradable materials typically comprise polypropylene, polyethylene, nylon or other synthetic fibres. In some cases, a combination of biodegradable and synthetic fibres is used to construct the material. Netting used to hold these fibres together is typically non-biodegradable as well.
	Plastic netting	<ul style="list-style-type: none"> Plastic netting is a lightweight biaxially-orientated netting designed for securing loose mulches like straw to soil surfaces to establish vegetation. The netting is supplied in rolled strips and is photodegradable. The netting should be secured with ground staples or pins in accordance with manufacturers' recommendations.
	Plastic mesh	<ul style="list-style-type: none"> Plastic mesh is an open-weave geotextile composed of an extruded synthetic fibre woven into a mesh with an opening size of less than 50 mm. It is used in combination with revegetation or to secure loose fibre such as straw to the ground. The netting is supplied in rolled strips and should be secured with ground staples or pins in accordance with manufacturers' recommendations.
	Synthetic fibre with netting	<ul style="list-style-type: none"> This comprises a mat of durable synthetic fibres treated to resist chemicals and UV light. The mat is a dense, three-dimensional mesh of synthetic fibres stitched between two polypropylene nets. The mats are designed to be revegetated and provide a permanent composite system of soil, roots and geomatrix. The netting is supplied in rolled strips and should be secured with ground staples or pins in accordance with manufacturers' recommendations.

Material type	Material subtype	Design criteria
	Bonded synthetic fibre	<ul style="list-style-type: none"> Bonded synthetic fibre mats consist of a three-dimensional geomatrix nylon (or other synthetic) matting. Typically they have more than 90% open area which facilitates root growth. The mat's tough root reinforcing system anchors vegetation and protects against hydraulic lift and shear forces created by high volume discharges. It can be installed over prepared soil followed by seeding into the mat (refer Figure 63). Once vegetated, it becomes an invisible composite system of soil, roots and geomatrix. The netting is supplied in rolled strips and should be secured with ground staples or pins in accordance with manufacturers' recommendations.  <p>Figure 63: Bonded synthetic fibre mat used as erosion protection and medium for revegetation</p>
Combination synthetic and biodegradable products	All	<ul style="list-style-type: none"> These consist of biodegradable fibres such as wood fibre or coconut fibre with a heavy polypropylene net stitched to the top and a high-strength continuous filament geomatrix or net stitched to the bottom. The material is designed to enhance revegetation. The material is supplied in rolled strips and should be secured with ground staples or pins in accordance with manufacturers' recommendations.

E3.5.2 Construction, operation and maintenance

Construction and operation

Site preparation

- Undertake proper site preparation to ensure complete contact of the blanket or matting with the soil.
- Grade and shape the area of installation.
- Remove all rocks, clods, vegetation or other obstructions so that the installed blankets or mats will have complete and direct contact with the soil.
- Prepare seedbed by loosening 50 mm to 75 mm of topsoil where seeding is proposed.

Seeding

- Seed the area before blanket installation for erosion control and revegetation.
- Seeding after mat installation is often specified for turf reinforcement application. When seeding prior to blanket installation, all check slots and other areas disturbed during installation must be re-seeded.

Anchoring

- Ground staples, or pins can be used to anchor mats and blankets to the ground surface.
- The selection of anchors will depend on a number of factors including whether the stabilisation is temporary or permanent (potentially requiring biodegradable pins) and soil conditions.
- The selection of anchors will also depend on whether the blanket or matting will be subject to significant flow forces.
- Ground staples and pins should be driven flush to the soil surface.
- All anchors should have sufficient ground penetration to resist pullout. Longer anchors may be required for loose soils.

Installation on slopes

- Installation should be in accordance with the manufacturers' recommendations. In general, these will be as follows:
 - Begin at the top of the slope and anchor the blanket in a 150 mm deep by 150 mm wide trench. Backfill trench and compact earth firmly
 - Unroll blanket down-slope in the direction of the water flow
 - Overlap the edges of adjacent parallel rolls by 50-75 mm and staple every 1 m
 - When blankets must be spliced, place blankets end over end (shingle style) with 150 mm overlap. Staple through overlapped area, approximately 300 mm apart
 - Lay blankets loosely and maintain direct contact with the soil. Do not stretch
 - Staple blankets sufficiently to anchor blanket and maintain contact with the soil. Staples should be placed down the centre and staggered with the staples placed along the edges.
- Follow the manufacturers' recommendation for the spacing of the staples; although the staple densities in Table 11 generally apply:

Table 11: Staple density

Slope	Minimum staple density
> 50%	2.0 staples/m ²
50% to 33%	1.5 staples/m ²
< 33%	1.0 staples/m ²

Installation in channels

Installation should be in accordance with the manufacturers' recommendations.

Maintenance

Areas treated with temporary soil stabilisation should be inspected daily and after each rainfall event. Areas treated with temporary soil stabilisation should be maintained to provide appropriate erosion control and reapplied or replaced on exposed soils when the area becomes exposed or exhibits visible erosion. The maintenance aspects to look for comprise:

- Lifting geotextile caused by vegetation growing up under the fabric
- Rilling caused by water flowing beneath the geotextile
- Torn geotextile, missing pins or other damage caused by high winds, machinery or vandalism.

Repair or replace any areas of geotextile damaged or dislodged in any way. If required, erect a temporary barrier and/or signage fencing to restrict uncontrolled movement of equipment and vehicles onto treated areas.



F

Sediment control practices

This section focuses on sediment control and describes structural and non-structural measures in accordance with the principles of ESC outlined in Section A2.0 of the guideline.

Along with erosion control measures, sediment retention devices are needed to capture runoff so mobilised sediment can settle out and be retained on site.

Guidance is provided below (sections F.1.1 to F.2.5) on the common measures to control sediment on earthworks sites. Guidance for each control/measure is split into the following subsections:

- Design
- Construction, operation and maintenance
- Decommissioning.

F1.0 Structural approaches

F1.1 Sediment retention ponds

F1.1.1 Design

Definition

A sediment retention pond (SRP) is a temporary pond formed by excavation into natural ground, or by the construction of an embankment. SRPs incorporate an outlet device to dewater the pond at a rate that allows a high percentage of suspended sediment to settle out within the pond.

Purpose

The purpose of an SRP is to detain runoff flows so that deposition of transported sediment can occur through settlement.

Due to the detention provided, SRPs also attenuate flows thereby reducing downstream channel erosion effects.

Conditions where practice applies

SRPs should be used:

- Where treatment of sediment-laden runoff is required
- Where concentrated flows of sediment-laden runoff occur.

They are typically the most appropriate control measure for catchments greater than 0.3 ha.

Limitations

Limitations of SRPs are:

- Specific geotechnical design input may be required
- Location needs to be considered in relation to ongoing maintenance (particularly during winter) and decommissioning at the completion of earthworks
- Specific design details may be required, including drawings, to ensure correct construction
- Catchment areas should be restricted to 5 ha. This limits the length of overland flowpaths, reduces maintenance, and limits the size of flocculant treatment devices.

Key design criteria

An SRP is an impoundment area formed by excavation or filling to form embankments. The embankments provide the required impoundment volume and shape. In practice, most SRPs are formed from a combination of excavation and filling. The maximum height of any filled embankment should not exceed 2.6 m. This height accommodates a maximum 2.0 m pond depth (base of pond to primary spillway), 300 mm freeboard from the primary spillway to the emergency spillway, and a further 300 mm depth of spillway. Exceeding this 2.6 m maximum height will increase the overall footprint of the SRP.

The following design criteria apply to SRPs (refer also Figures 64, 65, and 71 to 73):

Size

- Size SRPs based on the contributing catchment area and slope length.
- On earthwork sites with slopes less than 18% and less than 200 m in length, design SRPs with a minimum volume of 2% of the contributing catchment area (200 m³ for each ha of contributing catchment).
- On earthwork sites with slopes greater than 18% or greater than 200 m in length, design SRPs with a minimum volume of 3% of the contributing catchment area (300 m³ for each ha of contributing catchment).
- The above calculation defines the total storage volume, which is measured from the base of the pond to the top of the primary spillway.
- The slope angle is determined by the slope immediately (within 20 m) above the SRP, or by the average slope over the contributing catchment, whichever is greater. The slope angle should also be the greater of the pre- or post-construction slope.


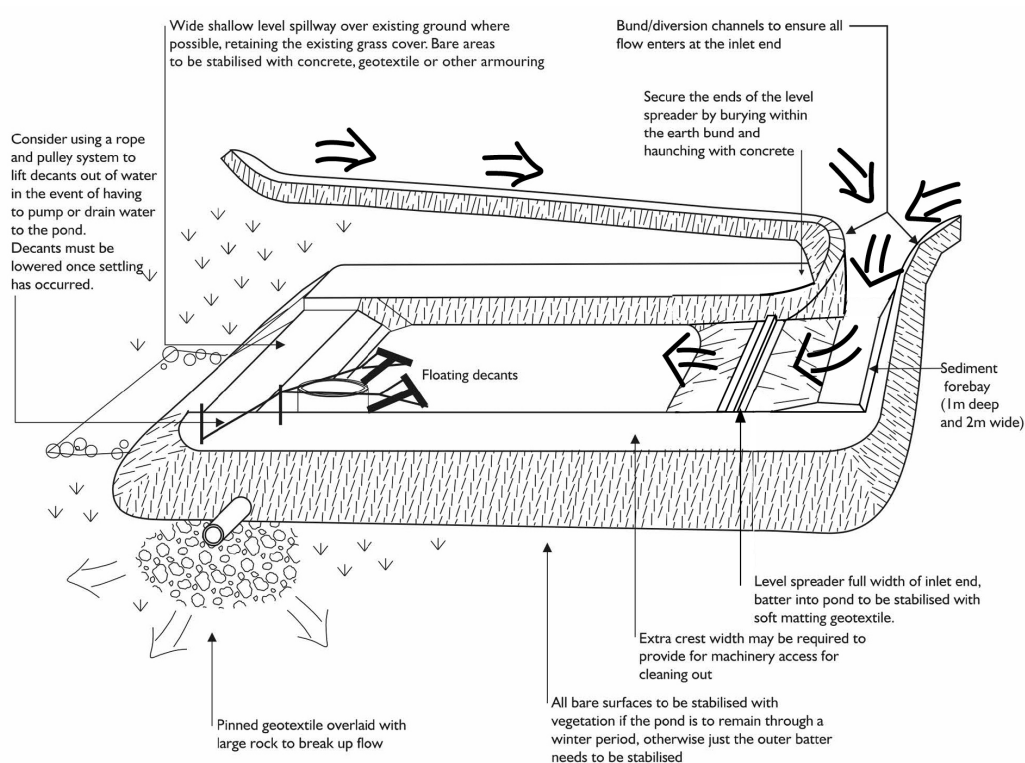


Figure 64: Schematic of a sediment retention pond

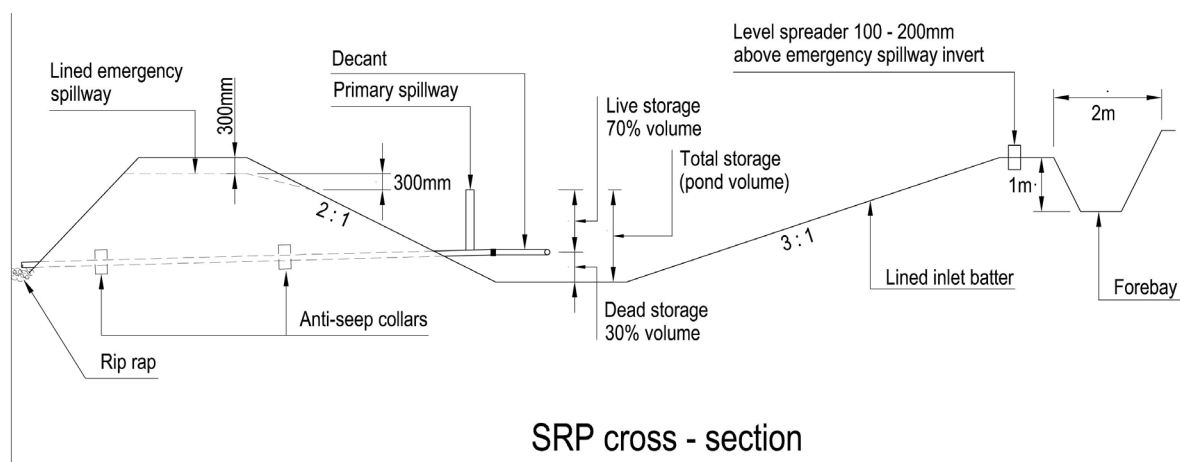

SRP cross - section

Figure 65: SRP cross-section

Shape

- Maximise the distance between the inlet and the outlet (including the emergency spillway) to reduce the risk of short circuiting and to promote quiescent (inactive) conditions. If this cannot be achieved by correctly positioning the inlet and outlets, install baffles to achieve the appropriate length to width ratio design.
- Ensure the length to width ratio of the SRP is no less than 3:1 and no greater than 5:1. The length of the SRP is measured as the distance between the inlet and the outlet (decant system).
- The length to width ratio is measured at the height of the primary spillway.
- Ensure the SRP has a level invert as described below to promote the even and gradual dissipation of the heavier inflow water across the full area of the SRP.
- The construction of the SRP invert with a reverse slope can aid maintenance by promoting heavier sediment to drop out and accumulate at the inlet end of the device.
- For external batter steepness refer Figures 72 to 74. For internal batters, a 2:1 ratio is recommended, subject to available space and ground conditions.

Depth

- SRP depths may be 1 – 2 m, but no deeper than 2 m. This depth is measured from the invert to the top of the primary spillway. Deeper ponds are more likely to cause short circuiting problems during larger storm events and require specifically designed floating decant systems.
- The decant design in this guideline operates through a maximum live storage range of 1.5 m.

Dead storage (permanent storage)

- Dead storage is the component of impoundment volume that does not decant and remains in the SRP. It is important for dissipating the energy of sediment-laden inflows.
- Dead storage should be retained at 30% of the total SRP storage by positioning the lowest decant 0.4 - 0.8 m above the invert of the SRP.
- The decant design detailed in this guideline allows the lower decant arm to be raised as sediment deposition increases, thereby maintaining the percentage volume of dead storage.

Live storage (decant storage)

- Live storage is the volume between the lowest decant outlet level and the crest of the SRP primary spillway.
- The live storage volume capacity should be 70% of the total SRP storage.
- The decant design detailed in this guideline allows the decant arms to be raised as sediment deposition increases, thereby maintaining the percentage volume of live storage.

Forebay

- The forebay should extend the full width of the pond, be a minimum of 1 m in depth, and be located upstream of the level spreader.

Decanting/outlet dewatering device

- The SRP decant/outlet dewatering device should be designed to remove water within the upper water column without removing any of the settled sediment, or any appreciable quantities of floating debris. Either a 100 mm or 150 mm diameter decant can be used.
- The floating T-bar dewatering device described in this guideline allows decanting of the cleaner surface water from the top of the water column.
- The recommended decant rate from an SRP is 3 litres/second/ha of contributing catchment. This rate ensures that appropriate detention times are achieved.
- A standard T-bar design is detailed in Figure 66. This standard T-bar decant design provides a decant flow rate of 4.5 litres/second. Decants are either added incrementally to accommodate catchments greater than 1.5 ha or the number of holes in the decant is restricted to maintain the decant rate of 3 litres/second/ha of contributing catchment.
- T-bars should be able to float to the top of the primary spillway at all times.
- To achieve a decant rate of 4.5 litres/second per decant, six rows of 10 mm diameter holes should be drilled at 60 mm spacings (200 holes) along the 2 m long decant arm.
- For catchments of less than 1.5 ha, the appropriate number of holes should be sealed off to achieve a 3 litres/second/hectare discharge rate.
- Single T-bar decants must be able to operate through the full live storage depth of the SRP.
- If two decant systems are required, the lower T-bar decant must operate through the full live storage depth of the SRP. The upper T-bar decant should operate through the upper 50% of the live storage depth of the SRP only.


- If three decant systems are used, then the lower T-bar decant should operate through the full live storage depth and the second T-bar decant through the upper two thirds of live storage depth of the SRP. The upper T-bar decant should operate through the upper one-third of live storage depth of the SRP as detailed in Figure 67.
- For contributing catchments:
 - Up to 1.5 ha, use a 150 mm (minimum) outlet pipe
 - Between 1.5ha and 3.0ha, use a 150 mm (minimum) outlet pipe
 - Between 3.0ha and 5.0ha, use a 300 mm (minimum) outlet pipe.

Primary spillway

- The primary spillway is the vertical upstand or riser pipe to which the decant is connected. All SRPs require a piped primary spillway.
- For contributing catchments:
 - Up to 1.5 ha, use a 150 mm (minimum) upstand as a primary spillway
 - Between 1.5 ha and 3.0ha, use a 150mm (minimum) upstand as a primary spillway
 - Between 3.0 and 5.0 ha, use a 1050mm concrete manhole riser as a primary spillway.
- The primary spillway should be a minimum 600 mm lower than the top of the SRP embankment and a minimum 300 mm lower than the emergency spillway crest. Ensure the riser and the discharge pipe connections are all completely watertight.

Emergency spillway

- An emergency spillway is essential for all SRPs.
- Emergency spillways must be capable of accommodating the 1% AEP event without eroding.
- The emergency spillway level should be a minimum 300 mm lower than the top of the SRP embankment.
- The emergency spillway crest and downstream batter require a very high standard of stabilisation with well-compacted fill material.
- When using geotextile for emergency spillway stabilisation purposes, the batter face must be smooth and all voids eliminated. If geotextile is used, a soft needle punch geotextile is covered with a strong woven low permeability geotextile. Ensure the geotextile is pinned at 0.5 m centres over the full area of the emergency spillway.
- Design the emergency spillway as a stabilised trapezoidal cross-section, with a minimum bottom width of 6 m, or the width of the pond floor, whichever is the greater; unless specific design calculations have confirmed a smaller emergency spillway will accommodate the 1% AEP event.

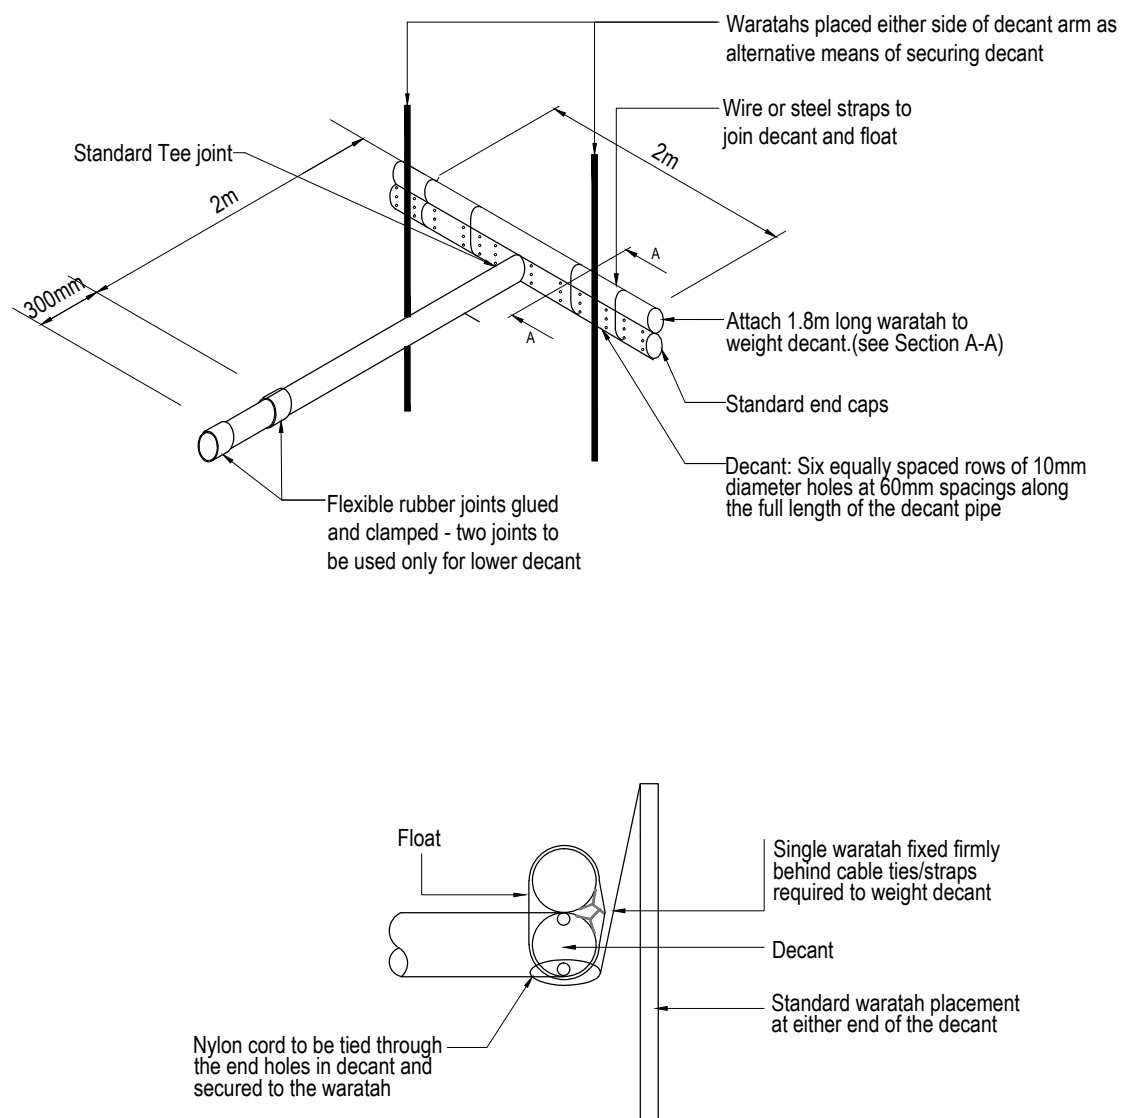

Section A-A

Figure 66: Schematic of standard T-bar design

Baffles

- Incorporate baffles (refer Figure 67) into the SRP design if the recommended pond shape cannot be achieved. Extend baffles the full depth of the SRP and place them to maximise dissipation of flow energy.
- Generally, baffles are in the form of a wing to direct inflows away from the outlet and maximise the stilling zone. A series of compartments within the pond can be used to achieve this, although care must be taken to avoid creating in-pond currents and re-suspension of fine sediment.



Figure 67: Example of baffles

Level spreader

- Incorporate a level spreader (refer Figures 68 and 69) into the inlet design to reduce inflow velocities and rapid dissipation of inflow energy. The inlet batter downstream of the level spreader must be well compacted and smoothed (no steeper than a 3:1 gradient), and stabilised over its entire area. It is essential to ensure the level spreader is level, non-erodible and spans the full width of the SRP.
- To ensure even inflows, install a trenched and pegged 150 mm x 50 mm timber weir or similar across the full width of the inlet. Secure the ends of the timber weir with compacted earth and a concrete haunch along the edges of the level spreader to provide added structural strength. This timber weir also serves to toe in any geotextile protection that may be required. Sediment accumulated upstream of the level spreader may require periodic removal.
- Position the top of the level spreader weir 100 – 200 mm above the invert of the emergency spillway.



Figure 68: Example of a level spreader

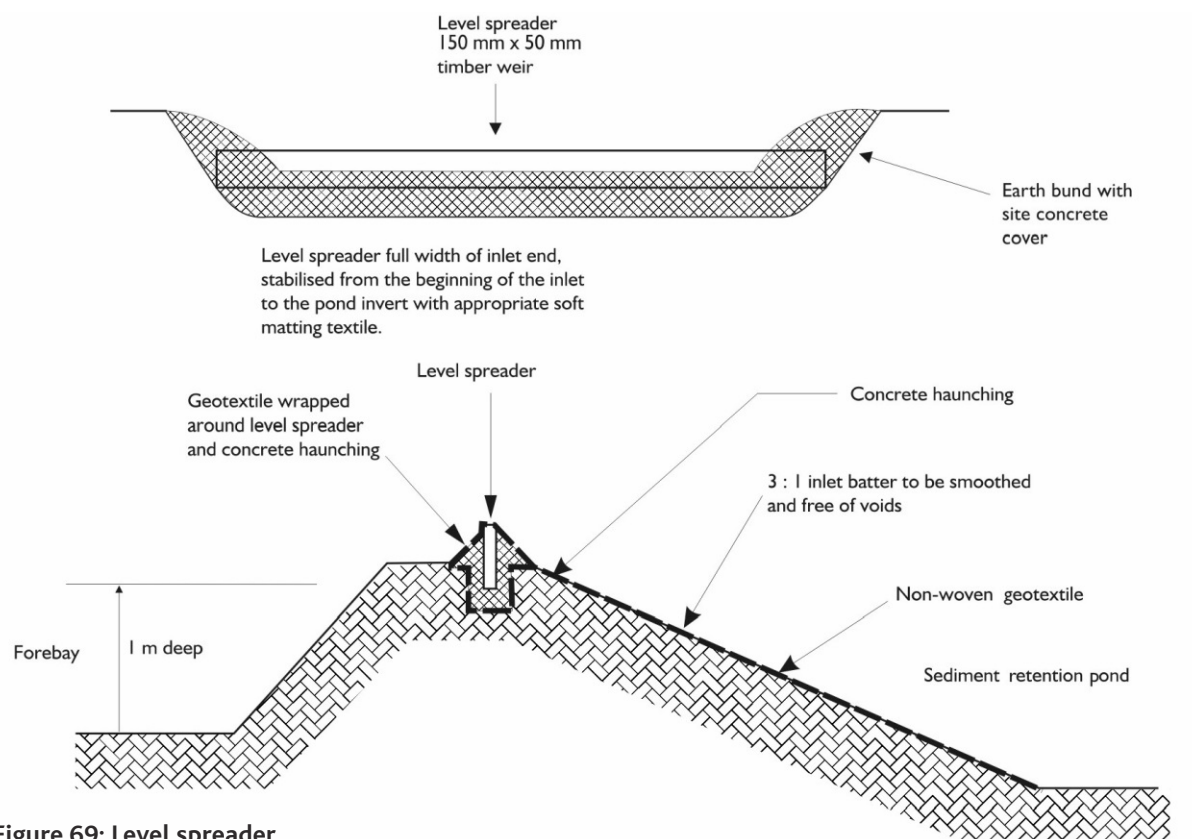


Figure 69: Level spreader

Anti-seep collar

- The discharge pipe should be laid at a 1 – 2% gradient and surrounded by compacted fill. Anti-seep collars (refer Figure 70) should be installed around the pipe with a spacing of approximately 10 m to increase the seepage length along the pipe. The vertical projection of each collar should be 500mm. All anti-seep collars and their connections around the pipe must be watertight. Figure 71 provides a schematic of the anti-seep collar. Site-specific constraints may preclude certain features of this design.



Figure 70: Example of an anti-seep collar




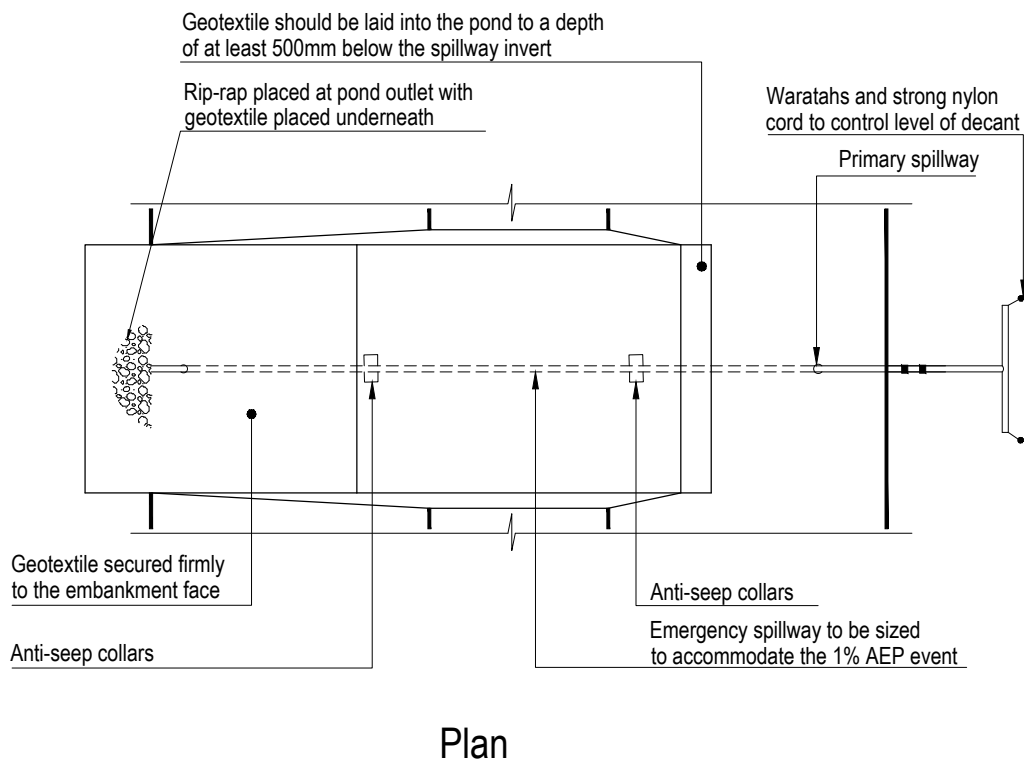


Figure 71: Sediment retention pond for <1.5 ha catchment

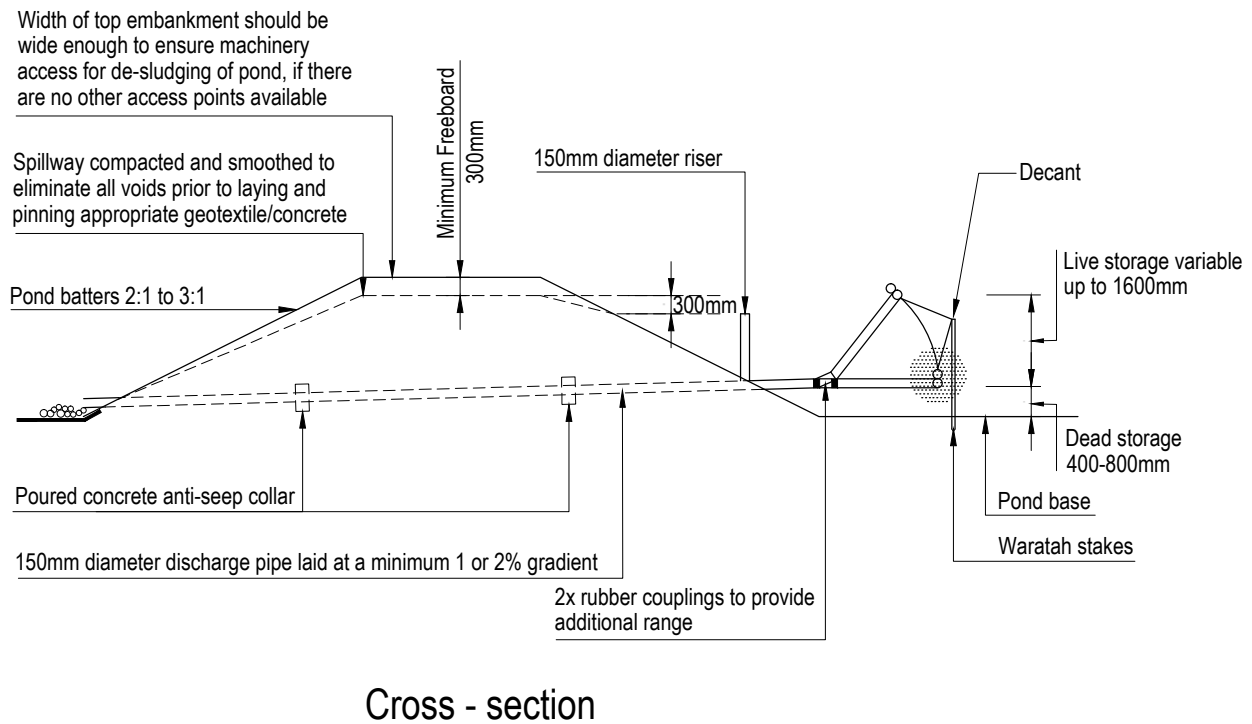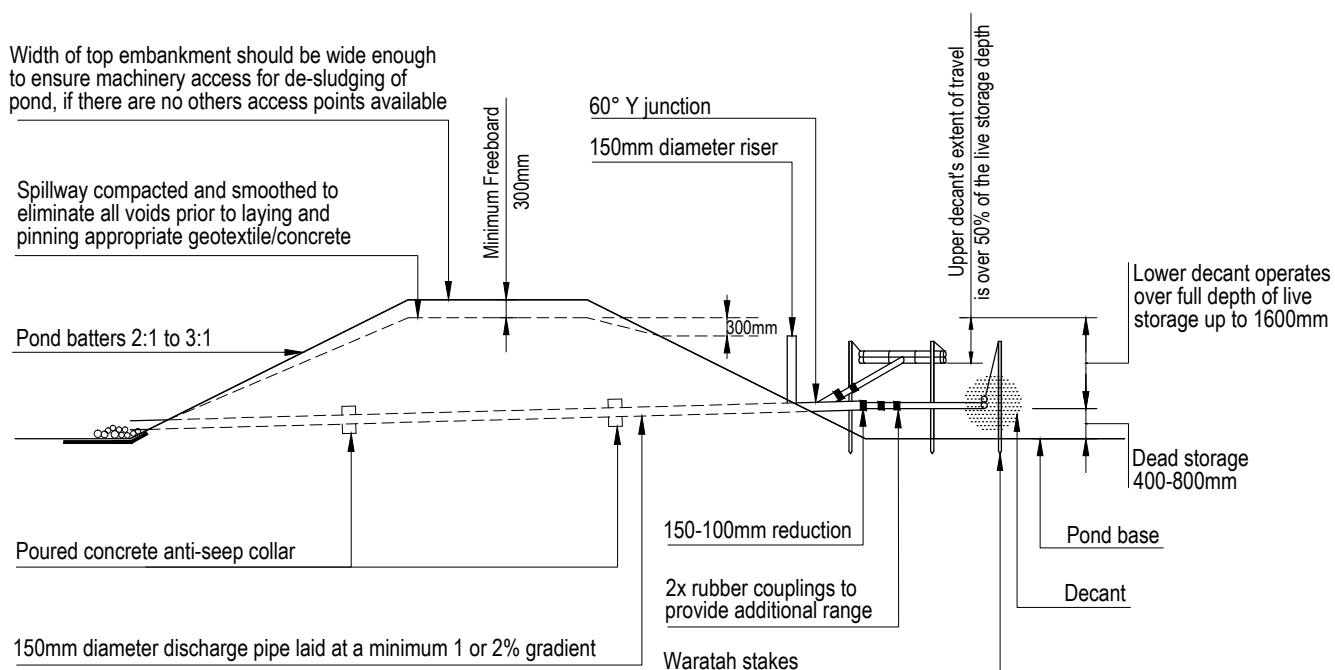

Cross - section

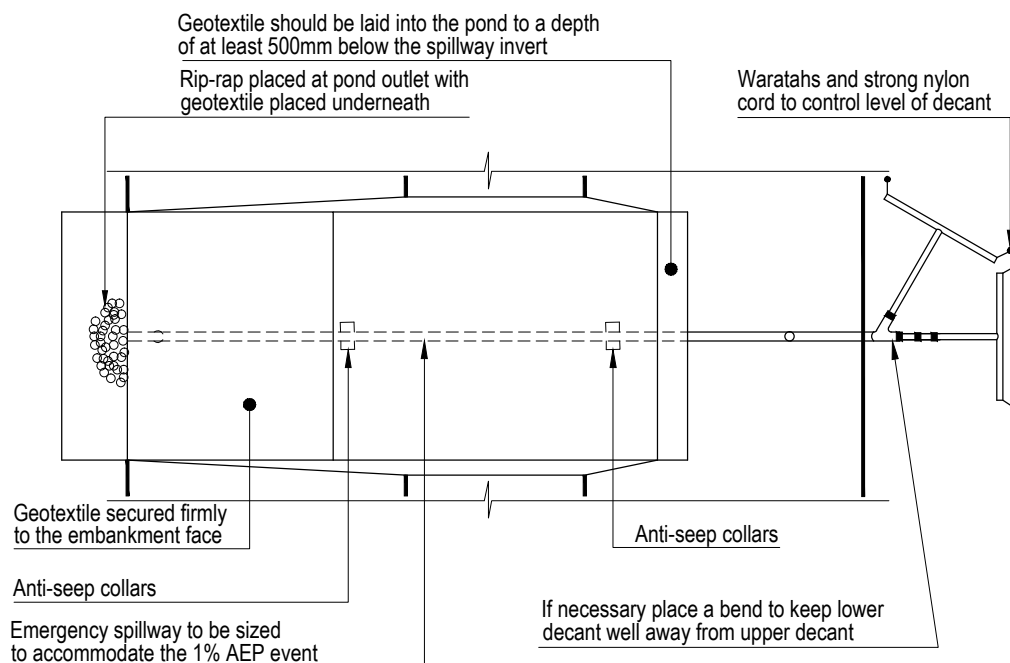

Plan

Figure 72: Sediment retention pond for 1.5 to 3 ha catchment

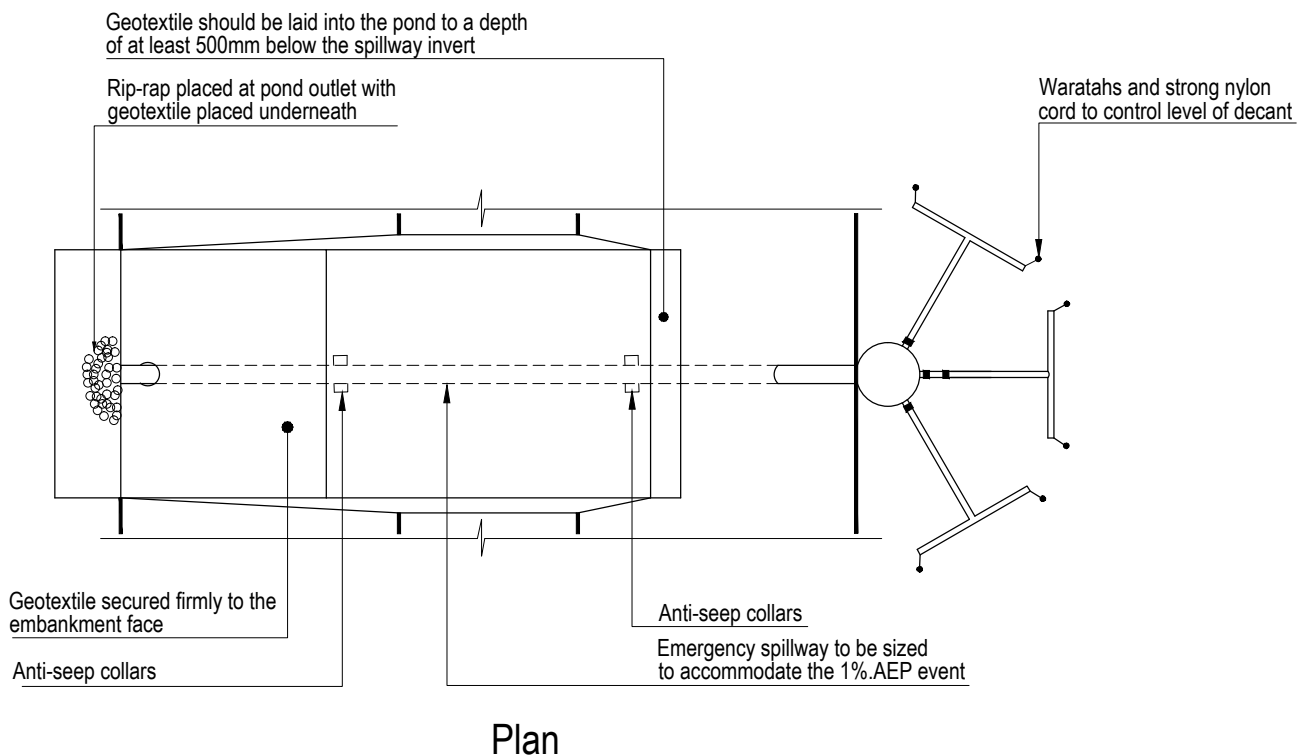
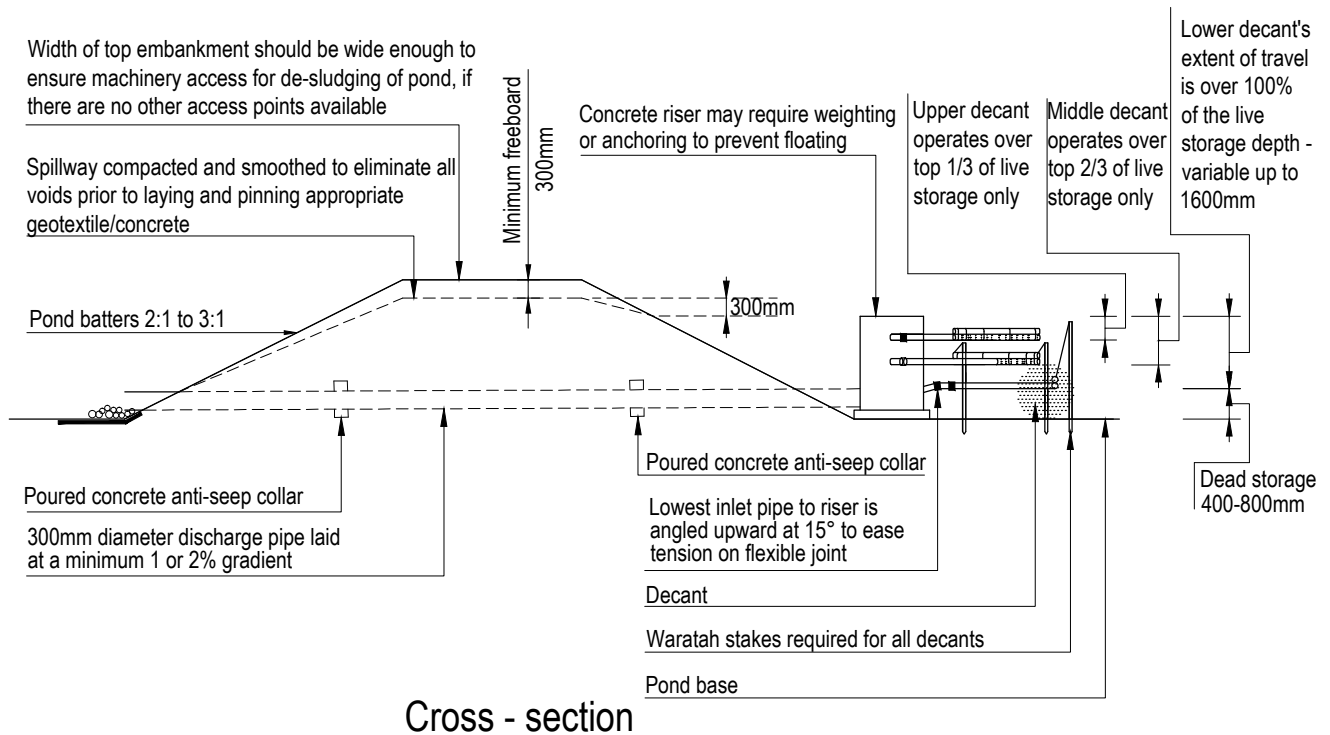


Figure 73: Sediment retention pond for 3 to 5 ha catchment

Safety

SRPs can be a safety hazard if not appropriately fenced and if safety rules are not followed. Low gradient pond batters provide an additional safety measure (for access/egress). Check the safety requirements of Worksafe NZ. Refer Section C1.8.2 for further discussion on safety considerations.

Flocculant treatment

The majority of SRPs will require flocculant treatment.

The details of various flocculant treatment options are provided in Section F6.0 and Auckland Council's Technical Publication TP227 - *The Use of Flocculants and Coagulants to Aid the Settlement of Suspended Sediment in Earthworks Runoff : Trials, Methodology and Design*, June 2004.

SRP potential modifications

The development of the SRP design promoted in this guideline has been supported by field trials that have confirmed the sediment retention efficiencies now adopted as the assumed minimum performance for the Auckland region. A number of additional measures and modifications have been developed and implemented by the earthworks industry since those original trials. The additional measures include:

- Baffles at dead water level (refer Figure 74 below)
- Geotextile stabilisation of the internal batters of the SRP
- Floating booms to reduce wave propagation and reduce maintenance to address blockage of T-bar holes by floating (organic) debris
- The use of additives other than PAC.

At the time of preparation of this guideline, the above measures had not been subject to any documented comparative testing to verify their benefit. However, they are generally supported by the industry as additional means to achieve or exceed the SRP efficiencies assumed by the guideline. Design specifications for these measures or modifications are not currently included in this guideline.



Figure 74: Example of baffles at dead water level

F1.1.2 Construction, operation and maintenance

Construction and operation

For constructing and/or operating SRPs, follow the following general steps:

- Form clean water diversion bunds to isolate the SRP construction area
- Install a silt fence or other appropriate sediment control below the SRP construction area
- Clear areas under proposed fills of topsoil or other unsuitable material
- Large fill embankments may need to be keyed in. Ensure that the embankments are constructed to appropriate engineering design standards
- Use only certified fill
- Place and compact fill in layers as per the engineering specifications
- Construct the base of the SRP with a reverse slope so heavier sediment drops out and accumulates at the inlet end of the device. This will assist with maintenance, specifically during regular desilting
- Do not place pervious materials such as sand or gravel within the fill material
- Construct fill embankments approximately 10% higher than the design height to allow for settlement of the material. Install appropriate pipe work and anti-seep collars during the construction of the embankment and compact around these appropriately (refer Figure 75). Where possible, install the discharge pipes through the embankment once the embankment fill height provides sufficient cover over the pipe to continue filling once the discharge pipe has been installed
- Install the emergency spillway with a minimum of 300 mm freeboard height above the primary spillway. Where possible, construct emergency spillways in well vegetated, undisturbed ground (not fill) and discharge over long grass. If the emergency spillway is to be constructed on bare soil, provide complete erosion protection by measures such as grouted rip-rap, asphalt, erosion matting/ geotextile or concrete. When using geotextile for emergency spillway stabilisation purposes, the batter face must be smooth and all voids eliminated. If geotextile is used, a soft needle punch geotextile is laid first and then covered with a strong woven low permeability geotextile. Ensure the geotextile is pinned at 0.5 m centres over the full area of the emergency spillway
- Install and stabilise the level spreader (refer Figure 76)
- Construct the forebay.



Figure 75: Installation of the outlet pipe and the anti-seep collars



Figure 76: Level spreader across the full width of the pond



Figure 77: Steel strapping used to attach decant system to horizontal pipework

- For the decant system:
 - Securely attach the decant system to the horizontal pipework with steel strapping directly on top of the decant arm (refer Figure 77). This should be weighted to keep the decant arm submerged just below the surface through all stages of the decant cycle. This will also minimise the potential for blockage of the decant holes by floating debris. The most successful method is to weigh the decant arm by strapping a 1.8 m long waratah between the float and the decant (approximately 4 kg of weight). Make all connections watertight
 - Position the T-bar decant at the correct height by tying 5 mm nylon cord through decant holes at either end of the decant arm and fastening it to waratahs driven in on either side of the decant. T-bars should be able to float to the top of the primary spillway at all times
 - Use a flexible thick rubber coupling to provide a connection between the decant arm and the primary spillway or discharge pipe. To provide sufficient flexibility (such as is required for the lower decant arm), two couplings should be installed. Fasten the flexible coupling using strap clamps and glue. Self-tapping screws will provide added strength and robustness to the joint. Steel bands should be tightened with a socket rather than screwdriver and care should be taken to leave space between the ends of the PVC pipes within the coupling to allow the T-bar to flex
 - Where a concrete riser decant system is used, ensure the lower decant connection is angled upwards so that it bisects the angle that the decant operates through. This will reduce the deformation force on the coupling used
 - Where a concrete riser is used, ensure it is incorporated within the pond embankment to prevent it floating. Where this is not possible, use a suitable volume of concrete ballast in the base of the manhole to prevent flotation
 - Decants should include a mechanism to allow outflows from the SRP to be temporarily stopped. This is to facilitate flocculant treatment via batch dosing and as a contingency in the event of spill or discharge of contaminants. It will allow contaminated runoff to be retained and prevent it from discharging from the site. A rope and pulley system, to lift the decants above the SRP water level, is the preferred mechanism; however other options such as plumbing bungs, valves or screw on end caps can also be used subject to the specific details of each SRP

- Place any manhole riser on a firm foundation of impervious soil
- Lay the discharge pipe at a 1 – 2% gradient. The fill material should be compacted using a machine compactor and must incorporate anti-seep collars around the pipe to increase the seepage length along the pipe with a spacing of approximately 10 m. The vertical projection of each collar should be 500 mm, and they must be watertight including their connections
- Do not place pervious material such as sand or scoria around the discharge pipe or the anti-seep collars
- Install baffles if required
- Fully stabilise the external batter face, by vegetative or other means, immediately after construction, in accordance with the site's approved ESC Plan
- Provide an all-weather access track for maintenance. Consider future maintenance. Construct a muck-out bund adjacent to the forebay if space for future desilting maybe an issue
- Install and commission flocculant treatment devices
- Certify the SRP to confirm all design criteria have been met. Rectify any deficiencies as required
- Install sediment-laden diversions to direct runoff to the SRP.

Maintenance

For maintenance of SRPs:

- Inspect SRPs daily and before and after each rainfall event
- Clean out SRPs before the volume of accumulated sediment reaches 20% of the total SRP volume. To assist in gauging sediment loads, clearly mark the 20% volume height on the decant riser
- Clean out SRPs with high capacity sludge pumps, or with excavators (long reach excavators if needed) loading onto sealed tip trucks or to a secure bunded area where the sediment can dry
- Maintain access to the forebay at all times to allow removal of accumulated sediment. Clean out the forebay after each runoff event if there is any evidence of sediment deposition
- The ESC Plan should identify disposal locations for the sediment removed from the SRP. Deposit the sediment in a location that avoids direct discharge to receiving environments. Stabilise all disposal sites as required and approved in the site's ESC Plan. Provide all weather access for the desilting and secure bunded areas if the SRP is to operate throughout winter
- Immediately repair any damage to SRPs caused by erosion or construction equipment.

F1.1.3 Decommissioning

The decommissioning of an SRP should only occur once the contributing catchment has been fully stabilised or alternative appropriate sediment retention devices have been installed.

The following steps should be followed:

1. Dewater pond (refer section G1.0)
2. Remove and correctly dispose of all accumulated sediment
3. Remove fabric, concrete, pipe and other construction materials
4. Backfill the pond, compact soil, and re-grade as required
5. Stabilise all exposed surfaces.

F1.2 Decanting earth bunds

F1.2.1 Design

Definition

Decanting earth bunds (DEBs) are an impoundment area formed from a temporary bund or ridge of compacted earth (refer Figures 78 and 79). These bunds provide an area where ponding of runoff can occur and suspended material can settle out before runoff is discharged.

Purpose

The purpose of a DEB is to detain runoff flows so that deposition of transported sediment can occur through settlement.



Figure 78: Close up of decanting earth bund system

Conditions where practice applies

DEBs can be used where:

- Treatment of sediment-laden runoff is required
- Concentrated flows of sediment-laden runoff occur
- Soil types require flocculant treatment to improve efficiency
- The catchment area is too small for an SRP (generally less than 0.3 ha)
- Where the slopes of the contributing catchment and or concentrated flows dictate that silt fences or super silt fences are not appropriate.

DEBs are particularly useful for controlling runoff after topsoiling and grassing before vegetation becomes established. DEBs should be used a part of a treatment train approach.

Limitations

DEBs have the following limitations:

- Specific geotechnical design may be needed to impound the required volumes of water (depending on geotechnical constraints)
- Effectiveness of DEBs is less on steeper slopes where runoff velocities are greater
- The recommended maximum catchment for DEBs is 0.3 ha.

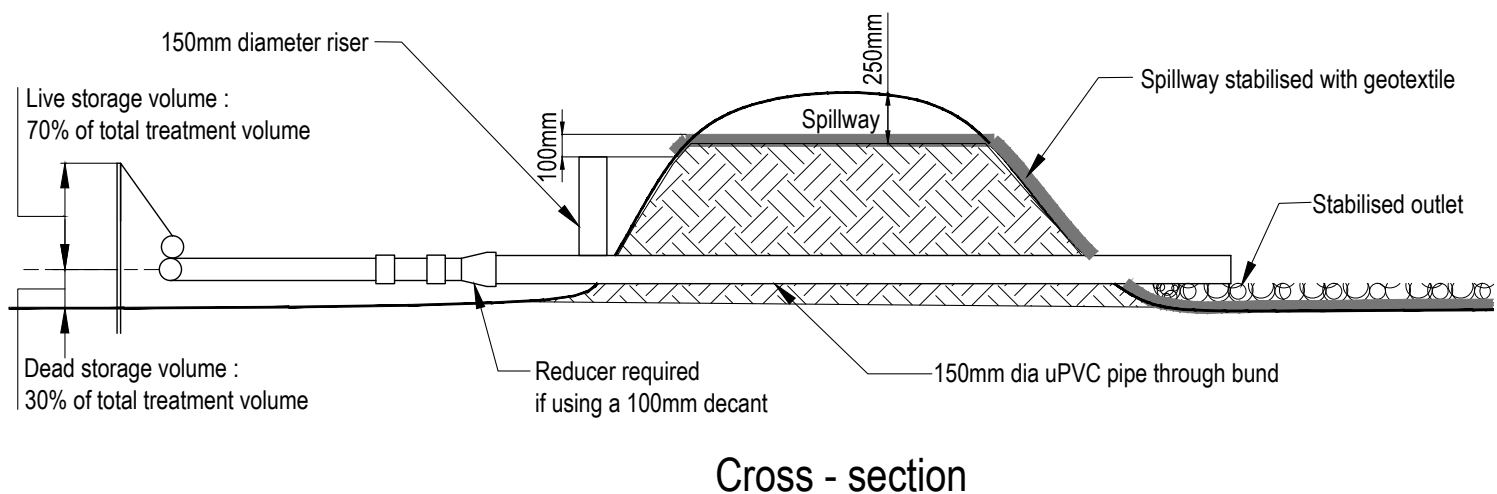


Figure 79: Decanting earth bund

Key design criteria

DEBs are often installed in challenging locations where achieving all of the following design criteria may be impractical. As these criteria are all interrelated, it is important that any compromise of these design criteria continues to achieve the following goals:

- Maximise the volume of storage, to maximise the duration of settlement
- Reduce velocities through length to width ratios, and or baffles, to promote settlement
- Maintain an appropriate dead water depth and volume to dissipate inflow energy, prevent re-suspension of settled sediment and provide storage of settled sediment
- Maintain an appropriate live water depth and volume to promote settlement
- Ensure that the installed device is structurally sound and includes a stabilised spillway sized to accommodate the 1% AEP event without eroding.

Size

- DEB sizing is based on contributing catchment area.
- On earthwork sites with slopes less than 18% and less than 200 m in length, construct a DEB with a minimum volume of 1% of the contributing catchment area (10 m³ for each 1,000 m² of contributing catchment).
- On earthwork sites with slopes greater than 18 % or greater than 200 m in length, construct a DEB with a minimum volume of 2% of the contributing catchment area (20 m³ for each 1,000 m² of contributing catchment).
- The slope angle is determined by the slope immediately above the DEB, or by the average slope over the contributing catchment, whichever is greater. The slope angle should also be the greater of the pre- or post-construction slope.
- The above calculation defines the total storage volume which is measured from the base of the DEB to the top of the primary spillway.

Shape

- Maximise the distance between the inlet and the outlet (including the emergency spillway) to reduce the risk of short circuiting and to promote quiescent (inactive) conditions.
- The base of a DEB should be a minimum of 2 m wide.
- The length to width ratio of the DEB should be no less than 3:1 and no greater than 5:1. The length to width ratio is measured at the height of the primary spillway.
- The length of the DEB is measured as the distance between the inlet and the outlet (decant system). As a minimum the inlet should be 5 m from the outlet.
- Ensure that the DEB has a level invert to promote the even and gradual dissipation of the heavier inflow water across the full area of the DEB.

Depth of pond

- Limit the depth of DEBs to a maximum of 1 m embankment height. (**Note:** By excavating to form the dead storage volume below existing ground level, the overall depth of DEB can be increased.)

Dead storage (permanent storage)

- Dead storage is the component of impoundment volume that does not decant and remains in the DEB. It is important for dissipating the energy of sediment-laden inflows.
- Ensure dead storage is 30% of the total DEB storage by positioning the decant 0.30 – 0.40 m above the invert of the DEB.

Live storage (decant storage)

- Live storage is the volume between the decant outlet level and the crest of the DEB primary spillway.
- Ensure that the live storage volume capacity is 70% of the total DEB storage.

Decanting/outlet dewatering device

- Dewater the DEB to remove the water within the upper water column (live storage) without removing any of the settled sediment, and without removing any appreciable quantities of floating debris.
- To dewater the DEB, use a floating T-bar dewatering device (as utilised in a SRP), which allows for the decanting of the cleaner surface water from the top of the water column. (**Note:** A 100 mm or 150 mm diameter T-bar device can be used. A standard T-bar design is detailed in Figure 67. There are also skimmers available (which float on the surface) or vertical upstands (traditional); however the T bar is the minimum standard.)
- The recommended decant rate from a DEB is 0.3 litres/second/1,000m² (or 3 litres/second/ha) of contributing catchment. This rate ensures that appropriate detention times are achieved. (**Note:** This decant rate is equivalent to the decant rate described for a sediment retention pond in section F1.1.)

- To calculate the number of holes (10 mm diameter) required to achieve the decant rate described above, allow 133 holes per 1 ha of contributing catchment (i.e. divide the number of ha of contributing catchment by 0.0075). The total number of holes is to be evenly divided among the number of decants.
- The T-bar decant must be able to operate through the full live storage depth of the DEB.
- Ensure that the T-bar decant float is securely fastened with steel strapping directly on top of the decant arm and weight it to keep the decant arm submerged just below the surface through all stages of the decant cycle. This will also minimise the potential for blockage of the decant holes by floating debris. The most successful method found to date is to weight the decant arm by strapping a 0.9 m long waratah between the float and the decant (approximately 2.0 kg of weight).
- Lay the 150 mm diameter discharge pipe at a 1 – 2% gradient, and compact the fill material around it using a machine compactor.
- At the inlet end of the outlet pipe install a 90° Tee to accommodate the primary spillway. Install a 150 mm-100 mm reducer and short 100 mm section to provide a connection for the T-bar.
- The decant should include a mechanism to allow outflows from the DEB to be temporarily stopped. This is to facilitate batch-dosed flocculant treatment and as a contingency in the event of spill or discharge of contaminants. It will allow contaminated runoff to be retained and prevent it from discharging from the site. A rope and pulley system, to lift the decant, is the preferred mechanism; however other options, such as plumbing bungs, valves or screw on end caps, can also be used subject to the specific details of each DEB.

Primary spillway

- All DEBs require a piped primary spillway.
- Use a 150 mm upstand as a primary spillway.
- The primary spillway should be a minimum 350 mm lower than the top of the DEB embankment and a minimum 100 mm lower than the emergency spillway crest. Ensure the riser and the discharge pipe connections are all completely watertight.
- Geotextiles shall be fixed within the spillway structure in accordance with the manufacturer's specifications.

Emergency spillway

- An emergency spillway is essential for all DEBs.
- Emergency spillways must be capable of accommodating the 1% AEP event without eroding.
- Design the emergency spillway as a stabilised trapezoidal cross-section with a minimum bottom width of 1.5 m, unless specific design calculations have confirmed a smaller emergency spillway will accommodate the 1% AEP event.
- Design the emergency spillway with a minimum of 100 mm freeboard height above the primary spillway.
- Ensure that the emergency spillway has a minimum freeboard of 250 mm (between the invert of the spillway to the lowest point on the top of the bund).

Baffles

- As with SRPs, baffles can be used to increase the length to width ratio of a DEB; however additional care is needed due to the typically narrow nature of DEBs. In practice, the use of baffles is often limited.
- Consider baffles in the DEB design where the recommended shape cannot be achieved. Extend baffles the full depth of the DEB and place them to maximise dissipation of flow energy.
- Generally, baffles are in the form of a wing to direct inflows away from the outlet and maximise the stilling zone. A series of compartments within the pond can be used to achieve this; although care must be taken to avoid creating in-pond currents and re-suspension of light particulates.

Safety

DEBs can become a safety hazard if not appropriately fenced and if safety rules are not followed. Check the safety requirements of Worksafe NZ. Refer Section C.1.8.2 for further guidance on safety issues.

Flocculant Treatment

Flocculant treatment should be used for all DEBs to increase their efficiency, unless other justification is provided.

The details of various flocculant treatment options are provided in Section F2.0 and Auckland Council's Technical Publication TP227 - '*The Use of Flocculants and Coagulants to Aid the Settlement of Suspended Sediment in Earthworks Runoff : Trials, Methodology and Design*', June 2004.

F1.2.2 Construction, operation and maintenance

Construction and operation

For construction and/or operation of DEBs follow the following key steps:

- Form clean water diversion bunds or drains to isolate the DEB construction area
- Install a silt fence or other appropriate sediment control below the DEB construction area
- Clear areas under proposed fills of topsoil or other unsuitable material down to competent material
- Consider whether large fill embankments need to be keyed in. Ensure that the embankments, including the foundations, comply with appropriate engineering design standards
- Use only approved fill
- Place and compact fill in layers as per the engineering specifications
- Do not place pervious materials such as sand or gravel within the fill material
- Construct fill embankments approximately 10% higher than the design height to allow for settlement of the material. Install appropriate pipe work during the construction of the embankment and compact around appropriately. Where possible, install the discharge pipe through the embankment once the embankment fill height provides sufficient cover over the pipe to continue filling once the discharge pipe has been installed. Ensure that the backfill around the outlet pipe is impermeable
- Install the emergency spillway. The outer emergency spillway crest and batter require a very high standard of stabilisation. The fill material of the spillway batter should be well compacted. Where possible, construct emergency spillways in well vegetated, undisturbed ground (not fill) and discharge over long grass. If the emergency spillway is constructed on bare soil, provide complete erosion protection by means such as grouted rip-rap, asphalt, erosion matting/ geotextile or concrete. When using geotextile for emergency spillway stabilisation purposes, the batter face must be smooth and all voids eliminated. If geotextile is used, a soft needle punch geotextile is laid first and then covered with a strong woven low permeability geotextile. Ensure the geotextile is pinned at 0.5 m centres over the full area of the emergency spillway
- Securely attach the decant system to the horizontal pipework. Position the T-bar decant at the correct height by tying 5 mm nylon cord through decant holes at either end of the decant arm and fastening it to waratahs driven in on either side of the decant. Use a flexible thick rubber coupling to provide a connection between the decant arm and the discharge pipe. To provide sufficient flexibility, install two couplings. Fasten the flexible coupling using strap clamps and glue. Make all connections watertight
- Do not place pervious material such as sand or scoria around the discharge pipe
- Install baffles if required
- Fully stabilise the external batter face, by vegetative or other means, immediately after construction in accordance with the site's approved ESC Plan. Ensure all bare areas associated with the DEB are stabilised with vegetation if the DEB is to remain in place over winter
- Provide an all-weather access track for maintenance
- Install and commission any flocculant treatment devices
- Produce an as-built to confirm all design criteria have been met. Rectify any deficiencies as required
- Install sediment-laden diversions to direct runoff to the DEB.

Maintenance

To maintain DEBs:

- Inspect DEBs daily and before and after each rainfall event
- Clean out DEBs before the volume of accumulated sediment reaches 20% of the total DEB volume. To assist in gauging sediment loads, consider installing a marker post
- Clean out DEBs with high capacity sludge pumps, or with excavators (long reach excavators if needed), loading onto sealed tip trucks or to a secure area
- The ESC Plan should identify disposal locations for the sediment removed from the DEB. Deposit the sediment in such a location so that it does not lead to a direct discharge to receiving environments. Stabilise all disposal sites as required and approved in the site's ESC Plan
- Immediately repair any damage to DEBs caused by erosion or construction equipment.

F1.2.3 Decommissioning

The decommissioning of a DEB is only to occur once the contributing catchment has been fully stabilised or alternative appropriate sediment retention devices have been installed.

The key steps for decommissioning comprise:

1. Dewater the DEB (refer Section G1.0)
2. Remove and correctly dispose of all accumulated sediment
3. Remove fabric, concrete, pipe and other construction materials
4. Backfill the DEB and compact soil, re-grade as required
5. Stabilise all exposed surfaces.

F1.3 Silt fences

F1.3.1 Design

Definition

A silt fence is a temporary barrier of woven geotextile fabric that is used to capture mainly coarse sediments carried in sheet flow (refer Figures 80 to 83). Silt fences temporarily impound sediment-laden runoff, slowing down the flow rate and allowing sediment to settle out of the water.



Figure 80: Silt fence installed on edge of works

Purpose

The purpose of a silt fence is to detain runoff flows so that deposition of transported sediment can occur through settlement. They are not used to filter sediment out of runoff.

Conditions where practice applies

Use silt fences:

- Where there is a need to control sediment by intercepting sheet flow
- Where a site is low gradient, or is confined with a small contributing catchment, such as short batter fills and around watercourses
- To delineate the limit of disturbance on an earthworks site, such as riparian areas or bush reserves
- Where the installation of an earth or topsoil bund would destroy sensitive areas, such as bush and wetlands.

Do not install silt fences across watercourses or in areas of concentrated flows. Avoid trench excavations within the root zones of protected trees and trees that are to be retained.

Where there is a change in slope, no section of the fence should exceed a grade of 5% for a distance of more than 15 m.

Limitations

The following limitations apply to silt fences:

- Silt fences do not capture many soil particles finer than 0.02 mm in diameter (for example fine silts and clays) due to the short detention time of water behind the silt fence and relatively large pore size of most fabrics
- The pores in the silt fence fabric become clogged relatively quickly with fine textured sediments, which the result that the fabric becomes impermeable. Consequently, additional reinforcing (such as chain link fence – super silt fence) might be required (refer Section F3.0 for super silt fences)
- Silt fences should only be used for sheet flows, not concentrated flows. Do not use silt fences as checks

dams in channels (to reduce velocities) or place them where they will intercept concentrated flows

- Silt fences are best used a part of a treatment train approach.

Key design criteria

Key design criteria for silt fences are outlined below:

- Ensure silt fence height is 600 mm above ground level and 200 mm below ground level
- Maximum slope lengths, spacing of returns and angles for silt fences are shown in Table 12
- Locate supporting posts/waratahs for silt fences 2-4 m apart with support provided by a tensioned wire (2.5 mm HT) along the top of the silt fence
- Where a strong woven fabric is used in conjunction with a wire support, the distance between posts can be up to 4 m. Double the silt fence fabric over and fasten to the wire with silt fence clips at 500 mm spacings
- Ensure supporting posts/waratahs are embedded a minimum of 400 mm into the ground
- Always install silt fences along the contour (at a break in slope). Where this is not possible, or where there are long sections of silt fence, install short silt fence returns (refer Figure 82) projecting up-slope from the silt fence to minimise the concentration of flows. Silt fence returns should be a minimum 2 m in length, and can incorporate a tie back. They are generally constructed by continuing the silt fence around the return and doubling back, eliminating joins
- Join lengths of silt fence by doubling over fabric ends around a waratah or by stapling the fabric ends to a batten and butting the two battens together as shown in Figure 82
- Install silt fence returns at either end of the silt fence, projecting up-slope to a sufficient height to prevent outflanking
- In catchments of more than 0.3 ha, use of silt fences requires careful consideration of specific site measures, and other control measures may be better, such as a super silt fence (refer Section F1.4).


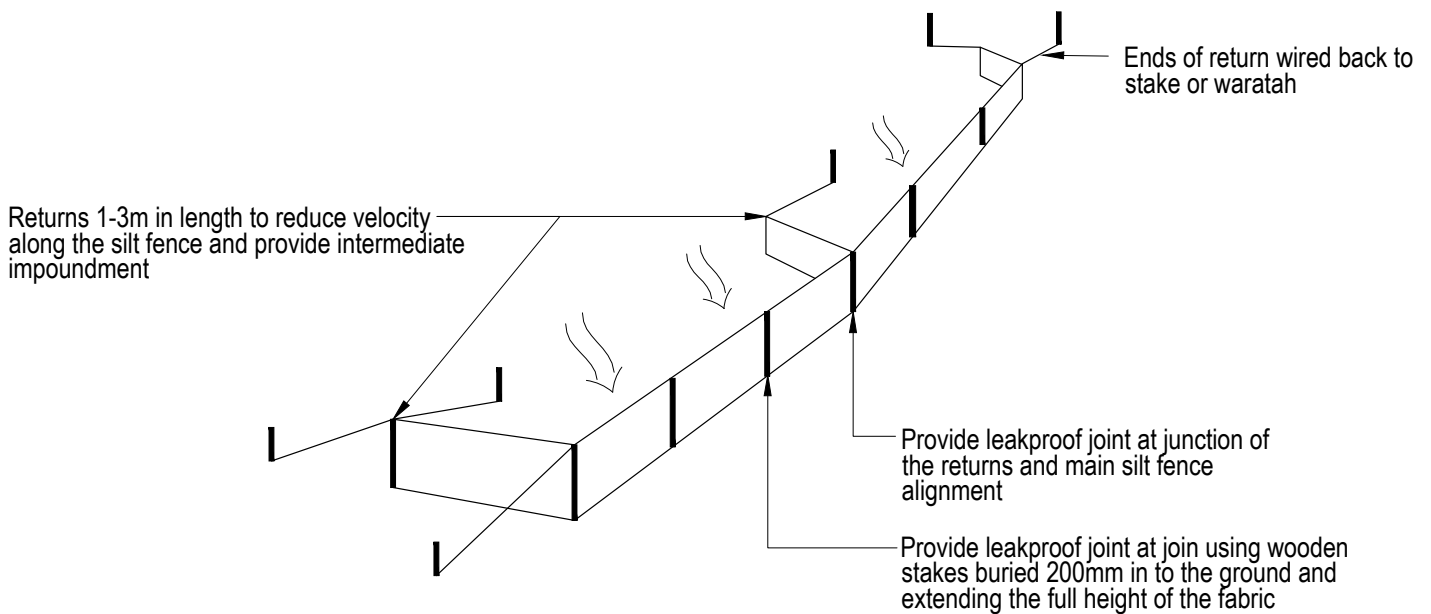


Figure 81: Silt fence joins. Left hand photo shows battens used to join the lengths. Right hand photo shows doubling over of fabric at end around the waratah

Table 12: Silt fence design criteria


Slope steepness %	Slope length (m) (maximum)	Spacing of returns (m)	Silt fence length (m) (maximum)
Flatter than 2%	Unlimited	N/A	Unlimited
2 – 10%	40	60	300
10 – 20%	30	50	230
20 – 33%	20	40	150
33 – 50%	15	30	75
> 50%	6	20	40

- Where water may pond regularly behind the silt fence, provide extra support for the silt fence with tie backs from the silt fence to a central stable point on the upward side. Extra support can also be provided by stringing wire between support stakes and connecting the filter fabric to this wire.
- As a minimum, the silt fence cloth must meet the following criteria for geotextile fabric:
 - Grab tensile strength: >440N (ASTM D4632)
 - Tensile modulus: 0.140 pa (minimum)
 - Apparent opening Size: 0.1 – 0.5mm (ASTM D4751).

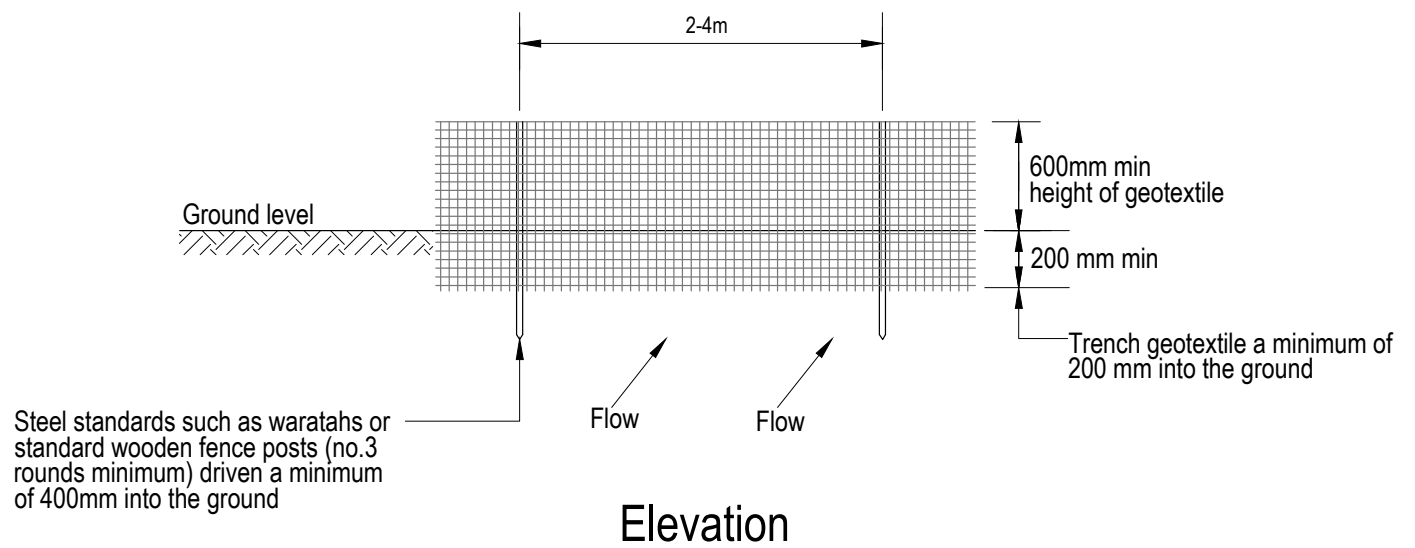


Silt fence with returns and support wire

Figure 82: Schematic of a silt fence

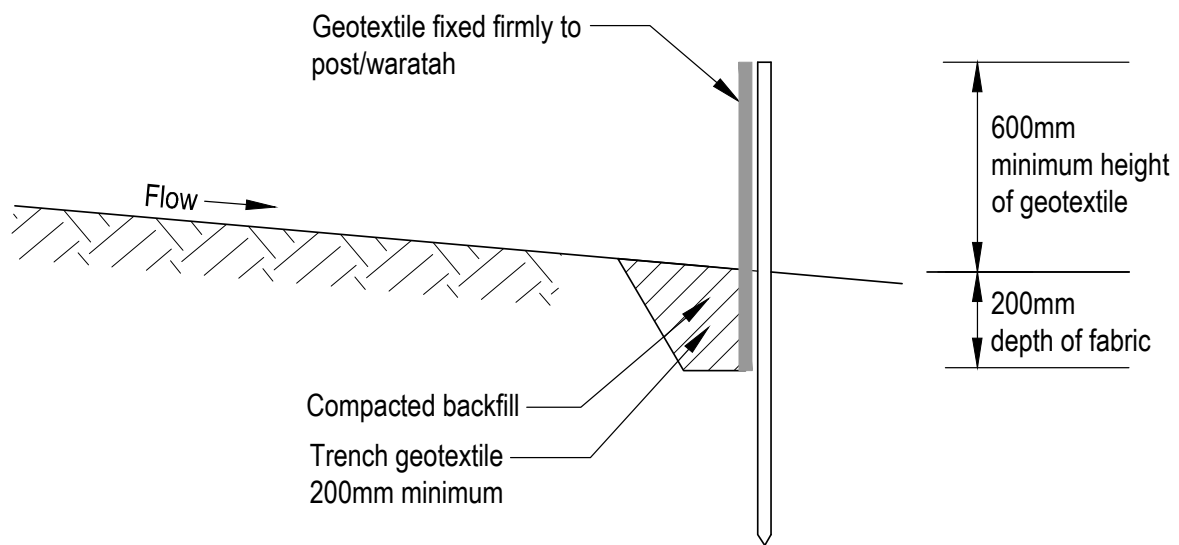

Cross - section

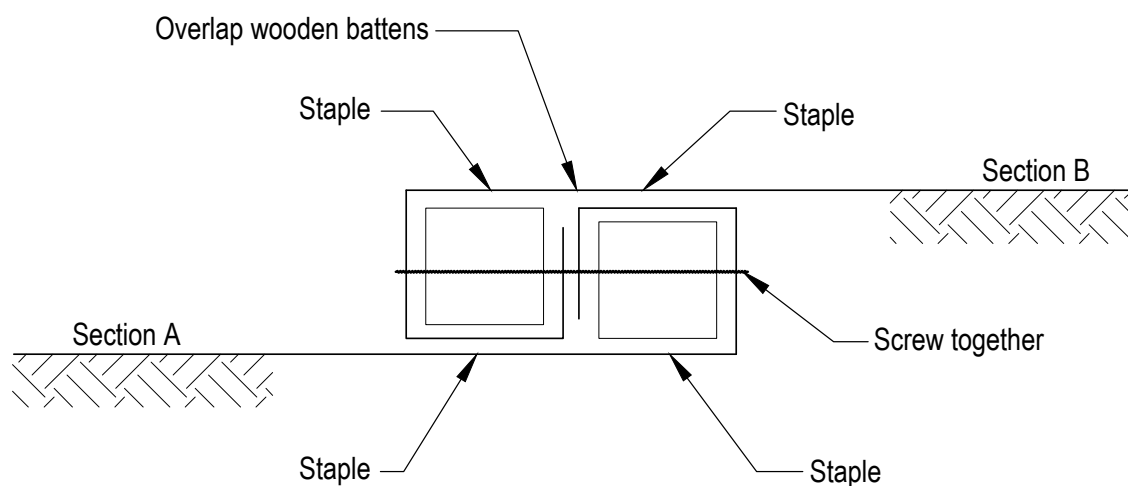

Standard fabric joint

Figure 83: Silt fence cross-section

F1.3.2 Construction, operation and maintenance

Construction and operation

For constructing and/or operating silt fences, follow the following steps and refer Figure 84 below:

STEP 1

Dig a 200mm deep trench

STEP 2

Hammer in 1m waratahs or wooden fence post 200mm into the trench, therefore 400mm below original ground level

STEP 3

Install single galvanised wire and tension it at 50m intervals

STEP 4

Install single layer of geotextile fabric hard against the side of the trench (800mm total height)

STEP 5

Back fill and compact well (critical)

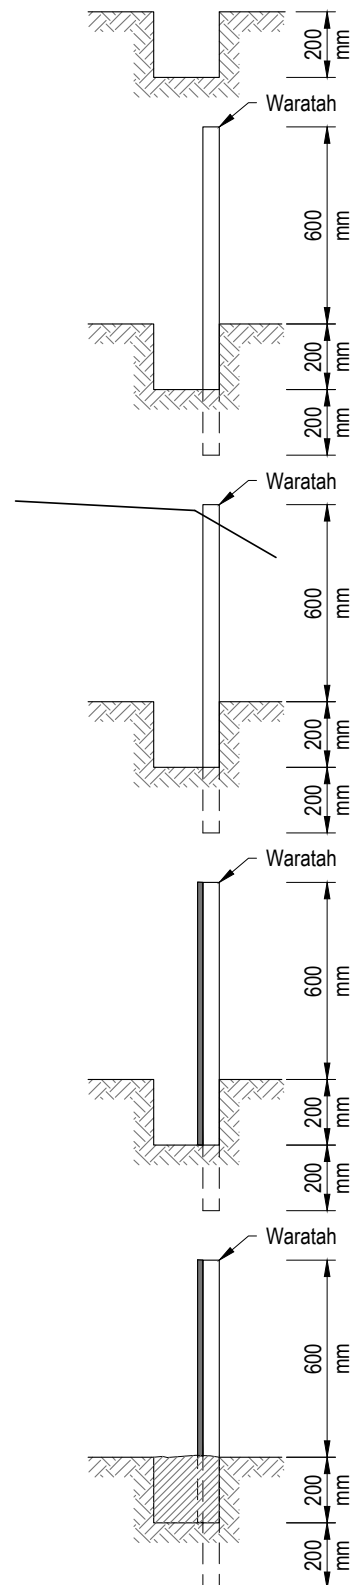


Figure 84: Step-by-step installation of a silt fence

- Use silt fence material appropriate to the site conditions and in accordance with the manufacturer's specifications
- Always install silt fences along the contour (refer Figure 85)
- Excavate a trench a minimum of 100 mm wide and 200 mm deep along the proposed line of the silt fence
- Use waratahs at least 1.5 m in length
- Install the support waratahs on the down-slope edge of the trench and silt fence fabric on the up-slope side of the support waratahs to the full depth of the trench, then backfill the trench with compacted soil
- Install the waratahs so that they are as flat as possible against the silt fence. If the waratah edge is against the silt fence, it will rub and eventually rip against the waratah
- Use correct silt fence clips (refer Figure 86) to secure the silt fence material to the top wire. Wire ties and staples rip the silt fence material when the weight of the impounded water pushes against the silt fence and are not to be used
- Reinforce the top of the silt fence fabric with a support made of high tensile 2.5 mm diameter galvanised wire. Tension the wire using permanent wire strainers attached to angled waratahs at the end of the silt fence
- Where ends of silt fence fabric come together, ensure they are overlapped, folded and stapled/ screwed to prevent sediment bypass.



Figure 85: Contours create the same effect as returns in this case



Figure 86: Use of silt fence clips

Maintenance

To maintain silt fences:

- Inspect silt fences at least once a week and after each rainfall
- Check for damage including rips, tears, bulges in the fabric, broken support wires, loose waratahs, overtopping, outflanking, undercutting, and leaking joins in fabric
- Make any necessary repairs as soon as identified
- As the geotextile material becomes clogged with sediments, this will result in increased duration of ponding. Therefore, careful cleaning of the silt fence geotextile with a light broom or brush may be appropriate
- Remove sediment when bulges occur or when sediment accumulation reaches 20% of the fabric height
- Remove sediment deposits as necessary (prior to 20% of fabric height) to continue to allow for adequate sediment storage and reduce pressure on the silt fence
- Dispose of sediment to a secure area to ensure that it does not discharge to the receiving environment.

F1.3.3 Decommissioning

When decommissioning a silt fence:

- Do not remove silt fence and accumulated sediment until the catchment area has been appropriately stabilised
- Remove and correctly dispose of accumulated sediment
- Backfill trench, re-grade and stabilise the disturbed area.

F1.4 Super silt fences

F1.4.1 Design

Definition

A super silt fence is a temporary barrier of woven geotextile fabric over a chain link fence that is used to capture predominantly coarse sediments carried in sheet flows (refer Figures 87 and 88). Super silt fences temporarily impound sediment-laden runoff, reduce velocities and allow sediment to settle out of the water.



Figure 87: Super silt fence

Purpose

The purpose of a super silt fence is to detain runoff flows so that deposition of transported sediment can occur through settlement.

Conditions where practice applies

The use of super silt fences is similar to that of silt fences. However, super silt fences are a more robust device that is appropriate to control runoff from steeper or larger catchments than silt fences.

Super silt fences should be used:

- To intercept sheet flow
- To delineate the limit of disturbance on an earthworks site such as riparian areas or bush reserves
- To provide a barrier that can collect and hold debris and soil, preventing the material from entering critical areas, watercourses or streets
- Where the installation of an earth or topsoil bund would destroy sensitive areas such as bush and wetlands.

Super silt fences should be placed as close to the contour as possible. No section of the fence should exceed a grade of 5% for a distance of more than 15 m.

Do not install super silt fences across watercourses or in areas of concentrated flows.

Limitations

The following limitations apply to super silt fences:

- Super silt fences do not capture many soil particles finer than 0.02 mm in diameter (for example fine silts and clays) due to the short detention time of water behind the super silt fence and relatively large pore size of most fabrics
- The pores in the super silt fence fabric become clogged relatively quickly with fine textured sediments, which result in the fabric becoming impermeable

- They are only used for sheet flows not concentrated flows. Do not use super silt fences as check dams in channels (to reduce velocities) or place them where they will intercept concentrated flows
- Super silt fences should be used a part of a treatment train approach.

Key design criteria


The following design criteria apply to super silt fences (also refer Figure 88):

- Ensure super silt fence height is 800 mm above ground level
- Maximum slope lengths, spacing of returns and maximum silt fence lengths are shown in Table 13
- Always install super silt fences along the contour (at a break in slope). Where this is not possible, or where there are long sections of super silt fence, install short silt fence returns projecting up-slope from the silt fence to minimise the concentration of flows. Silt fence returns should be a minimum 2 m in length, and can incorporate a tie back. They are generally constructed by continuing the silt fence around the return and doubling back, eliminating joins
- Join lengths of silt fence by doubling over fabric ends around a waratah or by stapling the fabric ends to a batten and butting the two battens together
- Install silt fence returns at either end of the silt fence, projecting up-slope to a sufficient height to prevent outflanking
- When considering super silt fence installation for larger catchments (greater than 0.5 ha) as in Table 13, carefully consider the specific site conditions and other alternative control measures available
- Base the length of the super silt fence on the limits shown in Table 13


Table 13: Super silt fence design criteria

Slope steepness %	Slope length (m) (maximum)	Spacing of returns (m)	Super silt fence length (m) (maximum)
0 – 10%	Unlimited	60	Unlimited
10 – 20%	60	50	450
20 – 33%	30	40	300
33 – 50%	30	30	150
> 50%	15	20	75

- Where the ends of the geotextile fabric come together, overlap, fold and staple the fabric ends to prevent sediment bypass
- The geotextile fabric must meet the following requirements:
 - Grab tensile strength: >440N (ASTM D4632)
 - Tensile modulus: 0.140 pa (minimum)
 - Apparent opening size: 0.1 – 0.5mm (ASTM D4751).

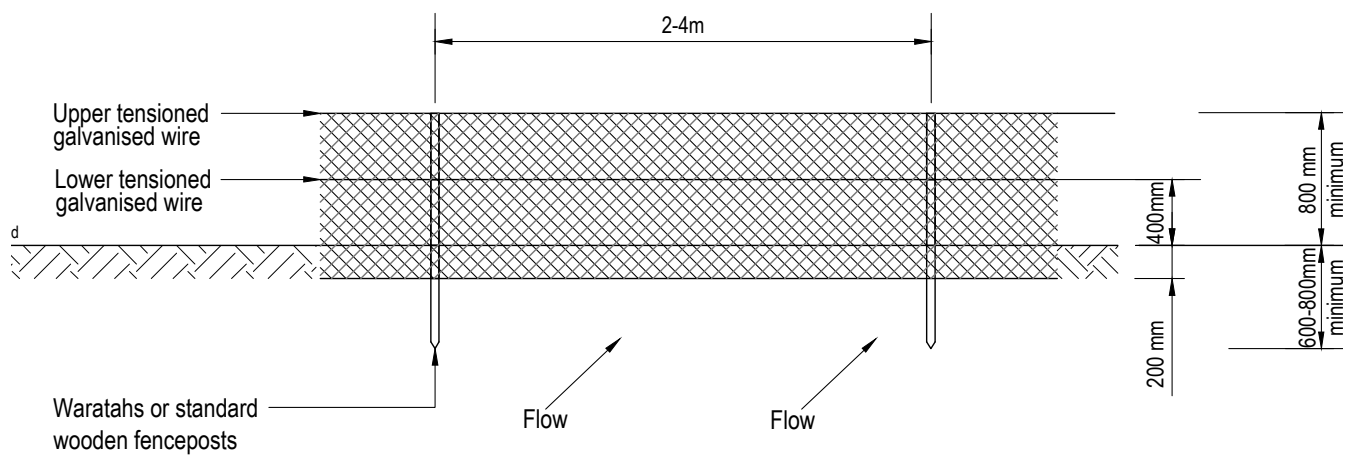

Elevation

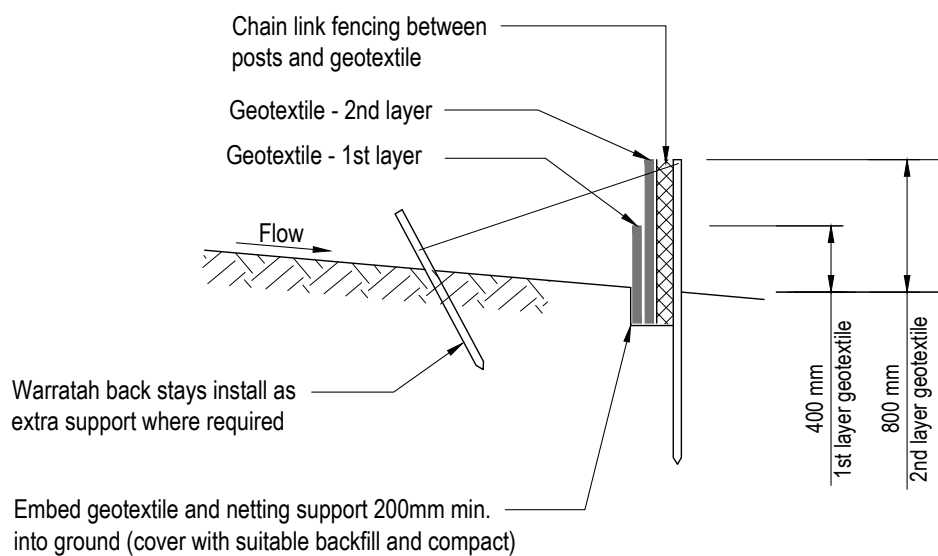

Cross - section

Figure 88: Schematic of a super silt fence

F1.4.2 Construction, operation and maintenance

Construction and operation

For construction and/or operation of super silt fences, follow the following key steps and refer to Figure 89 below:

- Use super silt fence material appropriate to the site conditions and in accordance with the manufacturer's specifications
- Always install super silt fences along the contour
- Excavate a trench a minimum of 100mm wide and 200 mm deep along the proposed line of the super silt fence
- Use supporting waratahs at least 1.8 m in length
- Ensure the 1.8 m long waratahs are driven to an appropriate depth (0.8 m minimum)
- Install tensioned galvanised wire (2.5 mm HT) at 400 mm and again at 800 mm above ground. Tension the wire using permanent wire strainers attached to angled waratahs at the ends of the super silt fence
- Secure chain link fence to the waratahs with wire ties or staples, ensuring the chain link fence goes to the base of the trench
- Fasten the super silt fence material securely with ties spaced every 600 mm at the top and mid-section of the super silt fence. (**Note:** Most manufactures now supply specific super silt fence geotextile with the two layers of geotextile already joined)
- Place the super silt fence material into the base of the trench (a minimum of 200 mm into the ground) and place compacted backfill back to the original ground level
- When two sections of super silt fence material adjoin each other, ensure they are doubled over a minimum of 300 mm, wrapped around a waratah and fastened at 75 mm spacings to prevent sediment bypass.


STEP 1

Dig a 200mm deep trench




STEP 2

Hammer in 1.8m waratahs 800mm into the trench (therefore 1000mm below original ground level)

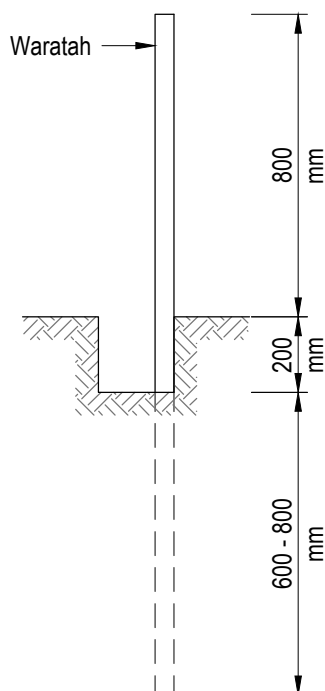


STEP 4

Install chain link fencing and two layers of geotextile fabric - first layer is 600mm total height and second is 1000mm total height.

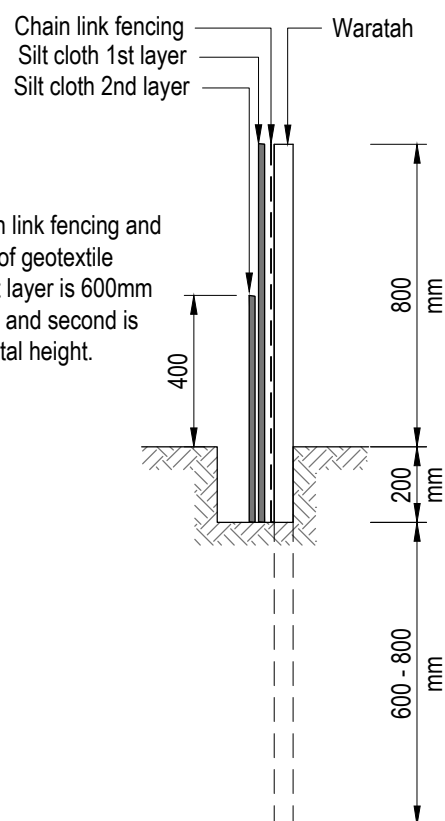

STEP 3

Install two rows galvanised wire and tension at 50m intervals

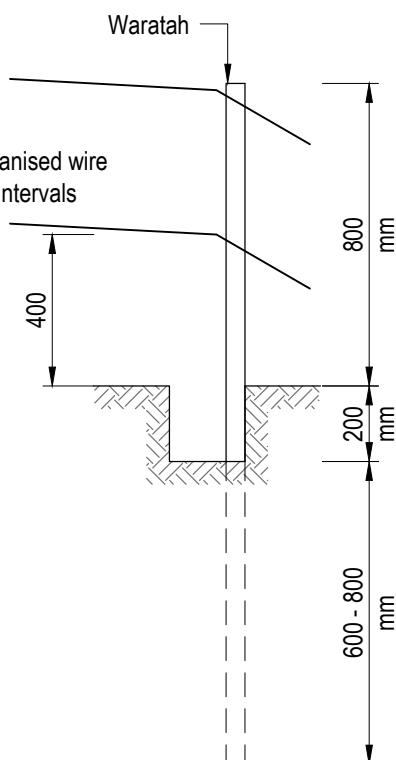

STEP 5

Back fill and compact well (critical)

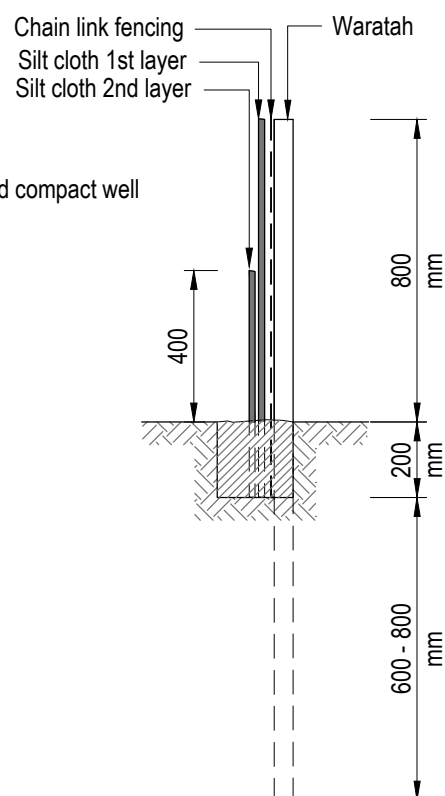


Figure 89: Step-by-step installation of a super silt fence

Maintenance

To maintain super silt fences:

- Inspect super silt fences at least once a week and after each rainfall
- Check for damage including rips, tears, bulges in the fabric, broken support wires, loose waratahs, overtopping, outflanking, undercutting, and leaking joins in the fabric
- Make any necessary repairs as soon as identified
- As the geotextile material becomes clogged with sediments, the duration of ponding increases. Therefore, careful cleaning of the super silt fence geotextile with a light broom or brush may be appropriate
- Remove sediment when bulges occur or when sediment accumulation reaches 20% of the fabric height
- Remove sediment deposits as necessary (prior to deposits reaching 20% of fabric height) to continue to allow for adequate sediment storage and reduce pressure on the super silt fence
- Dispose of sediment to a secure area to ensure it does not discharge to the receiving environment.

F1.4.3 Decommissioning

For decommissioning of super silt fences:

- Do not remove the super silt fence and accumulated sediment until the catchment area has been appropriately stabilised
- Remove and correctly dispose of accumulated sediment
- Backfill trench, re-grade and stabilise the disturbed area.

F1.5 Silt socks

F1.5.1 Design

Definition

Silt socks are a tubular stormwater sediment control and filtration device, consisting of a mesh tube filled with a filter material (e.g. compost, sawdust, wood bark, straw) used to intercept and filter runoff (refer Figure 90). They are also referred to as 'filter socks'.

Purpose

Silt socks have a limited capacity to capture and treat sediment-laden flows and so are generally used for small, flat, isolated catchment areas (refer Tables 14 and 15 below).

Silt socks temporarily impound sediment-laden runoff, slowing down the flow rate and allowing sediment to settle out of the water.

Silt socks can be used to:

- Intercept and impound sheetflow
- Intercept and impound runoff before it enters a catchpit or other stormwater inlet
- Reduce the velocity of runoff flows within a channel (as a check dam)
- Contain and impound discharges from pumped stormwater or concrete washwater (commonly referred to as a 'turkeys nest').

Silt socks can be used to divert flows and are commonly used for this purpose across haul roads when rain is forecast, or at the end of the day. They are also used as check structures in diversion drains and flow paths. These uses are not discussed in this section, which is restricted to the use of silt socks as a sediment management tool. For use of a silt sock device for catchpit protection refer to Section F1.6.



Figure 90: Silt sock used to provide control during final landscaping

Conditions where practice applies

Silt socks should be used:

- On small, low gradient sites (e.g. short batter fills and around watercourses and vegetated or protected areas) (refer Tables 14 and 15)
- As a secondary containment and treatment structure where it is not possible to divert flows to a sediment retention facility
- Where it is necessary to slow channel velocity
- Where concrete washwater or pumped stormwater is required to be treated prior to discharge.

Limitations

The following limitations apply to silt socks:

- Silt socks can only be used in very small catchments (refer Tables 14 and 15)
- Silt socks have a low sediment storage capacity and therefore do not capture many fine soil particles (for example fine silts and clays) due to the short detention time of water behind the silt sock
- Over relatively short periods of time, the filter material can settle/compact, resulting in a reduction in both storage volume and filtration capacity. As such, silt socks are only appropriate as a short-term control
- As a sediment treatment device, they should only be used for sheet flows, not concentrated flows. Using a silt sock as a check dam in channels (to reduce velocities) or placing them where they will intercept concentrated flows, is a separate management approach (refer to check dams in Section E2.4)
- Silt socks are heavy, particularly when wet. Generally they require an excavator to move them, which can result in damage to the silt sock
- Silt socks can be difficult to install in complete contact with the ground on coarse or uneven terrain.
- Silt socks have high maintenance requirements (refer section F1.5.2)
- Silt socks are susceptible to traffic damage
- **Do not** use silt socks as a standalone treatment device. Rather they should be used as a part of a treatment train approach.

Key design criteria

The following design criteria apply to silt socks:

Perimeter control

- Ensure the appropriate sized silt sock is used (see design criteria in Tables 14 and 15).

Table 14: 300 mm diameter silt sock

Slope steepness (%)	Maximum slope length (m)	Spacing of returns (m)
Flatter than 2%	100	N/A
2%-10%	40	30
10%-20%	30	25
20%-33%	10	10
33%-50%	5	10
>50%	2	5

Table 15: 450 mm diameter silt sock

Slope steepness (%)	Maximum slope length (m)	Spacing of returns (m)
Flatter than 2%	150	N/A
2%-10%	60	30
10%-20%	40	25
20%-33%	20	10
33%-50%	10	10
>50%	5	5

Compost specifications

- Ensure the compost medium used in the silt sock is free from contaminants and meets the specifications in Table 16.

Table 16: Specifications for compost

Parameter	Unit of measure	Specification
pH	pH units	5.0-8.5
Moisture content	% wet weight basis	>60
Organic matter content	% dry weight basis	25-100
Particle size	% passing a selected mesh size, dry weight basis	50 mm 99% passing; 10 mm 30-50% passing (or 50-70% retained); maximum 50 mm.

Bark specification

- Use 2-10 mm chip.
- Ensure bark is free from contaminants.

Sawdust specification

- Do not use treated wood sawdust.
- Ensure sawdust is free from contaminants.

Straw specification

- Ensure straw is free from weed seeds and contaminants.

General specifications for sock media

- The filter medium should be clean and free from contamination.

The material used to fill the sock will depend on the application. For example, if the sock is to be used as a filter, a porous material like rocks or wood bark will not be effective.

F1.5.2 Construction, operation and maintenance

Construction and operation

Silt socks can either be filled on site or prefabricated in suitable lengths prior to delivery to the site.

The silt sock should be produced from HDPE or polyester material with abrasion resistant netting weaves (a thread diameter of not less than 0.3 mm). The recommended weave for a compost sock (refer Figure 91) is an opening in the knitted mesh of 1-5 mm when filled. The weave for straw socks should have openings of no more than 20 mm. The silt sock shall then be filled with compacted filter material meeting the specifications detailed above.

Silt socks using a light filter medium such as straw or wood chips must be tied down using stakes and twine to prevent 'floating'.

Note: The above requirement to secure silt socks with a light filter medium will generally preclude their use on impervious surfaces such as concrete or seal.

For construction and/or operation of silt socks:

- Always install silt socks on the contour. Where this is not possible, or where there are long sections of silt sock, install short silt sock returns, projecting up-slope from the silt sock to minimise concentration of flows. Returns are to be a minimum of 2 m in length
- Where more than one length of silt sock is used, the silt socks are to be overlapped a minimum of 1 m (refer Figure 92) or, according to the manufacturer's recommendation, and joined by a sleeve (refer Figure 93)
- Install silt sock "wings" at either end of the silt sock, projecting a sufficient length up-slope to prevent outflanking
- Silt socks are to be pegged and secured depending on the application.

For additional security, bale twine may be used as shown in Figure 94. The bale twine is secured (four turns with a half hitch) to the pine stakes and tensioned when the stakes are driven into place.



Figure 91: Compost silt socks with returns installed



Figure 92: Silt sock with 1m overlapping joint



Figure 93: Silt sock joined using a sleeve and pegged and secured using bailing twine with 1 m overlapping joint



Figure 94: Straw sock secured in place using stakes and bale twine; note the stakes are placed every 600 mm

When using silt socks to construct turkeys nests (refer Figure 95):

- Set up a ring of silt socks, with the proposed pumping discharge point in the centre of the ring
- Ensure that the treated discharge from the “turkeys nest” will not result in erosion or the remobilisation of sediment
- The size of the ring will depend on the flows that are to be pumped. The flow and size of the ring will need to be such that the ring is not overtopped
- A base-laid permeable geotextile may be used to collect settled debris.

Maintenance

Consider the following when maintaining silt socks:

- Silt socks should be inspected regularly and after each rainfall event to ensure sediment control efficiency is maintained
- Accumulated sediment greater than 20% of the height of the silt sock should be removed, or another silt sock placed on top of the existing silt sock to maintain adequate sediment control
- Reuse of silt socks is possible provided the integrity of the sock and fill media is maintained.

F1.5.3 Decommissioning

Consider the following when decommissioning (removing) silt socks:

- Do not remove the silt sock and accumulated sediment until the catchment area has been appropriately stabilised (refer Figure 96)
- Remove and dispose of accumulated sediment.



Figure 95: ‘Turkeys nest’



Figure 96: Silt sock used to provide control during final landscaping works

F1.6 Stormwater inlet protection

F1.6.1 Design

Definition

Stormwater inlet protection is a barrier across or around a catchpit, a water sensitive design (WSD) device (e.g. rain garden) or other stormwater inlet. The protection may take various forms depending upon the type of inlet to be protected (refer Figure 97).

Purpose

This practice is used to intercept and filter sediment-laden runoff before it enters a reticulated stormwater system, via a catchpit, scruffy dome, manhole or WSD device. This reduces discharge of sediment-laden flows into receiving environments or into a permanent sediment control system during construction.

Conditions where practice applies

Stormwater inlet protection is a secondary sediment control device and must not be used as a standalone device. It must only be used in conjunction with other ESC measures, as part of a broader and more comprehensive ESC system.

Limitations

Stormwater inlet protection has the following limitations:

- It should not be used as a standalone treatment device
- It should not be used in concentrated flows such as at the inlet to a culvert
- It can have relatively low sediment removal efficiency and low sediment storage capacity
- It has high maintenance requirements (refer Section F1.6.2)
- There is potential for blockage of the device and therefore, increased risk of inundation
- The device can cause flooding to road carriageways due to its limited hydraulic capacity. Flooding can lead to public safety issues
- The device is easily damaged by vehicles and construction equipment.

Key design criteria

The following design criteria apply to stormwater inlet protection devices:

- Complete blocking of the stormwater system must be avoided, as this will divert flows during heavy rain and may cause other devices to become overwhelmed and/or create flooding hazards
- The height of catchpit protection within live road environments must be less than the kerb height so that runoff does not cause local flooding and/or direct flows to other nearby catchments.



Figure 97: Stormwater inlet protection silt fence within a construction yard (Note: Flooding not an issue in this case)

Silt fence

A silt fence (refer Section F1.3) can be erected around the inlet. This method is appropriate where catchpits have been connected to a stormwater system and are collecting runoff from disturbed soil surfaces within a construction site, where the retention of water will not create a flooding hazard (refer Figure 98). This is not appropriate for road maintenance or upgrade works within a 'live' roading situation where impounded water will create flooding issues.



Figure 98: Good use of a silt fence installed to protect a new stormwater catchpit where impounded water will not create a flooding hazard

Check dams

A series of low sandbag check dams can be installed up the gutter from the catchpit to act as a series of small sediment traps (refer Section E2.4). The check dams require a spillway lower than the kerb to ensure that runoff does not encroach onto the berm area and cause scouring. Check dams should comprise up to six sandbags laid end to end, in an arc away from the kerb and up the road to create a series of impoundment areas.

This measure is only suitable for very small catchment areas.

Check dams can also be constructed from silt socks (refer below), which will also provide a minor degree of filtration.



Figure 99: Installation of a silt sock to provide some protection to the catchpit

Silt socks

A silt sock (refer Section F1.5) can be placed around the inlet to act as a small sediment trap immediately up-slope of the catchpit (refer Figure 99). The silt sock needs to completely 'ring fence' the catchpit.

This measure is only suitable for very small catchment areas.

F1.6.2 Construction, operation and maintenance requirements

Construction and operation

Consider the following when constructing and/or operating stormwater inlet protection devices:

- Construction specifications will vary according to the type of inlet protection
- Always ensure an emergency bypass is included. Plan for where the bypass system will divert water to
- Ensure the device does not allow water to bypass its intended flow path.

Keep all stockpiles and loose sediment away from roadside table drains.

Maintenance

Consider the following when maintaining stormwater inlet protection measures:

- Maintenance will vary according to the type of inlet protection
- Inspect daily and during and after rainfall events
- Beware of blockages and leaks that may affect performance
- Check to see if flows have been diverted away from the device and what if any damage has been caused
- Clean all accumulated sediments immediately
- Repair and modify any problems immediately
- Remove devices as soon as works are complete.

F1.6.3 Decommissioning

Consider the following when decommissioning stormwater inlet protection measures:

- Devices **must be** decommissioned and removed after use
- Decommissioning will vary according to the type of inlet protection
- Remove and dispose of any accumulated sediments
- Remove control measures, then reuse and recycle components
- Stabilise any disturbed areas.

F2.0 Coagulant and flocculant treatment

F2.1 General

Note: This section outlines some guidance on the application of flocculants and coagulants for the purposes of ESC. It is intended to supplement information in Auckland Council's Technical Publication TP227 - *The Use of Flocculants and Coagulants to Aid the Settlement of Suspended Sediment in Earthworks Runoff: Trials, Methodology and Design*, June 2004.

F2.1.1 Definition

This type of treatment comprises the addition of reagents to sediment-laden runoff to increase the rate of settlement of fine soil particles. The treatment relies on two basic processes: coagulation and flocculation. A number of reagents are available; preference should be given to those which have a minimal impact on the receiving environment.

F2.1.2 Purpose

Flocculation and/or coagulation can be used to improve the efficiency of sediment retention devices. The physical and chemical nature of suspended clay particles means they settle very slowly. By adding certain reagents to the suspension, these particles join together to form larger particles and settle much more rapidly; thereby increasing the effectiveness and efficiency of the sediment retention device.

The reagent used, and the method of its use, is dependent on the soils onsite and the design of the sediment retention device.

F2.1.3 Coagulation

Coagulation will be most effective with soils that have a high proportion of fine colloidal particles. These particles typically have a negative electrostatic surface charge. These 'like charged' particles tend to repel each other, preventing coagulated particles from forming, such that the particles remain in suspension.

By adding a reagent that develops positive charges the colloidal material is destabilised, allowing the particles to clump together (coagulate) forming larger heavier particles.

F2.1.4 Flocculation

In the process of flocculation, the particles join together following the addition of the reagent to form 'flocs', which join together forming larger, heavier particles that settle more rapidly.



Figure 100: Rainfall activated flocculant treatment device

F2.1.5 Conditions where practice applies

This type of treatment will be effective for the majority of soils in the Auckland region, particularly in sediment retention ponds. To determine the likely effectiveness of treatment, a 'bench test' should be undertaken. The bench test will provide information on which coagulants and flocculants are most effective and the optimal dosage rate at which they should be applied. A bench test involves collecting a sample of the earthworks site's soil, mixing it with water in a clear cylinder and measuring the time the suspended sediment takes to settle.

Treatment for a sediment retention pond (SRP) should typically always be provided. In addition, decanting earth bunds (DEBs, refer to Section F1.2) can benefit from treatment.

F2.1.6 Limitations

The following limitations apply to treatment:

- Treatment should cease when the pH drops below 5.5 or rises above 8.5 (when using PAC)
- Treatment requires a high degree of monitoring and maintenance (refer Section F2.2)
- Spills of reagents can have significant adverse effects on the receiving environment
- In significant rainfall events (>15 mm in 24 hours), the rate of use needs to be carefully monitored so that the system does not run out of reagent.

Due to the above limitations treatment should only be implemented under the supervision of a suitably experienced and qualified professional.

F2.1.7 Treatment options

There are a number of treatment options in relation to both reagent type and the nature of dosing. The selection of the appropriate reagent will be subject to the soils on site, the sediment control measures used and the receiving environment. Mana whenua values should be considered in the choice with consideration given to organic alternatives where practicable. In all cases, bench testing of a variety of reagents is required to establish which option is most appropriate for sediment removal and receiving environment protection.

The majority of experience and research in the Auckland Region to date relates to the use of poly aluminium chloride (PAC). The guidance in the following sections therefore uses PAC as an example, as it is the best understood reagent at present. However, PAC may not be the most effective reagent in all situations due to site and subregional variances in soils or receiving environments. This is why bench testing of alternatives is crucial. Ongoing research into the use of other reagents is encouraged, and this guidance may be updated as understanding of the use and effects of other reagents develops. The majority of flocculants are typically available in a liquid or a solid (granulated) form, allowing dosing by either a rainfall activated system, a geosynthetic sock (floc sock) or batch dosing (refer to design details for each below).

The specific details of alternative reagents and dosing procedures proposed for each site should be included in the Flocculation Management Plan (FMP) (also often referred to as a Chemical Treatment Management Plan (CTMP)). The following sections detail the three main forms of treatment and dosing:

- Rainfall activated treatment (also called rainfall activated dosing, refer Figure 100)
- Floc sock treatment (also called floc sock dosing)
- Batch treatment (also called batch dosing).

Safety

The Material Safety Data Sheet (MSDS) for each reagent used in the treatment system should be obtained and the health and safety requirements reviewed and implemented at all times.

Storage of the bulk reagent required to replace used reagent should be in accordance with standard practice for storage of hazardous materials on site. Specifically, the reagent should be stored in a secure bunded facility.

The bunded area should either be covered to avoid rain collecting in the bunded area, or a regular maintenance programme should be implemented to drain rainfall that is collected, maximising the capacity of the bunded area for containing spills.

Storage of the reagent at each pond site should be within the locked shed. A small number of unopened drums of reagent may be stored adjacent to the shed to facilitate replenishment, particularly over winter. These drums should be located and stored in a manner that minimises the risk of a spill from the drums.

The transportation of reagent to and from the project should be undertaken in accordance with the required hazardous goods, traffic and transport regulations.

On site, the reagents should be transported in sealed containers, securely retained within the site vehicle. These containers should be small enough that they can be easily handled and only the expected required volume is transported.

The use of these reagents should be in accordance with the site Health and Safety Management Plan.

F2.2 Rainfall activated treatment

Rainfall activated treatment is the preferred option for treatment of sediment-laden runoff as it provides an appropriate level of dosage based on the rainfall volume and intensity.

A rainfall activated system is appropriate for most liquid reagents. The following guidance outlines best practice for the design, installation, operation and maintenance of a rainfall activated system, and provides specific details for the use of PAC as an example reagent. Alternative reagents may also be used, and the specifics of that reagent will need to be taken into consideration during the design of the system and specified in the FMP. The specifics that will need to be considered are:

- The required dose rate as determined by bench testing
- The specific gravity of the reagent in the form to be used. Many reagents will require a degree of dilution to be suitable for this system.

The device operates as follows (refer Figure 102):

- Rainfall is collected in the catchment tray and discharged to the header tank.
- The header tank provides storage capacity to avoid dosing during initial rainfall following a dry period, and to attenuate dosing at the beginning and end of a rainstorm (to simulate the runoff hydrograph). The header tank provides:
 - Zero flocculant discharge until a pre-selected quantity of rain has fallen, to allow for initial infiltration and saturation of dry ground before runoff commences
 - A slow start to the dosing rate to allow for the response time of runoff flowing off the site at the beginning of a storm
 - An extension of the dosing period beyond the rainfall period to provide treatment of runoff that occurs following cessation of rainfall.
- From the header tank, the rainwater discharges by gravity through low and high flow outlets into the displacement tank, which floats in the flocculant reservoir tank. As the displacement tank fills with rainwater, reagent is displaced through the outlet in the flocculant reservoir tank and then flows by gravity to the dosing point.

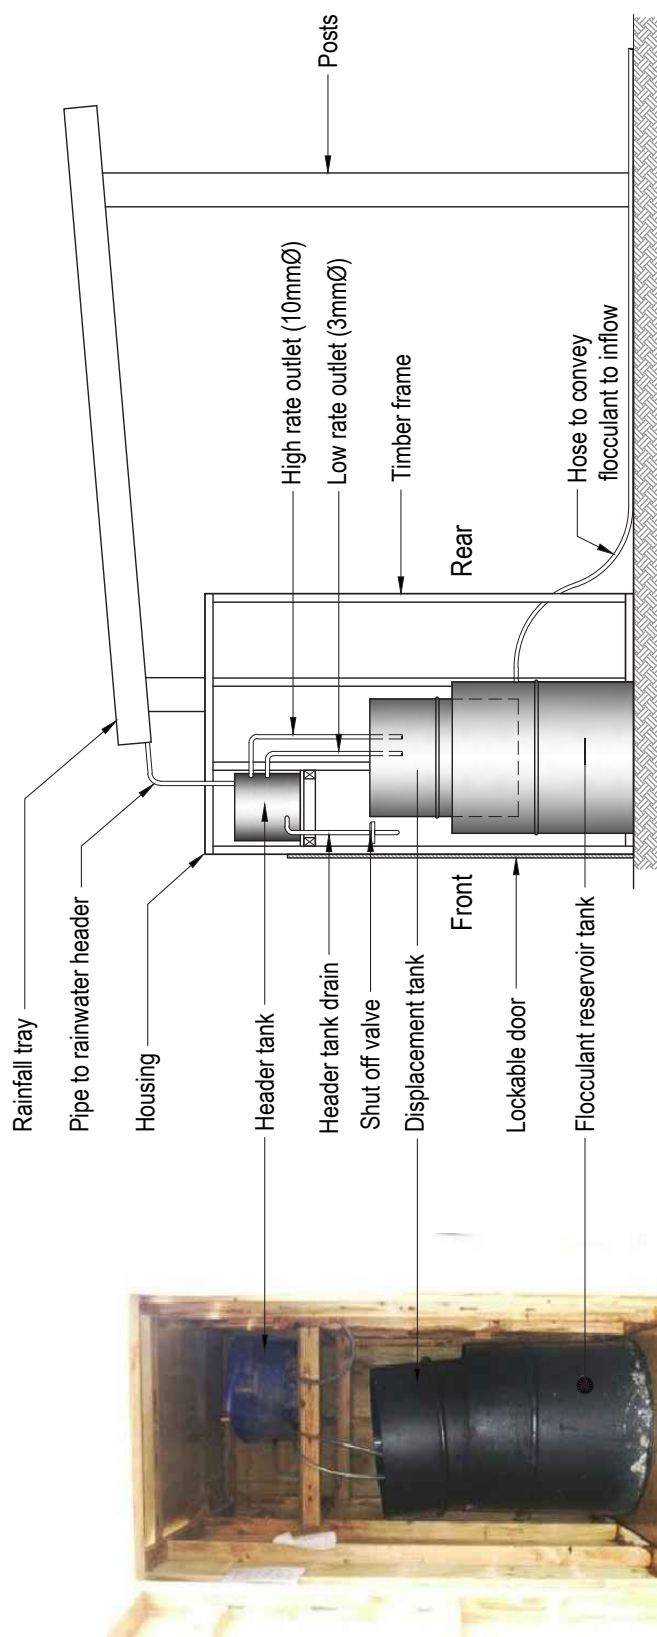


Figure 101: Rainfall activated treatment system

F2.2.1 Design

Conditions where practice applies

Treatment using a rainfall activated system is best used when using liquid reagents where any of the following apply:

- The duration of treatment is long (more than 4 weeks)
- The catchment area is greater than 0.5 ha
- Earthworks are during periods of increased rainfall (e.g. winter)
- The site is unattended for more than 24 hours.

Key design criteria

General

The main components of the rainfall activated flocculant treatment device are (refer Figure 101):

- Rainfall catchment tray
- Header tank
- Displacement tank
- Flocculant reservoir tank.

The size of the rainfall catchment tray is determined by the size of the catchment draining to the sediment retention pond. The tray is sized to provide flocculant treatment for 100% of the runoff from the exposed earthworks areas, and 60% of the runoff from the stabilised contributing catchment area. The design of the tray is set out in Figure 102.

Laboratory tests need to be undertaken using sediment-laden runoff from the site, and the optimal dose determined.

The discharge of the flocculant should be to the turbulent section of the inlet drain, to ensure the floc mixes thoroughly with the dirty water.

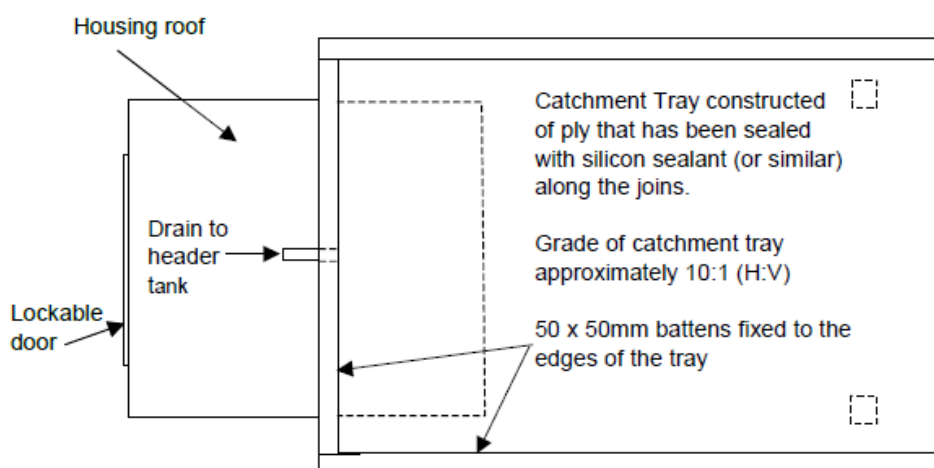


Figure 102: Rainfall catchment tray

Rainfall catchment tray

- The rainfall catchment tray (refer Figure 102) area will increase as the dosage rate or contributing area increase.
- The rainfall catchment tray area will decrease as the dosage rate or contributing area decrease.

Header tank

- The zero flocculant discharge rainfall volume can be adjusted manually for site characteristics by adding or removing water from the header tank (refer Figure 103).
- The header tank requires a drain hose as low as practical to allow the header tank to be fully emptied and or to adjust the zero discharge volume. This drain should include a valve for ease of use.
- Low rate and high rate outlets need to be installed.
- The low rate outlet consists of an outlet hose with a 3 mm orifice. The standard header tank design allows for 12 mm of rainfall before dosing commences.
- The high rate outlet consists of an outlet hose with a 10 mm orifice. The high rate outlet invert should be positioned at that point reached by a further 12 mm of rainfall.
- The slow start/attenuation characteristics can be regulated for site characteristics, if necessary, by providing more than one low rate outlet and at different levels from the header tank.
- The header tank should have a minimum freeboard of 50 mm above the top of the high rate outlet pipe.

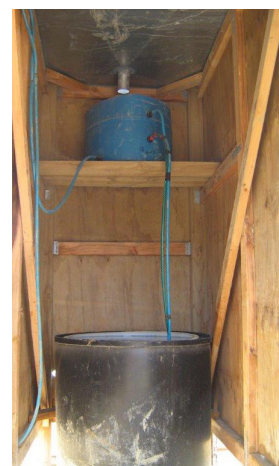


Figure 103: Header tank

Displacement tank

- The displacement tank needs to be a neat fit inside the flocculant reservoir tank. However it should not be so snug that it can jam or prevent additional flocculant from being added.
- The displacement tank should have capacity to hold runoff from the 50% AEP event.

Flocculant reservoir tank

- The flocculant reservoir tank needs to be only slightly larger than the displacement tank. The larger the reservoir and displacement tanks are, the less servicing required.
- The flocculant reservoir tank requires sufficient capacity, set by the height of the outlet hose, to provide for the dosing of runoff from the 50% AEP rainfall event.
- A 20 mm (minimum) diameter outlet hose needs to be installed in the side of the tank to drain through the side of the shed (refer Figure 104) to the pond inlet channel.
- The dosing point of the outlet into the sediment-laden diversion should be at least 5 m upstream of the forebay to promote mixing of the flocculant.



Figure 104: Flocculation shed

F2.2.2 Construction, operation and maintenance

Treatment should only be implemented under the supervision of a suitably experienced and qualified professional.

The following provides guidance on the installation, operation and maintenance of treatment systems. Specific details are also provided for the use of PAC as this is currently the most well-documented reagent within the Auckland region. Alternative reagents are also acceptable, provided the specifics of that reagent are taken into consideration during the construction of the system and are specified in the management plan.

Construction (installation)

For construction of a rainfall activated treatment system:

- The shed can be constructed of a number of materials. Timber framed plywood is the typical construction material
- Ensure that the shed is large enough to accommodate the various tanks without restricting their operation
- Ensure the shed is of durable construction. Consider lifting points or skids to allow for easy relocation
- Ensure that the shed, particularly the rainfall catchment tray, is well secured to the ground to prevent wind damage
- Ensure the shed has a lockable door for security and public safety
- Locate the shed in a location that allows servicing and maintenance in all weather conditions.

Operation and maintenance

For operation and/or maintenance of a rainfall activated treatment system:

- The maintenance requirements need to be assessed before and following every rainfall event, or during rainfall events if exceptionally heavy and/or prolonged rainfall occurs
- Before the site is left unattended for weekends or other periods, the treatment system should be serviced by the responsible site staff member so that the maximum amount of runoff can be treated by the dosing system
- The system may require some ongoing adjustment to suit the site characteristics and runoff (as explained further below).

Header tank

- The header tank is used to delay dosing during the initial stages of rainfall when site conditions are dry and no runoff is expected. The header tank also regulates the discharge of reagent to mimic surface runoff, specifically by allowing a higher outfall during heavy rainfall and by increasing the duration of discharge beyond the end of rainfall
- The volume in the header tank is lowered using the lowest of the three outlet tubes:
 - After 3 days without rain - reduce volume to 50%
 - After 6 days without rain - reduce volume to empty (level at lowest outlet)

- In wet weather, or if the site is generally wet, water may be added manually to the header tank to cut down the response time so that the system responds more rapidly after rain commences
- If the system is to be operated over the winter period, then the system should also be set to 'no delay'
- Adjusting the water level within the header tank can be used to regulate under or overdosing of the pond. Under-dosing may lead to discharge of higher levels of suspended sediment from the pond. Whereas overdosing of PAC may cause a reduction in pH, raising the potential for aluminium within the PAC to react, forming toxic aluminium compounds that are bioavailable to fresh and marine water organisms. Adjusting the water level within the header tank should only be an interim measure until further bench testing and/or tray sizing takes place.

Refilling the flocculant reservoir

- When the volume of flocculant in the reservoir tank is reduced such that there is insufficient reagent to dose a major storm, the displacement tank should be emptied and the flocculant reservoir refilled
- The displacement tank may either be emptied using a siphon, bailed out by hand or pumped. The method of emptying this tank should be considered in the design of the shed
- The flocculant reservoir is best filled using a drum pump, to pump from a 200 L drum.

Monitoring and adjusting for changing site conditions

- Each new treatment system needs to be monitored carefully during the first few rainfall events to check that the system is effective, and to check that no over or under-dosing is occurring
- Changes in catchment areas and/or soils will also require a review of the treatment system design. Minor changes can typically be accommodated through a modification of the rainfall catchment tray. More significant changes will also require a modification of the header tank
- If overdosing is suspected, because the pond dead storage water is exceptionally clear, samples must be taken from the pond for pH and residual chemical analysis. The dosing regime should be adjusted depending on the outcome of these results
- If overdosing occurs, or if it is clear that the quality of stormwater runoff is improving because of stabilisation of the site, the reagent dose must be reduced by reducing the size of the catchment tray. This can be done by placing and sealing a board (batten) diagonally across the tray with a hole through the tray rim at the lower corner, so that water from the tray area above the batten discharges to waste. Alternatively, a suitably sized piece of plywood can be placed over the lower section of the tray to reduce the tray area
- Debris (such as leaves) should also be removed from the catchment tray to ensure that rainwater enters the header tank. The low and high rate hoses need to be checked regularly for blockages. In addition, all hose fittings need to be inspected regularly to identify any leakages
- Issues such as poor treatment performance, or consistently very clear treated water, should be dealt with by consulting a suitably experienced and qualified professional for advice on an appropriate action.

Spill management

- If there is a reagent spill onto the ground, it should be immediately contained using earth bunds to prevent it entering water. When using PAC, any spilt reagent should be recovered if possible and placed in polyethylene containers. If the spilt PAC cannot be recovered, it should be mixed with a volume of soil equal to at least ten times the volume of spilt PAC. This will effectively neutralise the PAC. The soil with which the PAC has been mixed should be buried a minimum of 0.5 m below the surface
- If there is a reagent spill into ponded water, discharge from the pond to natural water should be prevented. The ponded water should then be sampled and tested to confirm if the water is safe to discharge. (For example in the case of PAC, the pH and or free aluminium concentration should be checked to make sure it is within acceptable limits.)
- If there is a spill of reagent into flowing water:
 - Auckland Council should be advised immediately
 - The volume of the spill should be recorded
 - If possible, the water and spilt reagent should be pumped into a bund or pond until all the spilt reagent has been removed from the watercourse
 - If the reagent cannot be removed from the watercourse, any downstream users should be identified and advised.

F2.3 Floc sock treatment

Floc sock treatment is generally used for smaller catchments or for short durations where the establishment of a rainfall activated system is not appropriate.

Floc sock treatment is achieved by placing a segmented geosynthetic sock filled with a dry flake form of a reagent in the dirty water diversion channel, so that dirty water runoff will flow over the floc sock, dissolving and mixing with the reagent (refer Figure 105).

F2.3.1 Design

Conditions where practice applies

Treatment utilising a floc sock system is best used where:

- The duration of treatment is short (up to 4 weeks), or
- The catchment area is smaller than 0.5 ha.

Limitations

The following limitations apply to treatment using a floc sock system.

- It is generally not appropriate for:
 - Long-term duration works (greater than 1 month)
 - Large catchments (less than 0.5 ha)
 - Earthwork areas during periods of increased rainfall (e.g. winter)
 - Sites that are unattended for extended periods (more than 48 hours).

Key design criteria

The key design criterion is to identify a reagent that:

- Will provide an appropriate increase in sediment retention efficiency
- Is not sensitive to over or under dosing in regard to efficiency
- Does not result in significant changes to pH as a result of over or under dosing.

The volume of water each sock is able to treat must also be determined, so the correct number of socks is installed to treat runoff from a 50 mm rainfall event.



Figure 105: Floc sock installed in a half round boss pipe with a concrete wing wall to divert all dirty flows over the floc sock

F2.3.2 Construction operation and maintenance

Construction (implementation)

Treatment should only be implemented under the supervision of a suitably experienced and qualified professional.

In order to provide the correct dosing, the appropriate number of floc socks should be laid within the diversion drains approximately 5 m upstream of the forebay of the DEB.

In order for the flows to have maximum contact with the socks, the socks must be placed in a defined channel, so that the socks come into contact with the full flow depth within the channel for all rainfall events up to and including the 5% AEP event (maximum flow diverted by the diversion bunds).

Floc socks should be installed in accordance with Figure 106.

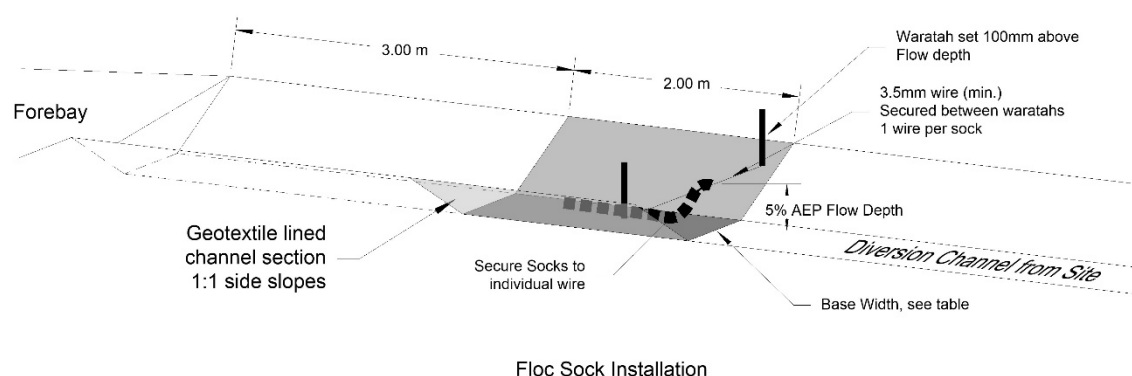


Figure 106: Installation of floc socks

Operation and maintenance

- The maintenance requirements of the floc sock treatment system need to be assessed before and following every rainfall event, or during rainfall events if exceptionally heavy and/or prolonged rainfall occurs.
- The floc socks are to be regularly checked to ensure that they remain within the area of maximum channel flow.
- The floc socks are to be regularly checked to ensure that they are not caked with or covered by accumulated sediment.

Prior to site staff leaving the site unattended for weekends or other periods, the floc socks are to be checked to ensure that sufficient reagent (floc socks) remain to control runoff from a 50 mm rainfall event.

F2.4 Batch dosing treatment

Batch dosing is largely undertaken as a reactive measure to treat impounded runoff that has not been treated to the correct standard. Batch dosing is achieved by adding the liquid reagent to the surface of impounded runoff to increase the rate of settlement to achieve the required standard of discharge.

Batch dosing may be undertaken as contingency measure in devices that have been treated by either a rainfall activated system or a floc sock system.

Batch dosing can be utilised during dewatering processes (see Section G4.2.1).

Batch dosing is not an appropriate treatment measure during rainfall.

F2.4.1 Design

Conditions where practice applies

Batch dosing is appropriate where:

- Impounded runoff has not been treated to the correct standard, or
- Sediment-laden water has been collected by pumping, or
- Impounded sediment-laden water requires pumping.

Limitations

Batch dosing is only suitable for collected runoff. It is not practical to batch dose during rainfall.

Key design criteria

Batch dosing is undertaken to impounded runoff using a liquid reagent.

The dosage rate is determined by bench testing.

The outflow from the device should be stopped until the treatment has achieved an appropriate level of control.

F2.4.2 Construction, operation and maintenance

Construction (implementation)

Treatment should only be implemented under the supervision of a suitably experienced and qualified professional.

For construction (implementation) of batch dosing:

- Raise the T-bar and block the outlet from the device prior to dosing
- Determine the volume of the impounded runoff. From the bench testing, determine the volume of reactant needed
- Add the reactant by spraying it on the surface of the device or by careful application using a bucket or other small container to evenly disperse the reactant over the surface of the device.
- The impounded water will then be mixed with the reactant using one of the following methods:
 - Mixing with a pole, paddle or oar
 - Mixing by circulating the impounded flows through a pump
 - Mixing by dragging semi-submerged floats through the surface area of the impounded water.
- Once settlement has occurred (typically 2-3 hours), check the pH and clarity within the device. If the pH is between the range of 5.5 and 8.5 and the clarity is greater than 100 mm, open the decant and drain the device
- If the clarity is less than 100 mm, add a further dose of reagent at 50% of the original rate and allow a further settlement period of 2-3 hours allowed before retesting
- If the pH levels fall outside the acceptable range of 5.5 to 8.5, seek advice from a suitably experienced and qualified professional to determine appropriate actions. This could include offsite removal of impounded water or adding alternate substances, such as sodium carbonate or sodium bi-sulphate, to alter the pH. Subject to the weather conditions at the time, and the level by which the range has been exceeded, it may be appropriate to use the impounded water for dust control.

F2.5 Decommissioning

The decommissioning of a treatment system requires removal of any remaining reagent. This should be salvaged for reuse where practical, but should not be mixed with 'fresh' reagent to minimise the potential for contamination of the fresh reagent.

All accumulated sediment must be removed and correctly disposed of.

The shed and tanks should be removed from the site and stored for reuse. (**Note:** The reuse of the treatment system will require some degree of modification to suit the specific details of the new site.)



G

Specific activities

This section outlines a number of construction activities where ESC measures need to be integrated into the works or activity. Each activity includes discussion on:

- The unique nature of the activity and the associated ESC issues
- Best practice ESC for the activity.



G1.0 Dewatering

G1.1 Unique nature of this activity

Dewatering is the removal of water from excavations, tunnelling, trenches and sediment control devices. Dewatering may be the removal of either surface water or groundwater that has collected. Dewatering is generally done by pumping. This process can generate fine textured material that is difficult to treat and retain on site, even through use of robust sediment control devices like those described in this guideline.



Figure 107: Dewatering skip bin

G1.1.1 Conditions where practice applies

Dewatering devices apply:

- To dewater trenches, excavations and low-lying areas
- To dewater sediment control devices for maintenance, or at the decommissioning stage.

G1.1.2 Limitations

Dewatering has the following limitations:

- Care must be taken when pumping, as it produces fine textured sediment that can have adverse environmental effects
- Always try to minimise the volume of water that requires dewatering. This can be done by measures such as limiting the length of the open trench or providing diversions above excavations.

G1.2 Best practice ESC for this activity

G1.2.1 Key design criteria

When dewatering, consideration must be given to the following criteria:

- Minimise the volume of water and the levels of sediment
- Retain sediment-laden water on site to maximise the settling of sediment on site (Settling may be aided by the addition of flocculant treatment.)
- Always dewater the cleaner water at the top first, then pump the residual sediment-laden water to a sediment retention device, tank or truck. This water can be used as a dust suppressant or to aid compaction
- As a minimum, 100 mm clarity is required to allow water to be discharged offsite
- Small volumes of sediment-laden water can be pumped to a silt fence or DEB; however care needs to be taken to ensure that these devices are not overwhelmed
- Larger volumes can be pumped to an SRP. Always pump to the forebay. Subject to the volumes pumped, the outlet may need to be blocked during pumping and the SRP treated following pumping.

There is a variety of options for dewatering, including turkeys nests (refer Figure 109), settling tanks/skip bins (refer Figure 107) and dewatering bags (refer Figure 108).



Figure 108: Dewatering bag and pipe sock



Figure 109: Example of a mobile 'turkeys nest' used for dewatering

G1.2.2 Construction and operation

The following should be considered when constructing and/or operating dewatering devices:

- Plan for dewatering well before it is needed. The majority of excavation works will require some degree of dewatering
- Plan and organise works and construction to minimise dewatering volumes; for example, by limiting the extent of trenching to that which can be worked and backfilled each day
- Recycle the water wherever possible (e.g. for dust suppression or earthworks conditioning)
- Pump from the top using a float or similar to keep the intake off the bottom of the excavation (the area to be dewatered). This will remove cleaner water while avoiding mobilisation of bottom sediments
- A minimum of 100 mm water clarity is required to pump directly offsite. If there is not 100 mm water clarity, the water can either be:
 - Treated in situ until the clarity is achieved and then pumped offsite
 - Pumped to a sediment retention device, tank or skip for settlement or flocculant treatment device before discharge offsite (**Note:** If pumping to a DEB or SRP, the outlet should be blocked or otherwise prevented from discharging until it has been checked that 100mm clarity has been achieved before the water is released.)
 - Pumped to a tanker and removed offsite
- Water clarity can be measured using a black target (such as a black disc). The further away the disc can be seen, the clearer the water
- Small volumes of water can be pumped via dewatering bags or pipe socks
- Larger volumes of water can be pumped to a turkeys nest for treatment prior to discharge

- Ensure that the outlet to any pumped water is not creating any erosion issues. In some cases, an energy dissipater and a stabilised area may need to be constructed to discharge the pumped flows into
- Monitoring of the discharge is critical to ensure the pumped discharge is meeting the required discharge standards at all times
- Take particular care with pumping, as it produces fine-textured sediments that are very difficult to retain on site
- Sediment retention measures are far less effective for controlling dewatering than erosion control measures (i.e. those that reduce dewatered volumes)
- Ensure that any devices that receive pumped flows are suitably sized and appropriately located. Remember that these devices can hold a significant weight of water when full
- Ensure that the outlet of any pump is securely connected or fixed to any device receiving these flows
- Dewatering requires close supervision and if not monitored has the potential go wrong fast!
- Due to the above limitations all dewatering should be undertaken in accordance with a Dewatering Plan prepared by a suitably experienced and qualified professional. This Dewatering Plan needs to include the following details as a minimum:
 - Specific dewatering procedures and methodology
 - Dosing rates and batch dosing methodology if flocculant treatment is required
 - Monitoring, and contingency measures (including a record sheet).



G2.0 Small sites

Auckland Council is preparing a small sites guide entitled 'Building on small sites – Doing it right' (to be released during 2016). This will provide specific advice on best practice ESC for small earthworks sites, such as housing/building sites.

As with all earthworks, a combination of multiple ESC practices will be required to effectively manage a small site (a 'treatment train' approach). Further detail on those ESC practices of particular relevance to small sites can be found in the following sections of this guideline:

- Erosion control practices:
 - Non-structural approaches (refer Section E1.0)
 - Clean and dirty water diversion channels and bunds (refer Sections E.2.1 and E2.2)
 - Stabilised entranceways (refer Section E2.6). (**Note:** Achieving the specifications detailed in Section E2.6 may be different on a small site. The dimensions of a stabilised entrance on a small site will be dictated by the available space. The stabilised entranceway should be designed to provide for likely vehicle movements to the site in accordance with the design purpose, and seek to achieve the outcomes detailed in Section E2.6.1.)
- Sediment control practices:
 - Silt fences (refer Section F1.3) (refer Figure 110)
 - Super silt fences (refer Section F1.4)
 - Stormwater inlet protection (refer Section F1.6).
- Specific activities:
 - Dewatering (refer Section G1.0).



Figure 110: Silt fence

G3.0 Roads and utilities

G3.1 Roads

G3.1.1 Unique nature of roading works

Large roading projects, or roads constructed at the time of a new subdivision development, are not generally space constrained. The conventional ESC methods and devices described in Sections E and F are generally applicable to these earthworks activities.

However, roading upgrades, repairs or realignments in an existing urban environment have unique challenges. ESC for such works is not always as straight forward as it is for general construction.

There are a number of aspects of roading projects that can be considered unique. These aspects include the following:

- Road projects are linear projects that may cross a number of catchments
- Roding networks can be overland flows paths and the works may alter existing drainage patterns
- Works within stormwater flow paths are immediately above, in and around stormwater inlets
- The works are constrained in the amount of space that they occupy
- The works are often undertaken within a 'live' traffic environment
- There may be numerous adjacent properties or land use activities
- The earthworks areas and volumes associated with road upgrades are often not large in any one area; however, the long and linear nature of roading projects can have a cumulative effect.

For these reasons roading construction can be more complicated from an ESC perspective relative to general construction projects.

G3.1.2 Best practice ESC for roading works

In existing urban environments there is often limited space for the construction of conventional sediment control devices. The emphasis is on utilising a 'cut and cover' methodology and stabilising exposed areas at the end of the each day's operations. Depending on the extent and nature of the works, they can often be limited to works within the subgrade or widening operations that allow for a cut to waste and replace with a stabilised product (aggregate).

Design

Consider the following points when planning and designing for roading activities:

- Plan the works so as to minimise both the extent and duration of site disturbance, particularly in high-risk areas such as close to watercourses and on slopes steeper than 18%
- Pumping groundwater and rainwater out of trenches or excavations generates sediment-laden water that can be difficult to treat in the roadway or limited berm areas. Refer to Section G1.0 for advice on dewatering
- Consider the limitations of space as a result of site-specific issues (Figure 111) including traffic management, pedestrian access, and access to commercial and residential properties
- In the urban environment, the location of buried services and the proximity of trees also can have an effect on the selection of ESC devices.



Figure 111: Progressive stabilisation in limited space

Construction and operation

Address the aspects below when undertaking roading activities:

- There is often limited space for the construction of conventional sediment controls devices. The emphasis is on utilising a “cut and cover” methodology and stabilising exposed areas at the end of the each day’s operations
- Focus on erosion control and stabilise areas as soon as possible (refer Figure 112). Consider material selection for filling operations (i.e. use of hardfill)
- Topsoil and spoil should be stockpiled separately
- Do not put stockpiles of topsoil, spoil or bedding material in overland flow paths or within 1 m of a hazard area such as kerb and channels, stormwater inlets, paved footpaths or driveways
- Any stockpiles that remain on site must be covered with a geotextile fabric at the end of each day or when rain is forecast
- Remove excess spoil and/or undercut material from the site as soon as possible, or immediately incorporate it into other works on site. Where possible, all excavated material that is not required as part of the backfill should be loaded directly onto a truck and removed offsite
- Stabilise exposed areas as soon as possible (aggregate for carriageway and footpath areas and topsoil, seed and mulch/geotextile for landscaping and berm areas)
- Backfill and compact trenches or excavations as soon as possible in an immediate and progressive manner. (**Note:** Open trenches in an existing urban environment can also represent a health and safety issue.)
- Dewatering of trenches or excavations must not pollute any stormwater system or downstream watercourse. Pump sediment-laden water to a retention device for treatment and/or removal, or direct it to a tanker for appropriate offsite disposal. Refer to Section G1.0 for more information on dewatering
- Take care with all use of lime and cement to avoid discharges into stormwater or waterbodies.



Figure 112: Use of stabilisation products and progressive stabilisation

G3.2 Utilities

G3.2.1 Unique nature of utility works

Unless correctly planned and managed, the installation of services and utilities such as electricity, gas, water, wastewater and telecommunications can result in significant disturbance to the ground surface. Soil erosion and sedimentation are common environmental impacts of trenching and dewatering of trenches.

During the development of new subdivisions, installation of utilities and services generally takes place towards the end of the bulk earthworks phase. Trenching works may, therefore, traverse areas that have already been stabilised, and in some cases, areas where sediment control measures have already been decommissioned. The trenches are often long and can cut across different water catchments.

In addition, utilities are consistently being upgraded or installed across the existing urban environment within the city's berms and road reserves.

Earthworks associated with the installation of utilities are usually fairly minor in any one area, but can create a cumulative effect. The works are often undertaken along roads and close to stormwater inlets. Pumping groundwater and rainwater out of trenches generates sediment-laden water that can be difficult to treat in the roadway where these works are usually done. Refer to Section G1.0 for advice on dewatering.

G3.2.2 Best practice ESC for utility works

Design

Consider the following points when planning and designing for installation of utilities:

New subdivisions

- Install reticulation systems for water supply, stormwater and wastewater services and for other services and utilities at the same time as the road works.
- Co-ordinate installation of services and utilities with all relevant service providers and authorities, and where possible, use common trenching.
- Make sure that trenching operators working on a larger site are aware of the ESC Plan for the site overall. They should also understand that they must comply with its provisions as well as with any specific ESC requirements for their work.
- Trenching across flowing streams or watercourses should be avoided. Use an alternative methodology such as directional boring or aqueducts in these situations.
- In areas where ephemeral water is likely to concentrate, a dam should be created above the site with sandbags or similar. Then the works can commence and the surface reinstated with a stabilised surface.

- Plan the works so as to minimise both the extent and duration of site disturbance, particularly in high-risk areas such as close to watercourses and on slopes steeper than 18%.
- When trenching is completed independent of other activities on site, plan for progressive stabilisation and/or restoration of disturbed areas.
- Trenches should not be open for any longer than three days; complete the stabilisation of all disturbance in high-risk areas within two days of backfilling, and within five days in all other areas.

Existing urban environments

- There is often limited space for the construction of conventional sediment control devices. The emphasis is on utilising a “cut and cover” methodology and stabilising exposed areas at the end of each day’s operations.
- Do not trench across flowing streams or watercourses. Use an alternative methodology such as directional boring or aqueducts in these situations.
- Plan the works so as to minimise both the extent and duration of site disturbance, particularly in high-risk areas such as areas close to watercourses and on slopes steeper than 18%.
- When trenching has been completed independent of other activities on site, plan for progressive stabilisation and/or restoration of disturbed areas.
- Trenches should not be open for any longer than possible; complete the stabilisation of all disturbed areas in an immediate and progressive manner. (**Note:** Open trenches in an existing urban environment can also represent a safety issue.)



Construction and operation

Address the aspects below when installing utilities (also refer Figure 113 below):

- If trenching works affect pre-existing ESC measures, those measures must be carefully removed and then immediately reinstated at completion of the works.
- Additional ESC contingency measures will usually be needed for the duration of trenching activities, and until the original measures are reinstated or replaced.
- Where practicable, plan and undertake works in appropriately sized stages so that trenching is not open for a period longer than three days, and can be stabilised within the range specified above.
- **Do not** open trenches when there is a risk of high rainfall. (**Note:** An open trench becomes a diversion drain; consider where it will discharge.)
- Divert above-site water away from work areas with temporary diversion drains (refer Section E2.1); **Do not** allow the trench excavation to concentrate or convey runoff.
- Topsoil and spoil should be stockpiled separately on the up-slope side of the trench.
- **Do not** put stockpiles of topsoil, spoil or bedding material in overland flow paths or within 1 m of hazard areas such as kerb and channels, stormwater inlets, paved footpaths or driveways.
- Minimise soil loss by protecting all stockpiles with covers such as geotextile fabric.
- Remove excess spoil and/or bedding material from the site as soon as work is completed, or immediately incorporate into other works on site.
- Backfill and compact trenches within three days and stabilise the area as soon as possible.
- Dewatering of trenches must not pollute any stormwater system or downstream watercourse; pump sediment-laden water to a sediment retention device or to a tanker for appropriate offsite disposal. Refer to Section G1.0 for more information on dewatering.

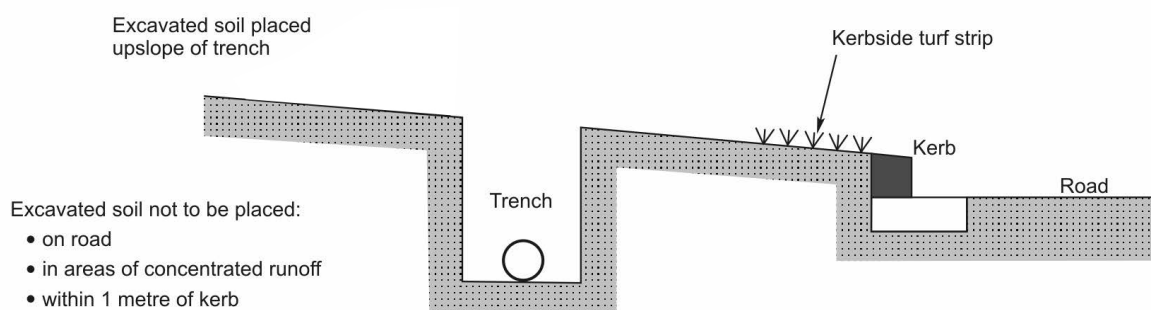


Figure 113: Typical trenching methodology

G4.0 Works within a watercourse

G4.1 Unique nature of this activity

Works in or around streams have the potential to have a direct impact on watercourse habitat (e.g. by habitat disturbance or destruction) and on watercourse ecology (such as through sediment and temperature related effects).

Great care is therefore required for works in and around watercourses to minimise potential effects as much as possible. Where this is unavoidable, specific construction methodologies and control measures are required to minimise potential adverse impacts. For guidance on fish relocation or fish passage issues please refer to Technical Publication 131 (TP 131) – *Fish Passage Guidelines for the Auckland Region*, June 2000.



Figure 114: Temporary stream diversion to allow for the installation of a new culvert

G4.2 Best practice ESC for this activity

Permanent crossings must be constructed in accordance with all relevant design and regulatory requirements.

When considering temporary works in watercourses, there are a number of different activities that need to be considered:

- Temporary watercourse crossings
- Dam and pump or dam and divert
- Temporary watercourse diversions (refer Figures 114 and 115).

G4.2.1 Temporary watercourse crossings

Temporary watercourse crossings comprise temporary culverts or bridge structures installed across a watercourse for short-term use by construction vehicles.

Temporary watercourse crossings provide a means for construction vehicles to cross watercourses without moving sediment into the watercourse or directly affecting the streambed, generally while the new permanent crossing is installed.

Design

The following design criteria apply to this practice:

Location

If a watercourse crossing is required, select a location where the potential effects of the crossing (including construction) are minimised. That is, the ESC measure should be located in a section of the watercourse that is proposed to be modified as part of the permanent design.

Timing

Plan watercourse crossings well before you need them. Construct them during periods of dry weather and outside fish migration seasons (unless other timing is stated in a resource consent condition). The Department of Conservation and Fish and Game New Zealand can help identify these periods for particular watercourses. Complete construction as rapidly as possible and stabilise all disturbed areas immediately during and following construction.

Bridges

Where available materials and site conditions are adequate to bear the expected loadings, bridges are preferred over culverts (refer Figure 116). Bridges provide less obstruction to flow and fish migration, cause little or no modification of the bed or banks, and generally require little maintenance.

However, bridges can be a safety hazard if not designed, installed and maintained appropriately. Specific engineering design is required for all bridge structures.

Typically, control measures are placed between any soil disturbance needed to build the bridge or abutments and the stream channel. The control measures might consist of a super silt fence (refer Section F1.4) or bunds that drain to a DEB (refer Section F1.2).



Figure 115: Stabilised clean water diversion and temporary culvert to divert streamflows while a new culvert is being constructed



Figure 116: A temporary bridge in the process of being installed

Culvert crossings

Culverts are the most commonly used type of temporary watercourse crossing, and can be easily adapted to most site conditions (refer Figure 117). The installation and removal of culverts however, causes considerable damage to watercourses and can also create the greatest obstruction to flood flows and fish passage. As far as practicable, the temporary culvert should be located in a section of the watercourse that is to be modified as part of the permanent design (i.e. a section of stream that may be filled as a result of a new culvert crossing).

When installing a temporary culvert, sizing is important as stormflows could cause erosion or overtop the culvert causing failure of the temporary access.

For temporary stream crossings the cross-section of the culvert should be sized for approximately 85% of the channel cross-section.

Scour protection is also required to ensure the integrity of the crossing in the event of overtopping to ensure minimal adverse impacts.

Consideration must be given to overland flowpaths to ensure that larger flows do not cause excessive safety or environmental impacts. This will typically include confirming that, in larger floods, there is no increase in flood level upstream (up to the 1% AEP storm in flood sensitive areas).

Even though culverts are temporary, there is a need to ensure that fish passage is not impeded in permanent streams (refer to TP131 for details).

As well as ESC measures, structural stability, utility and safety must also be taken into account when designing temporary watercourse crossings. In addition, consents are likely required for the construction of the proposed crossing. Auckland Council planning staff can assist in this determination. Any temporary crossing must comply with the conditions of consent or the Auckland Council Planning Rules.

Streamflows will need to be diverted during the installation of the temporary culvert to ensure that the works can be undertaken in dry conditions. Refer to Sections G4.2.2 and G4.2.3 below for methodologies to complete streamworks in dry conditions.

Maintenance and decommissioning

Inspect temporary watercourse crossings after rain to check for blockage in the channel, erosion of the banks, channel scour or signs of instability. Make all repairs immediately to prevent further damage to the installation.

When the structure is no longer needed, remove the structure and all material from the site. This will largely be undertaken as a reverse of the installation methodology. Streamflows will need to be diverted while the removal and reinstatement of the stream is underway. Refer to Sections G4.2.2 and G4.2.3 below for methodologies to complete stream works in the dry.

Immediately stabilise all areas disturbed during the removal process by revegetation or artificial protection as a short-term control measure. Keep machinery clear of the watercourse while removing the structure.



Figure 117: In the process of constructing a temporary crossing

G4.2.2 Dam and pump or dam and divert devices

A dam and pump or a dam and divert are temporary practices used to convey surface water from above a construction activity downstream of that activity (refer Figure 118).

These diversion methodologies will assist in providing dry working conditions for culvert installation. Damming a stream and pumping the flows around the worksite back to the stream considerably minimises disturbance relative to constructing a new diversion channel. With high flow streams, diversions are sometimes the only option; however with most small streams, damming and pumping are less harmful to the environment and relatively simple to carry out. The dam is also essential to temporary waterway diversions that are discussed below in Section G4.2.3.

Design

For this practice, a dam is constructed across the stream with stabilised materials such as sand bags, sheet metal plate or other suitable construction materials. A pump is installed in the dam and sufficient hose length must be available to reach below the extent of in-stream works (refer Figure 119). The pump inlet should be placed in a drum with holes to minimise the possibility of sucking sediment from the bottom of the dam. Inclusion of a fish screen is recommended. The outlet should be directed to a stabilised area with an energy dissipater such as rip-rap boulders or similar.



Figure 118: Water being diverted past a construction works area

A dam and pump methodology can only be used for works with a short duration or where the site can be stabilised at the end of each work day, so that flows can continue through the stream channel. Generally, it is not considered appropriate to implement a dam and pump methodology where the pump is required to be operating day and night for the duration of the operation (due to noise and pump reliability issues).

Sizing of the pumped diversion for a given storm event depends on the duration of the stream diversion. As a minimum, the temporary pumping should be sized for a one year peak discharge from the contributing catchment. These design parameters are based on the assumption that full channel 5% AEP (20 year) capacity is made available overnight or when storm events are predicted.

Construction and operation

Consider the following when construction and/or operating these devices:

- The dam must be capable of holding back the incoming flows
- The pump must be capable of conveying the flows, as overtopping the dam will cause environmental and construction issues with flows passing through the work site.



Figure 119: Commencement of over pumping to allow for in-stream works

G4.2.3 Temporary watercourse diversions

These are short-term watercourse diversions that allow work to occur within the main watercourse channel under dry conditions (refer Figure 120).

Temporary waterway diversions enable in-stream works to be undertaken without working in wet conditions and without moving sediment into the watercourse.



Figure 120: Temporary stream diversion installed to allow permanent culverts to be installed off line

Temporary watercourse diversions are used as temporary measures to allow any works to be undertaken within permanent, intermittent and ephemeral watercourses.

Design

These measures seek to divert all flow via a stabilised system around the area of works and discharge it back into the channel below the works to avoid scour of the channel bed and banks. Figures 121 to 124 show the suggested steps to minimise sediment generation and discharge from works within a watercourse.

Step 1

The diversion channel should be excavated leaving a plug at each end so that the watercourse does not breach the diversion.

Size the diversion channel to allow for a 5% AEP rain event, but consider the implications for secondary flow paths and upstream flood effects of having a larger event, up to 1% AEP

The diversion channel should be appropriately stabilised to ensure it does not become a source of sediment. Suitable geotextile cloth (as discussed in Section E3.5) should be anchored in place to the manufacturer's specifications, which will include trenching into the top of both sides of the diversion channel to ensure that the fabric does not rip out.

Once the channel is stabilised, open the downstream plug to allow water to flow up the channel, keeping some water within the channel to reduce problems when the upstream plug is excavated. Then open the upstream plug, allowing water to flow into the channel.

Step 2

A non-erodible dam should be placed immediately in the upstream end of the existing channel. The dam should be designed as specified in Figure 123. Where a compacted earth bund is used, it must be stabilised with an appropriate geotextile pinned over the upper face and adjacent to the lower face for scour protection. In most cases, sandbag dams can be used to construct the dam. If there is a need to relocate fish trapped in the existing watercourse as a result of the diversion, please refer TP131.

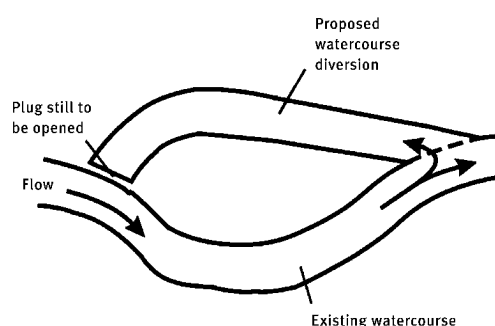


Figure 121: Diversion channel prior to plug removal

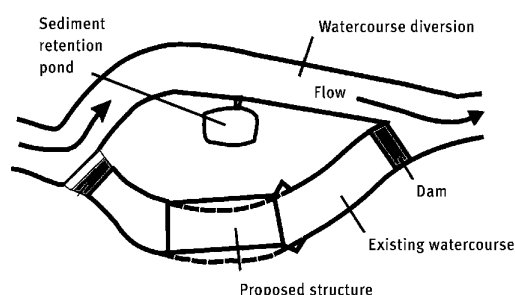


Figure 122: Dewatering construction area into a sediment pond

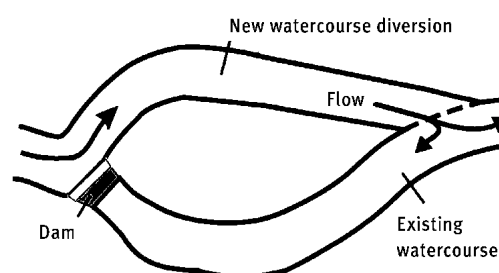


Figure 123: Opening up bypass channel and closing off existing one

Step 3

A non-erodible downstream dam should then be installed to prevent backflow into the construction area. The existing watercourse is then drained by pumping to an SRP, where the ponded water can be treated before it re-enters the live section of the watercourse. The structure and all channel work are then completed.

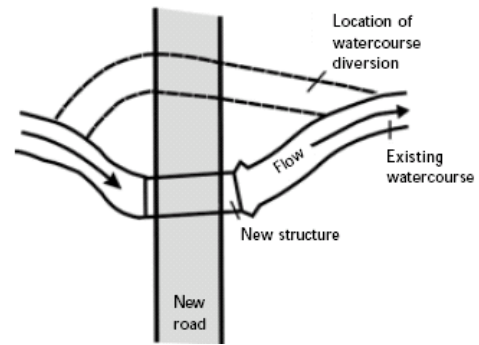


Figure 124: Re-establishment of flow in original channel

Step 4

The downstream dam should be removed first, allowing water to flood back into the original channel. The upstream dam is then removed and both ends of the diversion channel are filled in with non-erodible material. Any sediment-laden water should be pumped to an SRP or dewatered (refer Section G1.0). The remainder of the diversion channel should be filled in and stabilised.

Coffer dam diversions

In some circumstances, partial diversion of a watercourse is required to allow for the construction of outfall structures or stream bank retaining works. In these situations, a coffer dam may be used to create a dry working environment to complete the works (refer Figure 125).

The coffer dam will generally be constructed within the streamflows. As such, it needs to be of non-erodible material such as sand bags, sheet piles or similar. Once complete, the water retained by the coffer dam within the work area is pumped out to provide the dry working area. Any dirty water within the coffer dam during the works will need to be pumped to a sediment retention device (refer Section G.10 – Dewatering).



Figure 125: Sandbag coffer dam installed to complete stormwater outfall

The coffer dam design will need to assess the height of water to be diverted including any likely increased flows within the construction period.

Maintenance

Any works within a watercourse will require ongoing and vigilant maintenance to minimise sediment generation. To achieve this, identify and correct any signs that may indicate a potential problem. Take particular notice of the following signs and make repairs immediately:

- The geotextile lining ripping
- Scour occurring where the flow re-enters the channel
- Undercutting of the diversion lining.

G5.0 Works within the coastal marine area (CMA)

G5.1 Unique nature of this activity

The CMA includes the foreshore and seabed below mean high water spring tide (MHWS). The physical and chemical nature of the marine environment is different to dry land or a freshwater body. Some of the key points of difference that affect the management of ESC in the CMA are the following:

- Marine earthwork sites are often subject to tides or tidal currents. This may allow access to the inter-tidal areas, so works can be staged in low tide conditions
- Earthworks in the marine environment typically take place adjacent to land. (**Note:** Dredging and associated disposal activities are beyond the scope of this guideline.) The degree of exposure of the site to waves and tides will influence the potential effects and the ability to practically contain sediment discharges
- Marine sediment has different physical and chemical properties to the sediment that is freshly eroded from catchments. That sediment is known as 'terrigenous sediment' (derived from land), and typically comprises fine clay particles. Marine sediments are typically more porous and therefore well oxygenated. Because of the rubbing together of marine particles, their edges are not as sharp as terrigenous particles. As a consequence, the effects of marine sediments on marine biota are less adverse than effects of terrigenous sediment
- Salt water is a natural flocculant for sediment (clay particles) derived from the land and can limit the spread of clay sediments
- Traditional ESC measures are generally not appropriate for coastal works.

Earthworks in the CMA typically include activities that disturb the foreshore or seabed such as:

- Reclamation
- Coastal erosion protection works construction (e.g. seawall construction)
- Piling and abutment construction for wharves and bridges
- Construction of stormwater outfalls
- Trenching for pipelines and cables.

Works within the CMA will typically require a resource consent. The application for this consent will need to address the potential environmental effects and how these will be mitigated. The fundamental principles of ESC, such as timing and staging of works, and isolating the earthworks site from clean water while minimising the discharge of dirty water, also apply to works in the CMA.

Applicants shall discuss all proposed works with Auckland Council in order to address potential impacts in the CMA.

G6.0 Quarrying

G6.1 Unique nature of this activity

Quarries can present a major source of sediment, with activities such as overburden removal and aggregate handling identified as higher-risk tasks. Quarries are often long-term operations, with a point-source discharge from the site. Sediment-laden discharges from quarries have the potential to affect receiving water quality if they are not adequately managed.

The following quarry activities can cause sediment generation, and are addressed in more detail below:

- Road establishment and access (including watercourse crossings)
- Overburden removal and disposal
- Quarry-product stockpile management
- Traffic management (tracking sediment onto public roads)
- Rehabilitation of worked out/completed areas.

This section of the guideline provides a series of prompts to help quarry operators and their advisors understand and assess options for ESC. It should be read and implemented having regard to the principles of ESC (Section A2.0) and Sections E and F of this guideline, which detail specific ESC practices.

G6.2 Best practice ESC for this activity

G6.2.1 Quarry access

Many quarries in the Auckland region are serviced by all-weather metal roads. Establishing these roads and their use can generate a lot of sediment. Watercourse crossings need to be authorised as a permitted activity or by a resource consent. Quarry access roads are not always within the designated quarry area, but their maintenance and upkeep should be addressed in the Quarry Management Plan.

Standard ESC principles and planning (refer Section A2.0) apply to the construction of access tracks or roads. ESC measures need to be used where sediment is generated from the use of these tracks (refer Part 2, Sections E and F). Typical measures include the use of rock check dams in road-side drains (Section E2.4), and diversion of the dirty water to a SRP (Sections E2.2 and F1.1) or decanting earth bund (DEB)(Section F1.2). Truck wash bays and run-out areas may be needed to ensure sediment is not tracked onto public roads. Where possible, incorporate site access into the Quarry Management Plan, including details of all maintenance requirements.

G6.2.2 Managing clean and dirty water

Refer to the key principles of ESC (refer Section A2.0) when developing the Quarry ESC Plan. Keep as much water clean as possible. This can be achieved by limiting the exposure of erodible surfaces and ensuring all dirty water is diverted to suitable treatment devices prior to discharge.

Clean water

Divert all clean (up-slope) water away from working and bare areas, if possible, to prevent it from entraining sediment. This reduces the volume of contaminated runoff to be managed and treated. Channels to divert clean water around the working site, as outlined in Section E.2.1, are often the best means of managing these flows. Plan for these channels to be relocated, in the event that the quarry footprint changes over time.

Sediment-laden water (quarry water runoff)

Any runoff from bare soil areas, rock processing and aggregate wash processes must be managed and treated appropriately before discharge to the receiving environment. The ESC Plan should detail the methods for sediment control (refer Section F). Particular attention should be given to sensitive areas such as permanent watercourses, watercourse crossings (refer Section G4.0) and steep areas.

Due to the texture of Auckland soils and fine particles generated from quarrying activities, SRPs with flocculant treatment are likely to be the most successful and reliable method of treating and retaining sediment (refer Sections F1.1 and F2.0), especially for sites with a water quality discharge standard. Ensure the structural integrity of any SRP is carefully planned for and fully engineered.

Similarly to clean water management, proactively plan for managing flows to SRPs and associated water treatment (such as a flocculation plant), in the event that the quarry footprint/sediment pond catchment changes over time.

Ensure that, where catchment areas are anticipated to increase, the SRP is either initially constructed for the greatest anticipated catchment, or that there is sufficient space to allow the SRP to be enlarged.

G6.2.3 Overburden removal and disposal

Overburden is the material that lies above the targeted rock or mineral resource. Overburden removal and disposal activities are generally the same as earthworks cut and fill operations and should comply with normal earthworks requirements. The ESC principles in Section A2.0 should be adhered to, with detailed ESC Plans prepared and implemented prior to and during the operation.

G6.2.4 Quarry product handling and stockpiling

Quarry product handling and stockpile areas can be a major source of sediment-laden runoff if not properly controlled. Incorporate these areas into the Site ESC Plan.

G7.0 Agriculture (farm tracking)

The construction and maintenance of farm tracks will generally require earthworks. While the volume of these earthworks will generally be low, as with all earthworks, the potential and/or actual effects of erosion and sediment discharge need to be minimised. The general principles of ESC in Section A2.0 should be applied to all farm tracking earthworks.

In addition, the following sections of this guideline provide further reference for ESC practices appropriate for use during farm tracking:

- Erosion control practices:
 - Non-structural approaches (refer Section E1.0)
- Sediment control practices:
 - Decanting earth bunds (refer Section F1.2 and Figure 126)
 - Silt fences (refer Section F1.3)
- Specific activities:
 - Works within a watercourse (refer Section G4.0).



Figure 126: Decanting earth bund and diversion bund installed during a farm track construction

G8.0 Soil binders

G8.1 Unique nature of this activity

Soil-stabilising agents (also known as soil binders) are used to form a cohesive membrane or protective crust that reduces windblown dust generation.

The purpose of soil binders is to prevent or reduce the movement of dust from disturbed soil surfaces that may create health hazards, traffic safety problems and offsite damage. Soil binders may also reduce the effect of raindrop erosion and therefore, minimise sediment runoff. However, the effectiveness of their use for this purpose has not yet been verified.

Soil binders may be liquid or powdered products, either organic (such as guar, latex or various other timber resins) or chemical (such as acrylic copolymer or anionic bitumen emulsions or cementitious gypsum- or lime-based products). Soil binders are used to provide short-term protection of stockpiles, steep or relatively unstable slopes, compound areas, and inactive haul roads, etc. Some soil binders may also be included in hydroseeding or hydromulching operations to tack seed and/or wood fibre to the soil surface on steep slopes. A granular form of calcium or magnesium chloride may also be used to absorb atmospheric moisture and suppress dust on active haul roads and access tracks.

Soil binders can be used anytime where protection of the soil surface is desired; although the following conditions are generally applicable:

- Use soil binders and chloride dust suppression agents where short-term protection is required – generally for less than 6 months
- Use soil binders and chloride dust suppression agents where almost instant dust protection is required
- **Do not** use soil binders where the established soil crust is likely to be damaged
- **Do not** use soil binders or chloride dust suppression agents in areas of concentrated flow or in areas where periodic inundation is likely to occur
- **Do not** use soil binders or chloride dust suppression agents immediately next to streams or other water bodies.

The following limitations apply to soil binders:

- If managed well and as part of a treatment train approach to site management, soil binders can provide good dust control and may also reduce the effect of raindrop erosion. However, the use of soil binders does not constitute stabilisation of the site. Sediment controls will still need to be retained until the site has been stabilised (i.e. vegetated, sealed, or covered with aggregate or cloth)
- For soil binders to be effective, their surface crust must remain intact. Keep construction equipment and site vehicles, pedestrians, wildlife and/or livestock out of all treated areas
- Hardy colonising species, such as woody weeds, can break through the crust
- Anionic bitumen emulsions, some acrylic copolymer emulsions and chloride dust suppression agents have the potential to pollute some sensitive receiving waters. Generally, these should not be used immediately next to streams or waterbodies. In some areas, the use of bitumen emulsions may conflict with established community perceptions.

G8.2 Best practice ESC for this activity

G8.2.1 Design

There is no formal design procedure for soil binders, and products on the market are changing all the time. The following general principles should be followed:

- Confirm with Auckland Council which products are acceptable for use. All use of soil binders or products should be undertaken in accordance with a documented Soil Binder Management Plan (SBMP)
- Follow the manufacturer's recommendations for application rates and procedures.

G8.2.2 Construction, operation and maintenance

Construction and operation

For application of soil binders, follow the following procedure;

- Intercept up-slope runoff water and divert it around areas to be temporarily stabilised with soil binders
- Follow the manufacturer's recommendations for the correct application procedure
- Best results are obtained on friable soils. If necessary, lightly scarify the soil to allow the binder to fully permeate the soil surface. (**Note:** Adding a wetting agent may also help this)
- Soil binders are generally mixed with water before application. Stir or shake powdered products
- Apply the solution over the area to be protected via the spray bar on a water cart, a hose with a fine spray nozzle, or through the cannon on a hydroseeder unit
- Establish temporary exclusion zones around areas treated with soil binders and clearly identify and/or signpost these. Discuss exclusion zones in routine toolbox meetings and at site inductions.

Maintenance

Inspect soil binders after each rainfall event or periods of excessively strong winds. In addition inspect weekly and:

- Check for damage to the soil binder membrane caused by earthmoving equipment, construction vehicles, slips or slumps, inundation, ultraviolet degradation, livestock, wildlife or vandalism (motorcycles, four-wheel drives, etc.)
- Repair any damaged areas immediately by reapplying the soil binder, or by covering the damaged areas with a temporary mulch or blanket
- If necessary, erect temporary barrier fencing and/or signage to restrict uncontrolled movement of equipment and vehicles onto treated areas
- Check soil binding agents have not been removed by excessive traffic movements, track runoff during wet conditions, routine grading or other haul road maintenance activities
- Reapply as required to minimise dust generation.

G9.0 Dust control

G9.1 Unique nature of this activity

Dust control comprises the control of dust movement on construction sites. The purpose of dust control is to prevent or reduce the movement of dust from disturbed soil surfaces that may create nuisance, health hazards, traffic safety problems and/or offsite damage and discharge to the environment (refer Figure 127).

This activity is applicable to areas subject to dust movement, where on and offsite damage or nuisance is likely to occur if dust is not controlled. Areas subject to dust movement include open earthworks areas exposed to wind, stockpiles of materials, bulk materials handling or vehicle movements.

The effectiveness of dust control depends on moisture content and particle size of the soil or material, temperature, humidity and wind velocity/direction.

The availability of sufficient water is also critical to effective dust control. This is required to maintain the moisture content of surfaces and materials.



Figure 127: Forward planning and management to minimise dust provide the best options for control



Figure 128: Dust suppression using a water cart

G9.2 Best practice ESC for this activity

G9.2.1 Design

Dust control should be considered early in the planning stages of any earthworks project. Forward planning and management to minimise dust problems provide the best options for control. If dust management is only addressed after it has become a problem on site, it is very difficult to bring under effective control until the site has been stabilised.

The following methods for dust control apply:

Water sprinkling

This is the most commonly used dust control practice. Water is normally applied for dust suppression via a water cart or sprinkler system (refer Figures 128 and 129). Either system requires a minimum amount of water to achieve effective dust control.

The Ministry for Environment's (2001) *Good Practice Guide for Assessing and Managing the Environmental Effects of Dust Emissions* recommends 1 litre/m²/hour (or 1 mm/m²/hour) of water is available on-site for this purpose. This is, however, generally considered conservative. Generally, the minimum amount of water that should be available on site is 5 mm/m²/day. This should be applied incrementally so the ground surface remains moist.

Water carts can carry various volumes; however their use is limited by the ability of the vehicle to access the areas that require wetting.

A sprinkler system may also be used where large areas are open or where the terrain is too steep for water carts. Sprinkler systems may also be used where irrigation is useful to establish vegetation following earthworks completion.

A reliable source of water is required. This can be sourced from sediment retention ponds or authorised water takes (e.g. bore, stream, lake or municipal water supply). Approval is required from Auckland Council to take from these supplies.

Soil binders

Soil-stabilising agents (also known as soil binders or polymers) can be used to form a cohesive membrane or protective crust that reduces windblown dust generation (refer Figure 130).

Follow the manufacturers' recommendations for suitability of products for each situation, application rates and procedures.

Further detail on soil binders is provided in Section G8.0.



Figure 129: Snow blowing machine to provide dust control during a liming operation



Figure 130: Dust suppression using soil binders/polymers

Mulching, grass establishment and gravelling (progressive stabilisation)

Refer to Sections E3.4 and E3.3 for the specifications on mulching and grass establishment.

Surface mulching can be used as a temporary mulch (e.g. straw) to cover stockpiles, or other areas not worked for an extended period. Otherwise it can be progressively applied in conjunction with permanent revegetation works. Site coverage can be extended to include gravelling of compound areas, haul roads and access tracks.

Temporary vegetative cover can be used on stockpiles or other areas not worked for an extended period. Otherwise, permanent vegetative cover can be progressively applied to completed areas. Vegetation will reduce wind velocity at ground level and stabilise the surface.

Geotextiles

Geotextiles are discussed in detail in Section E3.5. Geotextiles can be used as a temporary cover (e.g. geotextile fabric) on stockpiles, or partially completed batter slopes. Otherwise, they can also be used as a permanent cover (e.g. vegetation promotion blanket) on completed areas.

Management practices

For a full description of recommended management practices for controlling dust refer to the Ministry for the Environment's (2001) *Good Practice Guide for Assessing and Managing Dust*. Common practices include:

- Minimising the area of soil exposed to the wind by staging works across the site
- Limiting traffic to established haul roads and minimising travel distances by optimising site layout
- Controlling vehicle speeds
- Maintaining the surface of roads
- Minimising track out of dirt on vehicle wheels onto paved surfaces
- Minimising drop heights when loading and unloading vehicles
- Limiting the height of stockpiles
- Providing shelter from the wind for stockpiles
- Consolidating loose surface material.

G9.2.2 Construction, operation and maintenance

Construction and operation

The following specifications apply to installing dust controls:

- During periods of low moisture conditions, apply enough water to prevent dust generation without causing runoff (refer Figure 131)
- Once areas are damp enough to prevent dust generation, regularly apply enough water to replace that lost through evaporation. This will often be an ongoing operation
- Where dust suppressants, 'sealing off' areas or isolating areas are used as control measures, adequate controls are needed to isolate these areas from construction traffic or activities. This may include fencing, signage or bunding.



Figure 131: Water truck dampening down the works area

Maintenance

For maintenance of dust controls:

- As a minimum, monitor dust emissions on a daily basis. In windy, dry conditions, review dust emissions continuously
- Reapply water as required to effectively manage levels of dust generation, especially when soil moisture conditions become low during hot and windy conditions (refer Figure 132).



Figure 132: Regular wetting of the haul road





Appendices

APPENDIX A:
References

APPENDIX B:
Glossary and
abbreviations

APPENDIX C:
ESC construction
quality checklists

APPENDIX D:
Recommended
line types and
symbols

APPENDIX E:
ESC site plan /
drawing examples





A

References

Auckland Council. (2012). The Auckland Plan.

Auckland Council. (2013). Regional Plan: Air, Land and Water.

Auckland Council. (2013). The Proposed Auckland Unitary Plan.

Auckland Regional Council. (1999, and 2007 update). Erosion and Sediment Control Guidelines for Land Disturbing Activities in the Auckland Region. Technical Publication Number 90.

Auckland Regional Council. (2001). Regional Plan: Sediment Control.

Environment Canterbury. (2007). Erosion and Sediment Control Guideline 2007 – a better way of managing earthworks and the environment.

NZ Transport Agency. (2014). Erosion and Sediment Control Guidelines for State Highway Infrastructure.



B

Glossary and abbreviations



Term/abbreviation/ acronym	Description
m ²	metre square
m ³	cubic metre
<	less than
>	greater than
%	percentage
ACDP	Auckland Council District Plan
ACRP:C	Auckland Council Regional Plan: Coastal (2004)
ACRP:SC	Auckland Council Regional Plan: Sediment Control (2001)
anti-seep collar	A projecting collar built around the outside of a pipe, tunnel, or conduit under or through an embankment dam to lengthen the seep path along the outer surface of the conduit.
ARPS	Auckland Council Regional Policy Statement (1999)
AEP	annual exceedance probability
ASTM	American Society for Testing and Materials
batch dosing	Application of flocculant (during flocculant treatment) in a single dose, rather than through a continuous flow proportional dosing system).
check dam	A small, often temporary, dam constructed across a swale, drainage ditch, or waterway to counteract erosion by reducing water flow velocity.
flocculant treatment	A sediment control practice that involves the addition of reagents to sediment-laden runoff to increase the rate of settlement of fine soil particles. Flocculant treatment relies on two basic processes: 'coagulation' and 'flocculation'.
clean water	Water runoff that is free of sediment or pollutants. In an ESC context this usually refers to water from above a work site that has not run through the works area.
CMA	Coastal marine area
coagulation	Coagulation is an important process for flocculant treatment. It is most effective where soils have a high proportion of colloidal particles. These particles typically have a negative electrostatic surface charge. These 'like charged' particles tend to repel each other, preventing coagulated particles from forming, such that the particles remain in suspension. By adding a reagent that develops positive charges the colloidal material is destabilised, allowing the particles to clump together (coagulate) forming larger heavier particles.

Term/abbreviation/ acronym	Description
coffer dam diversion	Partial diversion of a watercourse through use of non-erodible materials such as sand bags, sheet piles or similar, to allow for the construction of outfall structures or stream bank retaining works. In these situations, a coffer dam is used to create a dry working environment to complete the works.
contour drain (cutoff)	Temporary excavated channels or ridges, or a combination of both, that are constructed slightly off the slope contour. The purpose of a contour drain is to break overland flow that is draining down disturbed slopes, by reducing the slope length, and thereby reducing the erosive power of runoff. The drain also diverts sediment-laden water to appropriate controls via stable outlets.
CPTED	Crime Prevention Through Environmental Design
CTMP	Chemical Treatment Management Plan
dam and pump or dam and divert devices	Temporary practices used to convey surface water from above a construction activity downstream of that activity. These diversion methodologies will assist in providing dry working conditions for culvert installation. Damming a stream and pumping the flows around the worksite back to the stream considerably minimises disturbance relative to constructing a new diversion channel.
decanting earth bund (DEB)	An impoundment area formed from a temporary bund or ridge of compacted earth. The bund provides an area where ponding of runoff can occur and suspended material can settle out before runoff is discharged.
dewatering	The removal of water from excavations, tunnelling, trenches and sediment control devices. Dewatering may be the removal of either surface water or groundwater that has collected.
dirty water	Sediment-laden runoff. In an ESC context this usually refers to water that has run through a works' area. This water requires treatment prior to discharge.
diversion channels and bunds	A non-erodible channel and/or bund for the conveyance of clean or dirty water runoff that is constructed for a specific design storm.
earthworks	The disturbance of soil, earth or substrate land surfaces for activities such as residential, commercial or infrastructure developments and maintenance, roads and utilities, and earthworks associated with quarrying, such as overburden disposal.
erodibility (of soils)	The susceptibility of soil particles to become detached by erosive forces.
erosion	The process whereby the land surface is worn away through physical, chemical or biological processes resulting in detachment and transport of soil particles. For different types of erosion see definitions in Table 1 (Part 1).

Term/abbreviation/ acronym	Description
erosion control blankets	Proprietary rolled erosion control products, commonly made from biodegradable materials. They provide an instant, short to medium-term protective cover of the soil surface, shielding it from the erosive forces of wind, raindrop impact and sheet flows, until a vegetative cover can be established or an alternative stabilisation methodology is used.
ESC	erosion and sediment control
filter sock	see 'silt sock'
flocculant	A reagent that promotes flocculation by causing colloids and other suspended particles in liquids to aggregate, forming a floc. Flocculants are used in water treatment processes to improve the sedimentation or filterability of small particles.
flocculation	A type of treatment where 'flocculant' is used to enable the sediment particles join together to form 'flocs', or larger, heavier particles that settle more rapidly.
FMP	Flocculation Management Plan
floc sock flocculant treatment	A type of flocculant treatment that is achieved by placing a segmented geosynthetic sock filled with a dry flake form of a reagent in the dirty water diversion channel, so that dirty water runoff will flow over the floc sock, dissolving and mixing with the reagent.
flume	See 'pipe drop structure'
geotextile	Permeable fabric which, when used in association with soil, has the ability to stabilise and protect.
GLEAMS	Groundwater Loading Effects of Agricultural Management Systems
grass seeding	The planting and establishment of quick growing and/or perennial grass to provide temporary and/or permanent stabilisation on exposed areas. The practice is often undertaken in conjunction with the placement of topsoil.
ha	hectare
HGMPA	<i>Hauraki Gulf Marine Park Act 2000</i>
hotmix	A type of asphalt concrete produced by heating the asphalt binder to decrease its viscosity, and drying the aggregate to remove moisture from it prior to mixing.
hotmix diversion bund	A bund constructed of hotmix directly on the impervious surface. These are often a replacement for a removed kerb and channel.
HSE Act	<i>Health and Safety in Employment Act 1992</i>
HSNO Act	<i>Hazardous Substances and New Organisms Act 1996</i>
HT	high tensile
hydroseeding	The application of seed, fertiliser and paper or wood pulp with water in the form of a slurry, which is sprayed over an area to provide for re-vegetation.
kg	kilogram

Term/abbreviation/ acronym	Description
land-disturbing activities	Defined in the Proposed Auckland Unitary Plan (PAUP, 2013) to include 'earthworks', 'ancillary farming earthworks' and 'ancillary forestry earthworks.'
m	metre
MHWS	mean high water spring
mm	millimetre
MSDS	material safety data sheet
mulching	A soil stabilisation practice that involves the application of a protective layer of straw or other suitable material to the soil surface.
NES:CS	National Environmental Standard for assessing and managing contaminants in soil to protect human health.
NIWA	National Institute of Water and Atmospheric Research
N:P:K	The ratio of nitrogen, phosphorus, and potassium in soil or fertiliser.
NZCPS	New Zealand Coastal Policy Statement (2010)
PAC	polyaluminium chloride
PAUP	Proposed Auckland Unitary Plan (2013)
permeability (of soils)	The ability of a soil to allow air and water to move through the soil.
pipe drop structure	A temporary pipe structure or constructed flume placed from the top of a slope to the bottom of a slope. The structure is designed to convey a concentrated flow of either clean or dirty surface runoff down a slope without causing erosion.
porosity (of soils)	The fraction of the total soil volume that is taken up by pore space.
PPE	personal protective equipment
rainfall activated flocculant treatment	Also called 'rainfall activated dosing'. This is an option for treatment (by flocculation) of sediment-laden runoff. It provides an appropriate level of dosage based on the rainfall volume and intensity.
rip-rap	A layer of large stones used to protect soil/shorelines from erosion in areas of concentrated runoff or scour.
RMA	<i>Resource Management Act 1991</i>
runoff	Surface water runoff (also known as overland flow) is the flow of water that occurs when excess stormwater, meltwater, or other sources flows over the earth's surface.
runon	Surface water flow (overland flow) into a site.
sedimentation	The deposition of eroded soil.

Term/abbreviation/ acronym	Description
sediment retention pond (SRP)	A temporary pond formed by excavation into natural ground, or by the construction of an embankment, which is used to detain runoff flows so that deposition of transported sediment can occur through settlement. SRPs incorporate an outlet device to dewater the pond at a rate that allows a high percentage of suspended sediment to settle out.
sediment yield	The amount of sediment discharged from a catchment reaching or passing a point of interest in a given period of time. Sediment yield estimates are normally given as tonnes per year or kilograms per year.
SiD	Safety in Design
silt fence	A temporary barrier of woven geotextile fabric that is used to capture mainly coarse sediments carried in sheet flow. Silt fences temporarily impound sediment-laden runoff, slowing down the flow rate and allowing sediment to settle out of the water.
silt sock	A tubular stormwater sediment control and filtration device, consisting of a mesh tube filled with a filter material (e.g. compost, sawdust, wood bark, straw) used to intercept and filter runoff. They are also referred to as 'filter socks'.
SBMP	Soil Binder Management Plan
Soil ameliorants	Substances that are added to soil to aid plant growth.
soil binders	Soil-stabilising agents (also known as polymers).
SSMP	Site Specific Safety Management Plan
stabilised entrance	Stabilised areas located at any entry or exit point of a construction site. These are stabilised through measures such as shaker ramps, or large rocks and are designed to prevent site access points becoming sources of sediment, and/or assist in minimising dust generation and disturbance of areas adjacent to the road frontage by providing a defined entry and exit point.
stormwater inlet protection	A sediment control practice that involves construction of a barrier across or around a catchpit or other stormwater inlet. The protection may take various forms depending upon the type of inlet to be protected.
super silt fence	<p>A temporary barrier of woven geotextile fabric over a chain link fence that is used to capture predominantly coarse sediments carried in sheet flows. Super silt fences temporarily impound sediment-laden runoff, reduce velocities and allow sediment to settle out of the water.</p> <p>The use of super silt fences is similar to that of silt fences. However, super silt fences are a more robust device that is appropriate to control runoff from steeper or larger catchments than silt fences.</p>
surface roughening	The practice of roughening the surface of unstabilised (bare soil) earth surface; either with horizontal grooves across the slope, or by tracking with construction equipment.
T-bar	A floating dewatering device that allows for the decanting of the cleaner surface water from the top of the water column.

Term/abbreviation/ acronym	Description
temporary watercourse crossings	Temporary culverts or bridge structures installed across a watercourse for short-term use by construction vehicles. They provide a means for construction vehicles to cross watercourses without moving sediment into the watercourse or directly affecting the streambed, generally while the new permanent crossing is installed.
topsoiling	A soil stabilisation practice that comprises the addition of topsoil to provide a suitable soil medium for vegetative growth for erosion control, while providing some protection of the subsoil layer and also increasing the absorption capacity of the soil.
treatment train	<p>The use of a range of practices, operating in series and linked to improve the overall efficiency of contaminant removal.</p> <p>In the context of ESC, this means that a series of ESC measures are planned to link functionally to form a treatment train. Each measure has a specific role within the framework of ESC. This approach can be a combination of structural (e.g. sediment retention ponds, perimeter controls) and non-structural (e.g. earthwork season) practices.</p>
turfing	A soil stabilisation practice that involves the establishment and permanent stabilisation of disturbed areas by laying a continuous cover of grass turf.
USLE	Universal Soil Loss Equation
WSD	water sensitive design



C


ESC construction quality checklists




'Clean water' or 'dirty water' diversion channel and bund

Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figures over page and Section E2.1 and E2.2 of GD05 for further details)	Yes (✓)	No (✕) (add comments to explain)	
Route avoids trees, services, fence lines or other natural or built features			
Channels are trapezoidal or parabolic in shape			
Internal side slopes are no steeper than 3:1 External side slopes are no steeper than 2:1			
Drains are constructed with a uniform grade along the invert (as sudden decreases may cause sediment to accumulate causing the bank to overtop)			
Bunds are well compacted			
Outlets are stable and protected as needed			
Diversions are stabilised to prevent erosion			
In some instances this may require specific geotechnical design to ensure the stability and integrity of the structure			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.

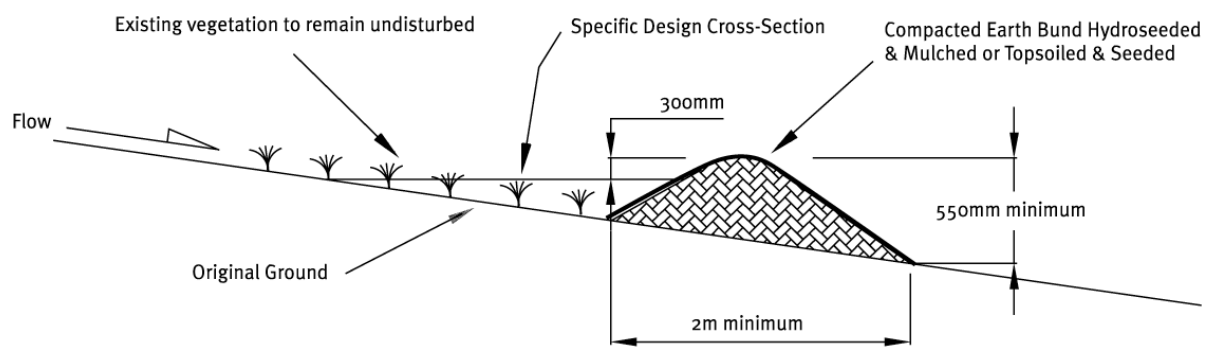

Cross Section

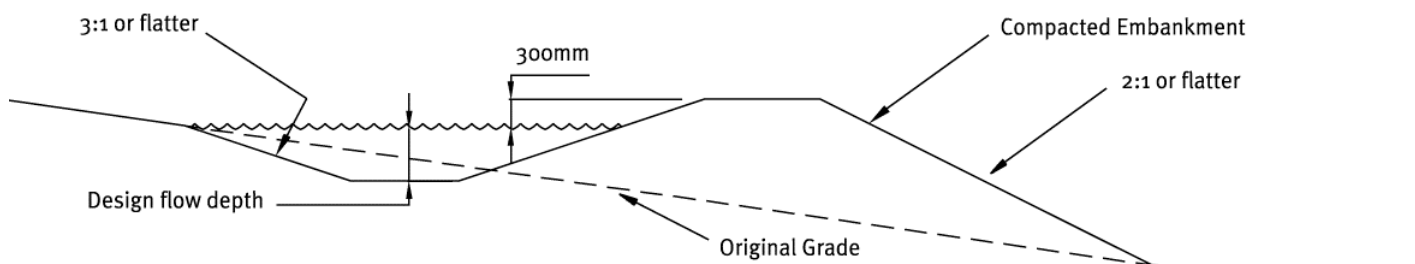


Cross Section

Contour drain (cut-off)

Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figures below and Section E2.3 of GD05 for further details)	Yes (✓)	No (✕) (Add comments to explain)	
Minimum compacted height is 250 mm			
Minimum total depth is 500 mm			
Longitudinal grade is < 2% (unless lined)			
Catchment area is < 0.5 ha			
Flow are is parabolic and not V-shaped			
Drains are as short as possible			
Earth windrows and banks are compacted			
Temporary contour drains are constructed across unprotected slopes at the end of the day's work and/or before forecast rain			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.

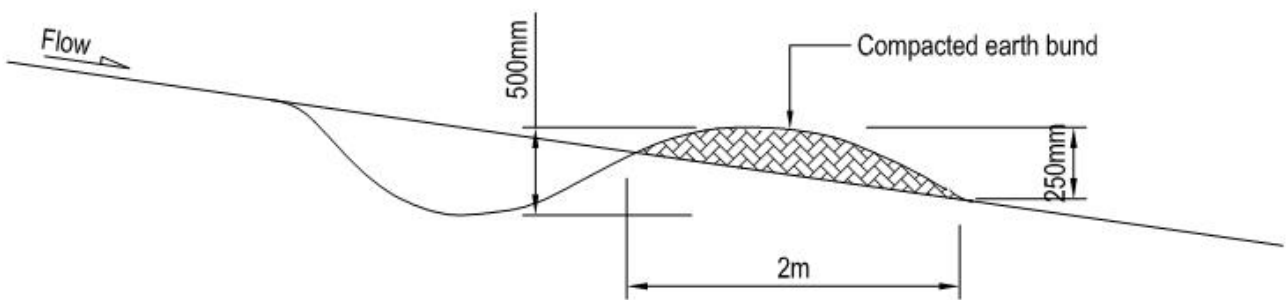

Cross - section

Erosion and sediment control construction


Quality checklist

Check dam


Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figures below and Section E2.4 of GD05 for further details)	Yes (✓)	No (✕) (Add comments to explain)	
Fabric used for sandbags is UV resistant			
Dams are spaced so the toe of an upstream dam is at approximately the same elevation as the centre height (spillway level) of the downstream dam			
Centre of the check dam is 150-200 mm lower than the outside edges to create a spillway			
Toes of the fabric dams extend >1 m up-slope and are buried in a 300 mm deep trench			
Geotextile fabric beneath check dams if constructed on erodible soils			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.



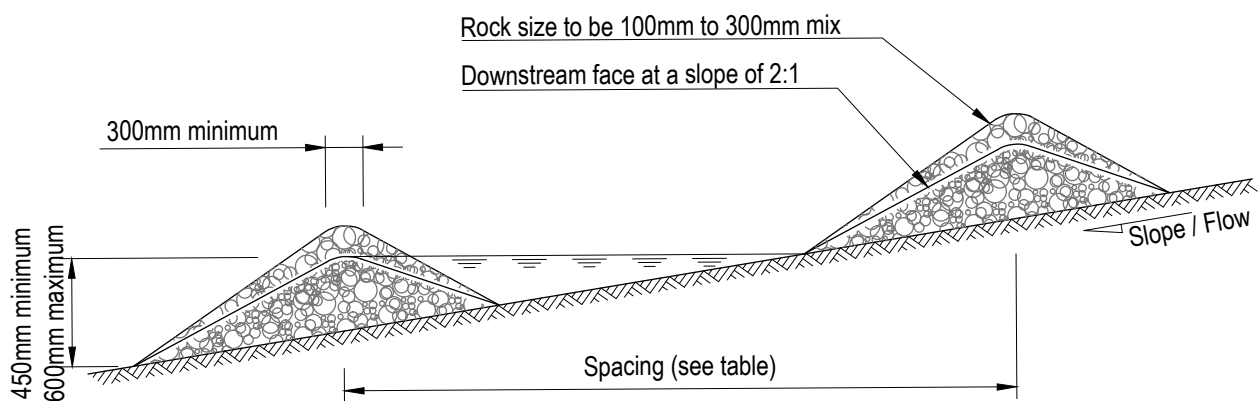

Elevation

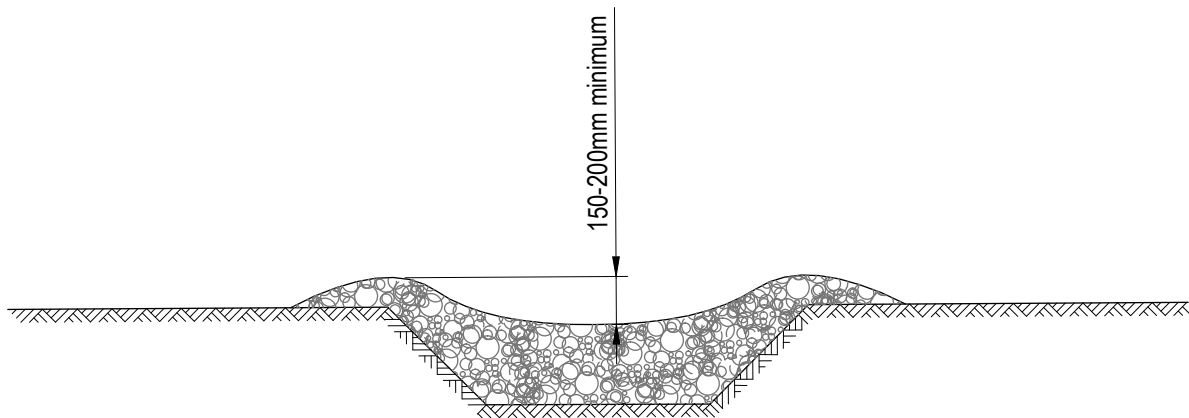



Cross - section

Slope of site (%)	Spacing (m) between dams with a 450 mm centre height	Spacing (m) between dams with a 600 mm centre height
Less than 2%	24	30
2 – 4%	12	15
4 – 7%	8	11
7 – 10%	5	6
>10%	Unsuitable – use stabilised channel or specific engineered design	Unsuitable – use stabilised channel or specific engineered design

Pipe drop structure and flume

Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figures below and Section E2.5 of GD05 for further details)	Yes (✓)	No (✕) (Add comments to explain)	
Use when slopes > 3:1			
Do not use on slopes < 5:1			
Device is constructed of an impervious material			
Upstream diversion channel or bund is 2 x height of flume or pipe			
A stabilised entry apron is installed to prevent scour or piping			
The device extends beyond the toe of the slope with erosion protection at the outfall			
Rigid or flexible pipe material has been used (where pipe used)			
Structure is pinned/secured to the slope every 4 m			
Connections are water tight			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.

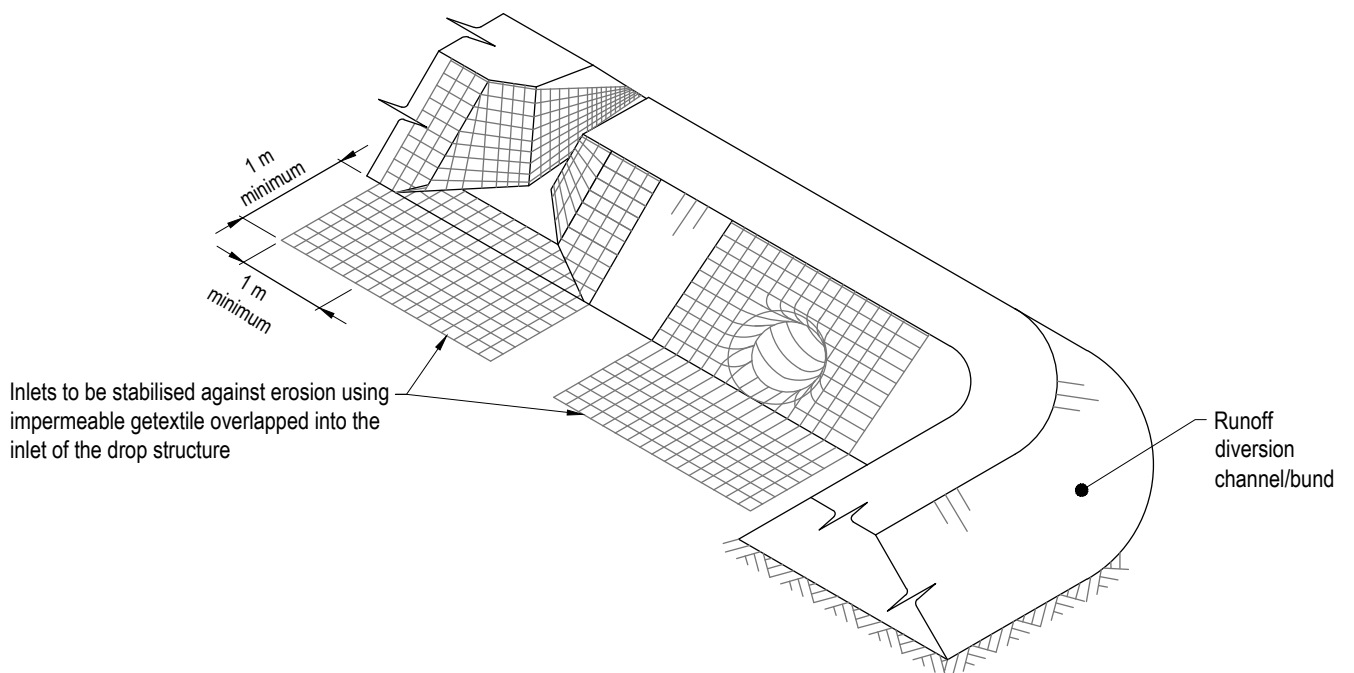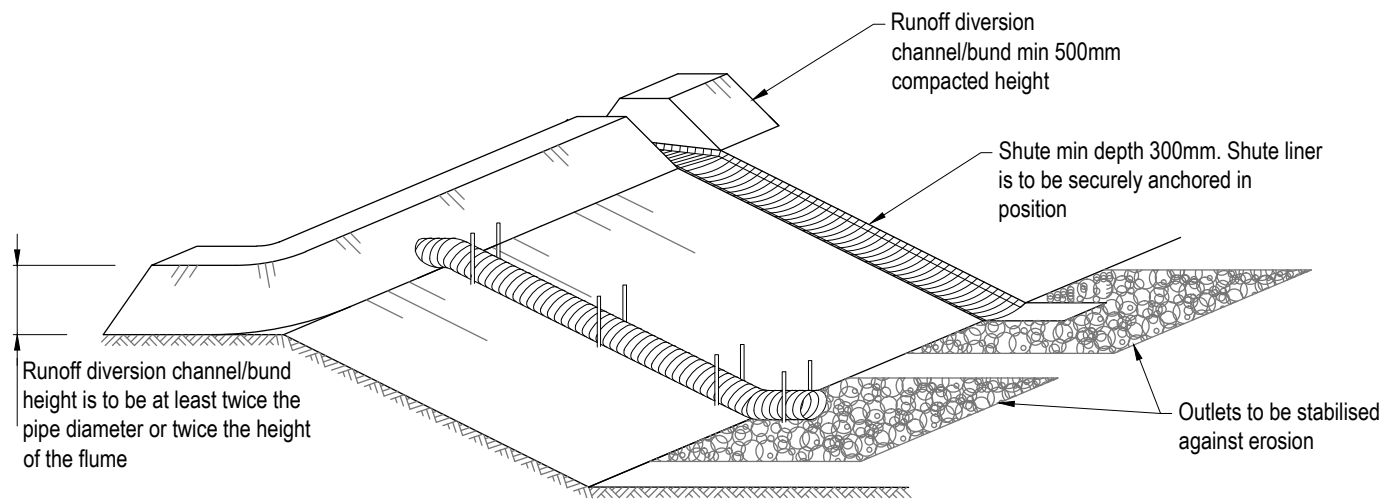

Erosion and sediment control construction


Quality checklist

Stabilised entranceway


Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figures below and Section E2.6 of GD05 for further details)	Yes (✓)	No (✕) (Add comments to explain)	
Area has been cleared of unsuitable material and smooth graded			
Woven geotextile has been placed over the area, and is properly pinned and overlapped, as necessary			
At least 10 m of aggregate has been placed (extending from site boundary), 4 m wide and minimum 150mm deep, using 50-150 mm washed aggregate			
Vehicles cannot bypass the entranceway			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.



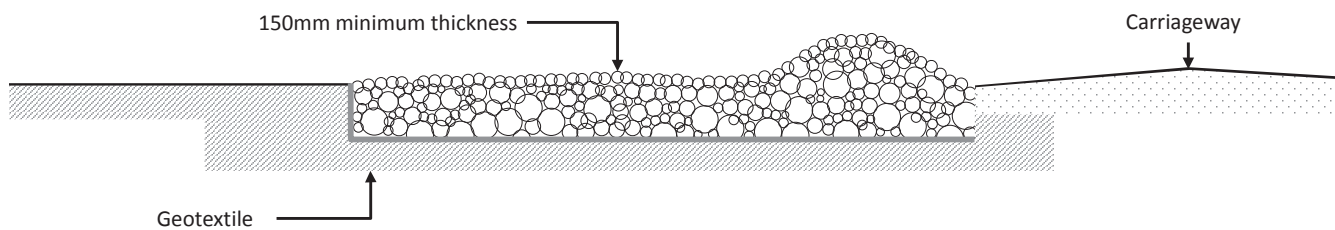

Side elevation

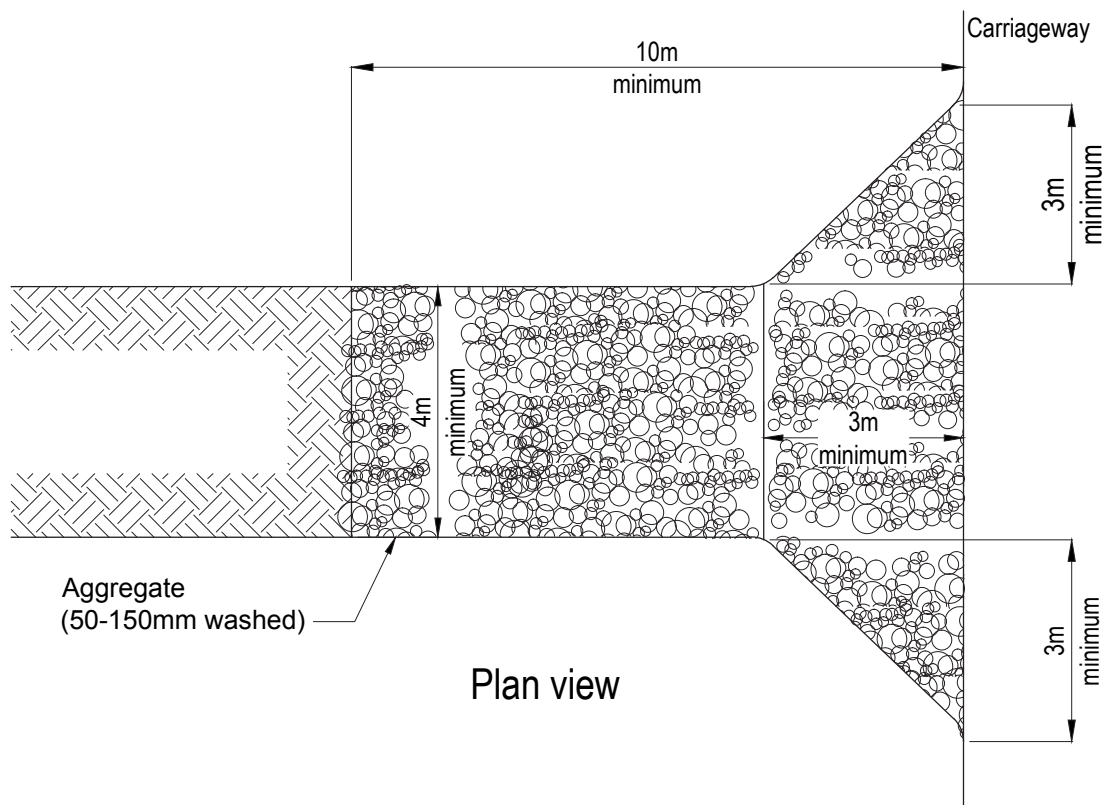


Plan view

Surface roughening

Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figures below and Section E2.7 of GD05 for further details)	Yes (✓)	No (✕) (Add comments to explain)	
Water is diverted away from the slope face prior to slope roughening			
Existing rills are filled before roughening			
Roughening is undertaken perpendicular to surface water flows			
When track-walking topsoil material, care is taken not to compact the slope			
For track-walking, well-defined cleat impressions are made in the soil, parallel to the contour or perpendicular to the slope			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.



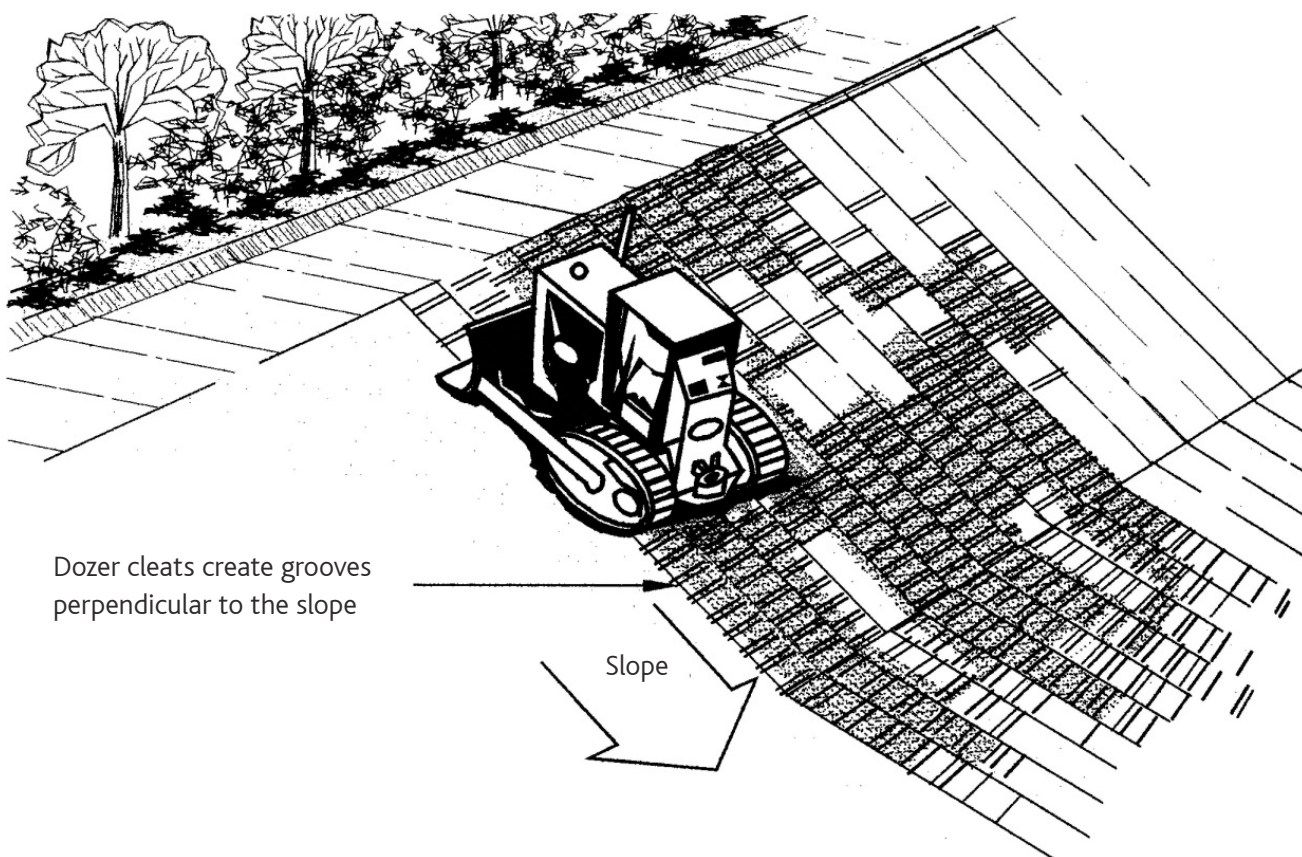

Dozer cleats create grooves
perpendicular to the slope

Slope

Topsoiling and grass seeding

Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figures below and Section E3.1 of GD05 for further details)	Yes (✓)	No (✕) (Add comments to explain)	
A good seed bed has been prepared, which is loose, uniform and free of large clods			
The soil surface is not compacted			
Greater than 100 mm of topsoil has been applied			
Fertiliser has been applied according to manufacturer's recommendations or following the guidelines in the Table below			
Seed has been applied uniformly at the required rate (see Table below)			
Site conditions and time of year are appropriate for germination. As outlined in Section E3.4 of GD05, mulching has been undertaken in conjunction with the seeding programme during dry or cold periods			
Adequate watering has been provided			
Grass strike ensures site coverage is > 80%			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.

Typical seed and fertiliser application rates

	Typical seed mix ¹	Application rate
Temporary seeding	Annual Ryegrass	100-250 kg/ha
Permanent seeding	Perennial Ryegrass – 70% Fescues/Cocksfoot – 20% Clover/Lotus – 5% Browntop – 5%	200-400 kg/ha
Fertiliser application	N:P:K (15:10:10)	200-800 kg/ha
Maintenance fertiliser	N:P:K (15:10:10) and Urea	As required

Note 1: In all circumstances ensure that the seed and fertiliser application rates and mix is appropriate for your site. Always discuss with your seed and fertiliser supplier prior to utilisation.



Erosion and sediment control construction

Quality checklist

Hydroseeding

Contractor:	Date: Time:	Consent #:	Site:
Construction checklist (refer Section E3.2 of GD05 for further details)	Yes (✓)	No (X) (Add comments to explain)	
A hydroseeding contractor has been consulted to ensure correct application, and the manufacturer's recommendations have been followed			
Adequate watering has been provided			
Grass strike ensures site coverage is > 80%			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.



Erosion and sediment control construction

Quality checklist

Turfing

Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Section E3.3 of GD05 for further details)	Yes (✓)	No (✕) (Add comments to explain)	
A good base has been prepared, which is loose, uniform and free of large clods and other objectionable material			
If turfing is placed during periods of high temperature, it is irrigated immediately prior			
Turf has been laid on the contour, starting at the bottom and working up slope; never up and down the slope			
Joints are butted tightly and do not stretch or overlap			
For slopes steeper than 3:1, turf has been secured to ground with pegs or other means			
Turf has been rolled and tamped immediately to ensure solid contact with ground			
Adequate watering is provided			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.



Erosion and sediment control construction

Quality checklist

Mulching

Contractor:	Date: Time:	Consent #:	Site:
Construction checklist (refer Section E3.4 of GD05 for further details)		Yes (✓)	No (✕) (Add comments to explain)
Straw or hay mulch is unrotted material and has been applied at a rate that provides a completed cover of the soil surface. This is typically in the order 4,000-6,000 kg/ha. Mulch material is relatively free of weeds and does not contain noxious weed species. A list of noxious weeds can be obtained from Auckland Council			
If wind is a problem, mulch is either crimped or bound to prevent blowing			
Hydro mulch contains a minimum of 80% virgin or recycled wood and has been applied in accordance with the manufacturer's specifications. The application rate will range from 2,200 kg/ha – 2,800 kg/ha depending on the slope gradient. The coverage should not exceed slope length < 150 m			
Wood chip is applied at rates of 10,000 kg/ha – 13,000 kg/ha			
If stockpiling woodchips on site, stockpiles are turned every so often to reduce the risk of heating			


Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.



Geotextiles and erosion control blankets


Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figure over page and Section E3.5 of GD05 for further details)	Yes (✓)	No (X) (Add comments to explain)	
Site is prepared to ensure complete contact of the blanket or matting with the soil			
Area is graded and shaped for installation			
All rocks, clods, vegetation or other obstructions are removed			
Seedbed is prepared by loosening 50 mm to 75 mm of topsoil			
Area is seeded prior to blanket installation unless specified otherwise			
Wire staples, stake pins or wooden stakes have been placed to anchor mats and blankets to the ground. Proper sized anchoring materials have been used			
On slopes, the blanket was started at the top of the slope and rolled down-slope			
Blanket edges are overlapped			
In channels, there is an anchor trench >150 mm deep x 150 mm across at the lower end of the project			
Intermittent check slots are installed at 8-10 m intervals			
Side fabric edges are keyed in at least 100 mm deep x 100 mm wide			
Channel fabric has been started at the downstream end with upstream geotextile overlapping < 75 mm			
Upstream end has been keyed in >300 mm x 150 mm wide			
Turf reinforcement matting has been seeded and filled with soil if specified			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.

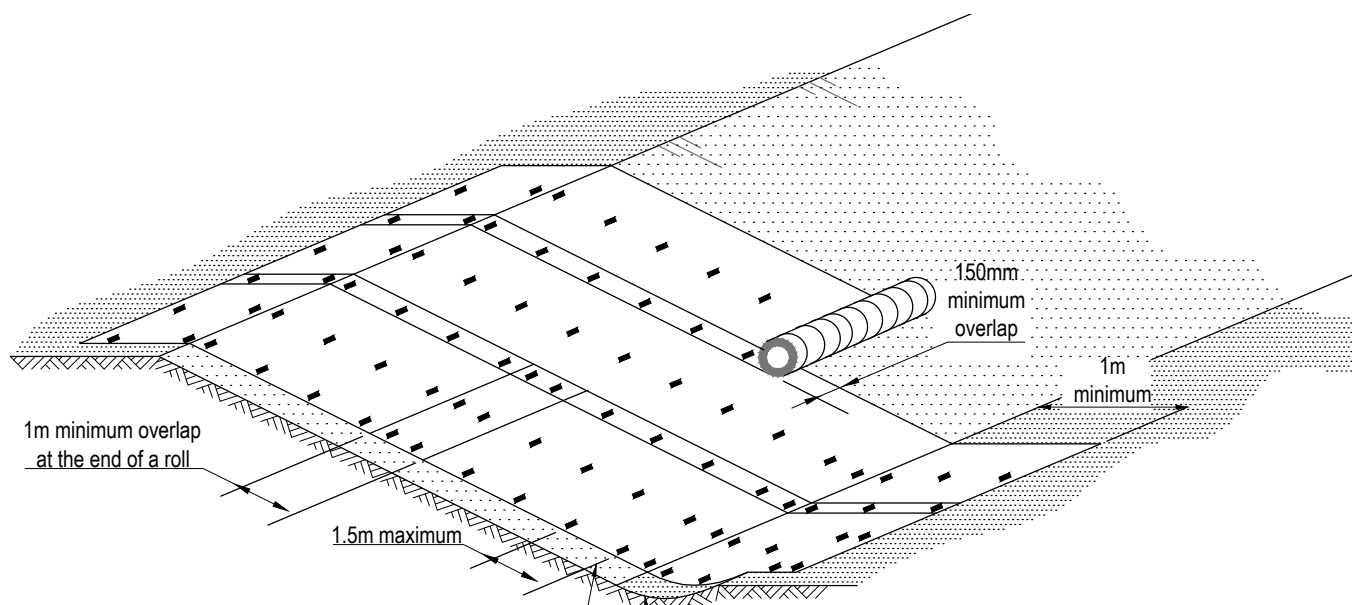

Anchor type is to be to the manufacturer's recommendation.
Anchor spacing is to be to the smaller of the manufacturer's recommendation or the dimensions shown.



Where the slope terminates in an area of concentrated flow the geofabric must be laid through the flowpath and pinned down on a 500mm grid.

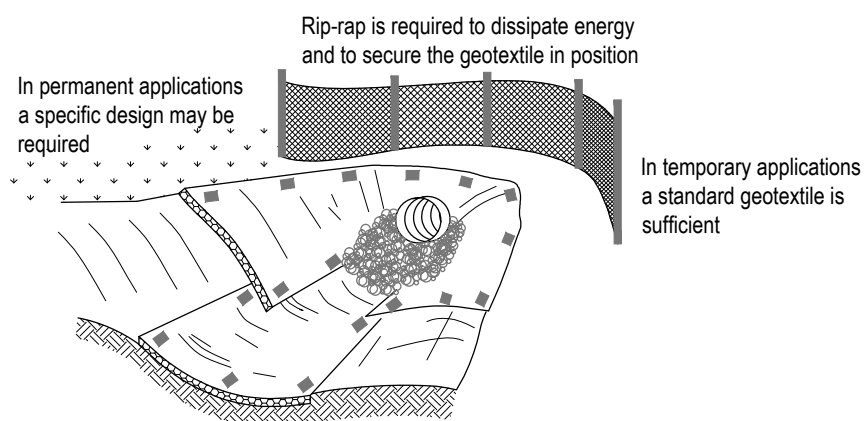

Sediment retention pond

Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figure over page and Section F1.1 of GD05 for further details)	Yes (✓)	No (✕) (Add comments to explain)	
Sediment control has been implemented down-slope of the proposed sediment retention pond			
Areas are cleared of proposed fill or topsoil or other suitable material down to competent material			
Only approved fill material has been used			
Fill has been placed and compacted in layers as per the engineering recommendations, and appropriate testing has been undertaken to confirm compliance			
Fill embankment has been constructed 10% higher than the design height to allow for settlement			
Pipework and anti-seep collars or filter collars have been installed during construction of the embankment, with good compaction around pipes			
The emergency spillway has been constructed as per instructions in Section F1.1.2 of GD05			
A level spreader has been installed and stabilised			
The decant and pulley system is securely attached to the horizontal pipework, with all connections watertight. Manhole risers have been placed on a firm foundation of concrete or compacted soil			
Inlets and outlets are protected with fabric			
Baffles are installed when the pond's length to width ratio < 3:1			
An all-weather access track is provided for maintenance			
All elevations have been checked to ensure proper function and rectify any inaccuracies			
Both internal and external batters and the emergency spillway have been stabilised in accordance with the approved erosion and sediment control plan			
An as-built assessment has been undertaken at the completion of construction and any discrepancies with the design rectified			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.

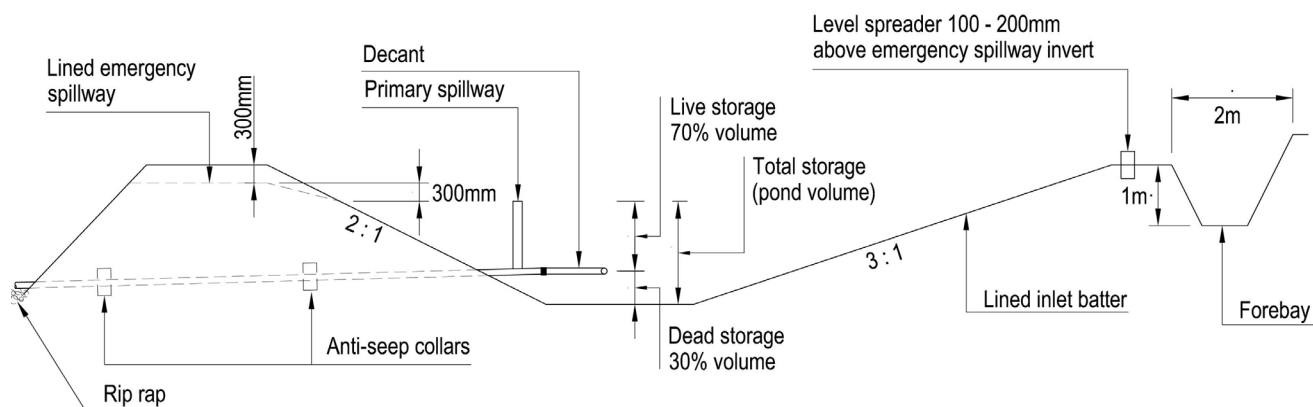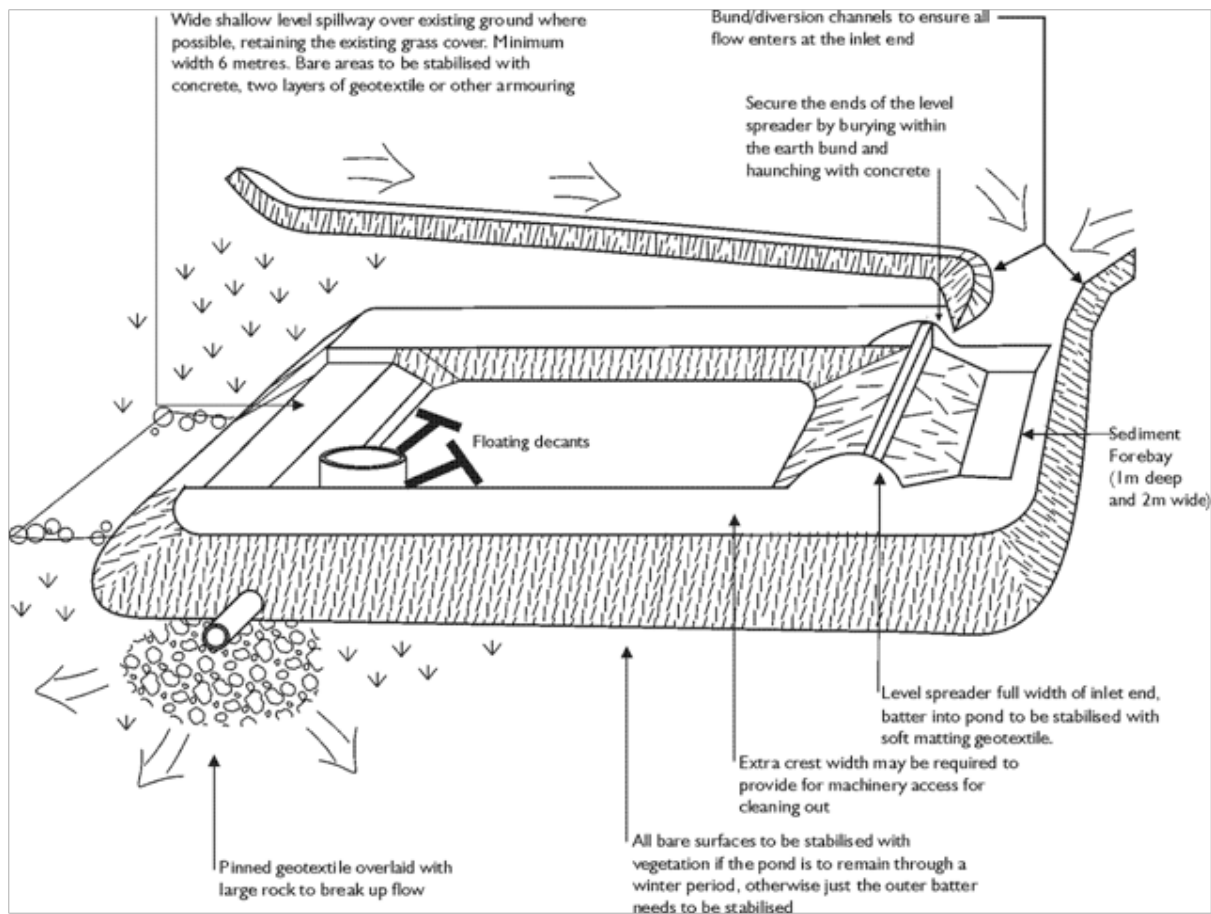

SRP cross - section


Decanting earth bund (DEB)

1 of 2

Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figures over page and Section F1.2 of GD05 for further details)	Yes (✓)	No (✕) (Add comments to explain)	
DEB has been built along the contour to obtain the required volumes			
All organic/ vegetation is removed before construction			
The DEB is keyed into the existing ground to a minimum depth of 0.3 m			
The DEB is built with a clay-silt mix of suitable moisture content to achieve a reasonable compaction standard (90%). This can be achieved, in most instances, by track rolling at 150 – 200 mm lifts. Particular care is required to achieve good compaction around the outlet pipe that passes through the bund to avoid seepage and potential failure			
A 150 mm diameter non-perforated outlet pipe has been installed through the bund and discharges to a stable erosion proofed area or stormwater system			
A T-Bar decant has been attached by way of a standard joint (glued and screwed). The decant is 100 or 150 mm dia. PVC pipe, 0.5 m long with equally spaced holes of 10 mm diameter and fixed firmly to a waratah standard to achieve 0.3 litres/ second/1,000 m ² of contributing catchment			
A sealed PVC pipe (with endcaps) has been placed on top of the decant to provide buoyancy			
A flexible thick rubber coupling has been used to provide a connection between the decant arm and the discharge pipe. The flexible coupling has been fastened using strap clamps, glue and screws			

Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figures over page and Section F1.2 of GD05 for further details)		Yes (✓)	No (✕) (Add comments to explain)
The decant is fastened to two waratahs by way of a nylon cord to the correct height			
An emergency spillway has been provided to a stabilised outfall 100 mm freeboard height above the primary spillway. This can be a trapezoidal spillway with a minimum invert length of 2 m that is smooth, has no voids and is lined with a soft needle punched geotextile to the stabilised outfall. The geotextile is pinned at 0.5 m centres			
The emergency spillway has a minimum freeboard of 250 mm, i.e. between the invert of the spillway to the lowest point of the top of the bund			
An as-built assessment has been completed at the completion of construction to check against the design. Any discrepancies have been rectified.			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.

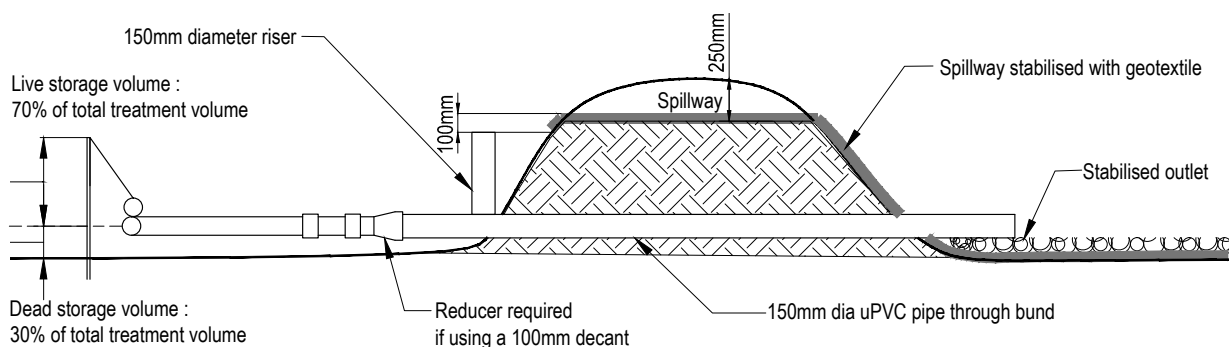

Cross - section



Erosion and sediment control construction


Quality checklist

Silt fence



Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Table and Figure over page and Section F1.3 of GD05 for further details)	Yes (✓)	No (✕) (Add comments to explain)	
The silt fence material used is appropriate to the site conditions and in accordance with the manufacturer's specifications			
Silt fences have been installed along the contour			
A trench of a minimum of 100 mm wide and 200 mm deep has been excavated along the proposed line of the silt fence			
Supporting posts /steel waratahs are installed at least 1.5 m length and 2-4 m apart			
Support posts/waratahs are installed on the down-slope edge of the trench, with silt fence fabric on the up-slope side of the support posts to the full depth of the trench. The trench is backfilled with compacted soil			
The top of the silt fence fabric is reinforced with a support made of high tensile 2.5 mm diameter galvanised wire. The wire is tensioned using permanent wire strainers attached to angled waratahs at the end of the silt fence			
The silt fence fabric is doubled over and fastened to the wire with silt fence clips at 500 mm spacings			
Where ends of the silt fence fabric come together, they are overlapped, folded and stapled/screwed to prevent sediment bypass			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.

Slope steepness %	Slope length (m) (maximum)	Spacing of returns (m)	Silt fence length (m) (maximum)
Flatter than 2%	Unlimited	N/A	Unlimited
2 – 10%	40	60	300
10 – 20%	30	50	230
20 – 33%	20	40	150
33 – 50%	15	30	75
> 50%	6	20	40

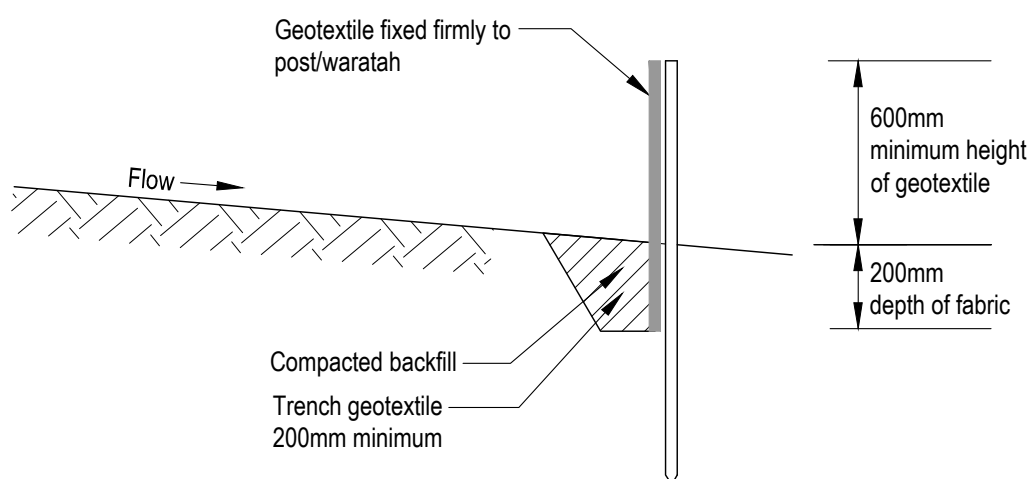

Cross - section

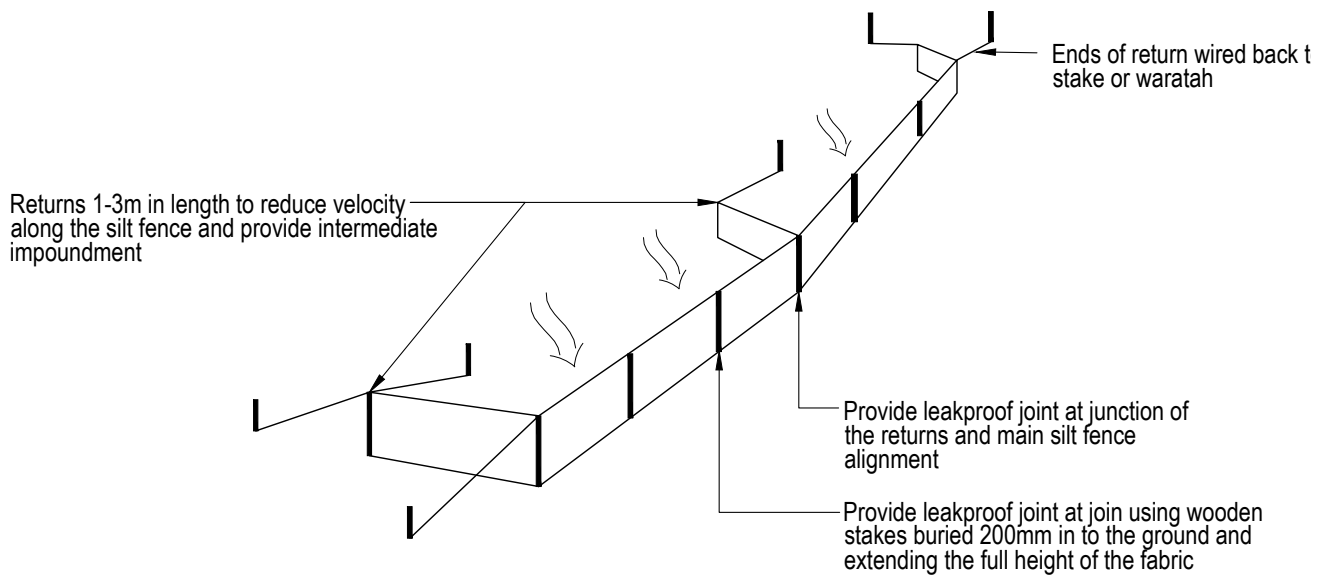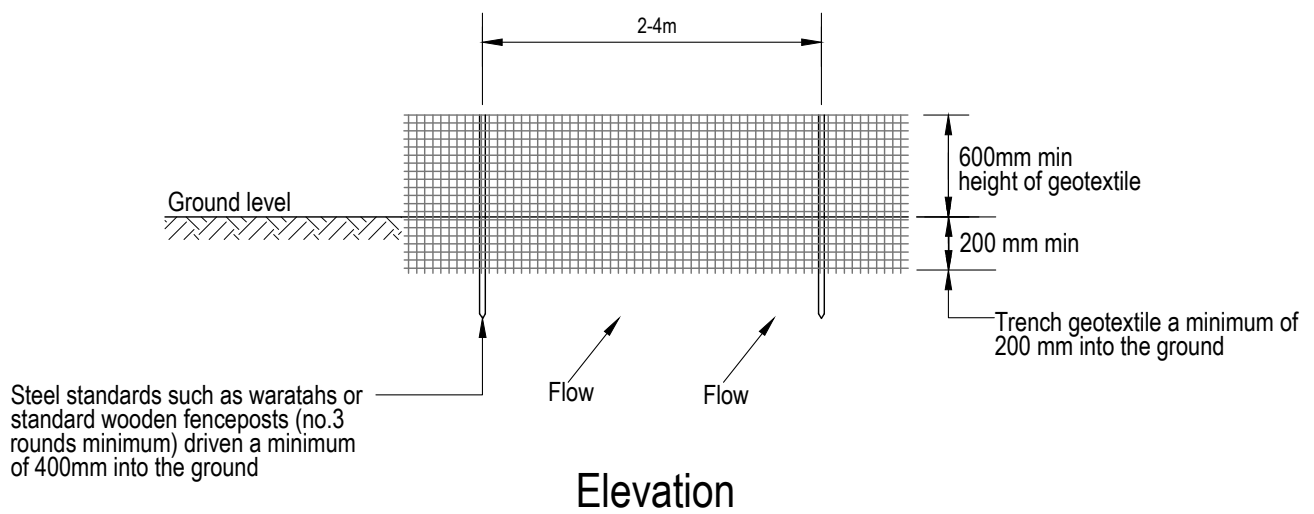


Silt fence with returns and support wire


Super silt fence

Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figure and table over page and Section F1.4 of GD05 for further details)	Yes (✓)	No (X) (Add comments to explain)	
Super silt fence material used is appropriate to the site conditions and in accordance with the manufacturer's specifications			
Super silt fences are installed along the contour			
A trench of a minimum of 100 mm wide and 200 mm deep has been excavated along the proposed line of the silt fence			
Supporting posts /steel waratahs are installed at least 1.8 m length and 2–4m apart			
Support posts/waratahs are installed on the down-slope edge of the trench, with silt fence fabric on the up-slope side of the support posts to the full depth of the trench. The trench is backfilled with compacted soil			
Tensioned galvanised wire (2.5 mmHT) is installed at 400 mm and again at 800 mm above ground. The wire has been tensioned using permanent wire strainers attached to angled waratahs at the end of the super silt fence			
Chain link fence is secured to the fence posts with wire ties or staples, ensuring the chain link fence goes to the base of the trench			
Two layers of geotextile fabric are secured to the base of the trench (a minimum of 200 mm into the ground), with compacted backfill installed to the original ground level			
Where ends of the silt fence fabric come together, they are overlapped, folded and stapled/screwed to prevent sediment bypass			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.

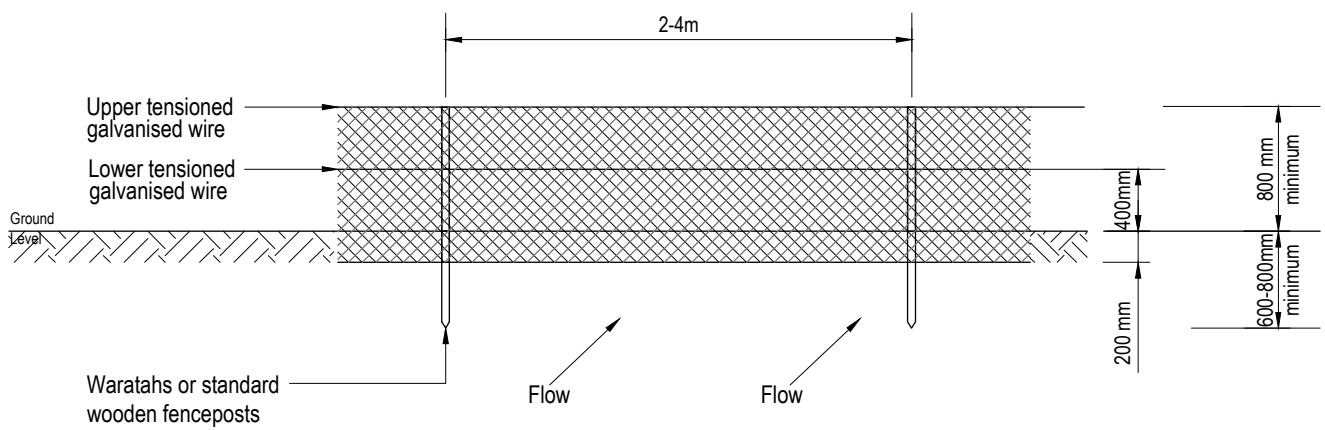

Elevation

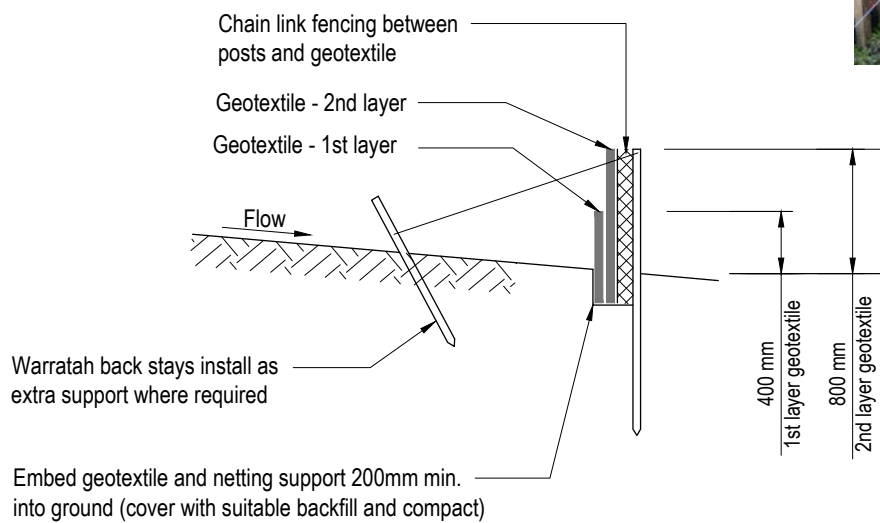

Cross - section

Slope steepness %	Slope length (m) (maximum)	Spacing of returns (m)	Super silt fence length (m) (maximum)
0 – 10%	Unlimited	60	Unlimited
10 – 20%	60	50	450
20 – 33%	30	40	300
33 – 50%	30	30	150
> 50%	N/A	20	N/A

Erosion and sediment control construction

Quality checklist

Silt sock

Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figure over page and Section F1.5 of GD05 for further details)	Yes (✓)	No (✕) (Add comments to explain)	
Silt socks are installed on the contour. Where this is not possible, or where there are long sections of silt sock, short silt sock returns are installed, projecting up-slope from the silt sock to minimise concentration of flows. Returns are a minimum of 2 m in length			
Silt socks are overlapped by >1 m and joined by a sleeve where more than one length of silt sock is used			
Silt sock "wings" are installed at either end of the silt sock, projecting a sufficient length up-slope to prevent outflanking			
The silt sock is pegged and secured, depending on the application			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.



Stormwater inlet protection

Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figure below and Section F1.6 of GD05 for further details)	Yes (✓)	No (✕) (Add comments to explain)	
An emergency bypass is included			
The device does not allow water to bypass its intended flow path			
The device is removed as soon as possible following the completion of works			


Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.



Flocculant treatment - rainfall activated shed

Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figure over page and Section F2.0 of GD05 for further details)	Yes (✓)	No (✕) (Add comments to explain)	
All components are on site including: <ul style="list-style-type: none"> • Rainfall catchment tray • Header tank • Displacement tank • Flocculant reservoir tank 			
The design approach has been followed – this should provide sizing of the various elements and pipe sizes. Check that the flocculant volume has been based on site soil testing			
Rainfall tray has been constructed and sealed along any joints and graded at approximately a 10:1 slope with a drain to the header tank at the low end			
The header tank is installed properly with pipe sizes and elevations done according to plans			
The displacement tank has capacity to hold runoff from the 50% AEP event			
The flocculant reservoir tank is larger than the displacement tank and of sufficient capacity to dose a large storm			
The flocculant tank outlet is a 20 mm hose located at the point that will retain flocculant for the dosing of runoff from the 50% AEP event w/out displacement			
The dosing point of the outlet into the sediment diversion channel is at least 5 m upstream of the forebay			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.

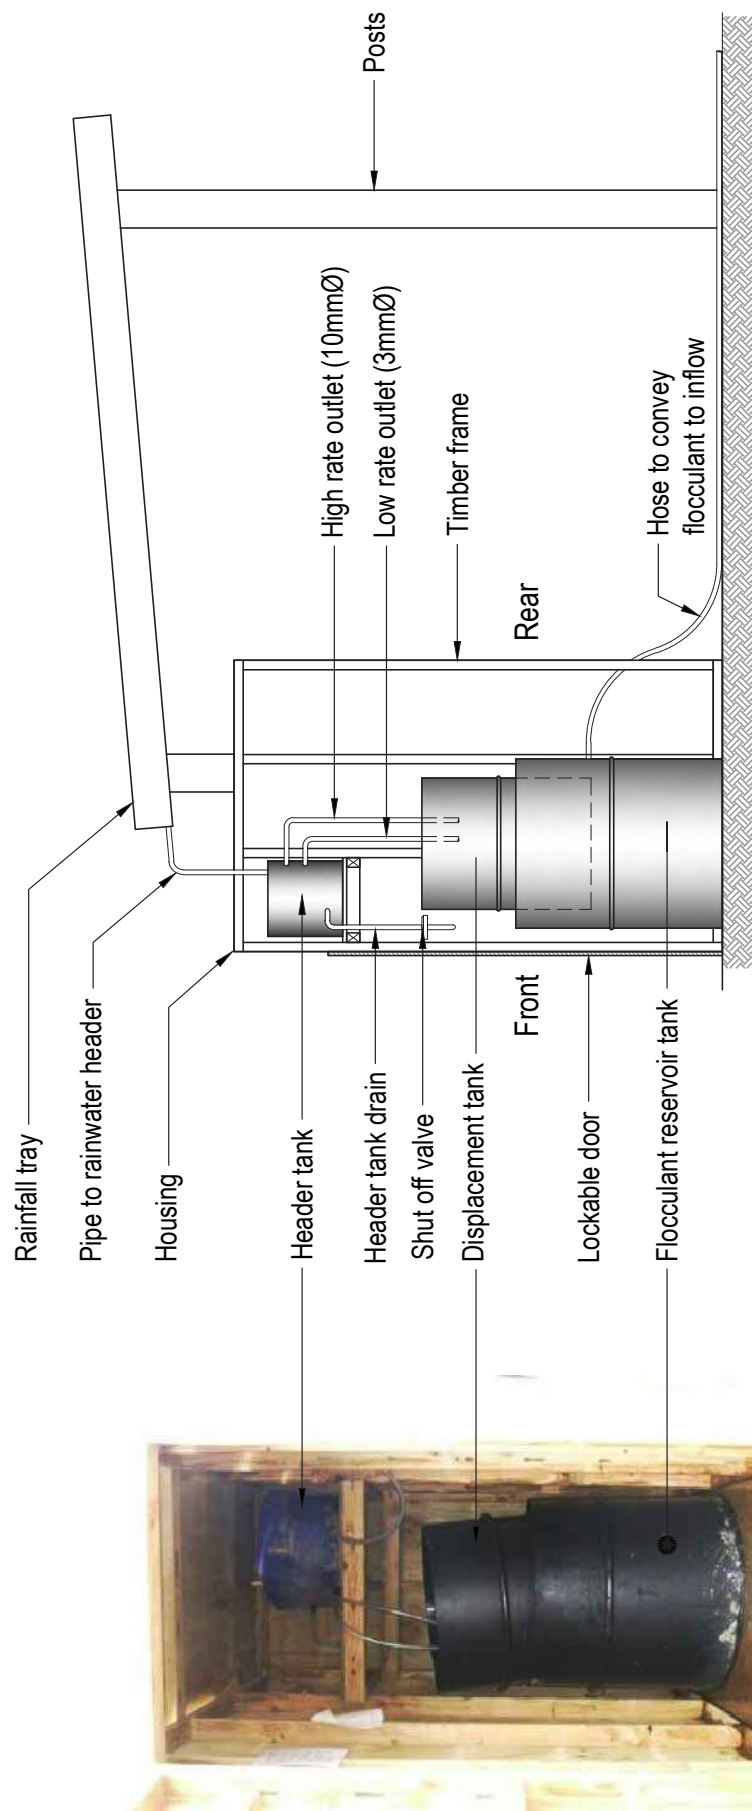

Dewatering

Contractor:	Date:	Consent #:	Site:
	Time:		
Construction checklist (refer Figure over page and Section G1.0 of GD05 for further details)		Yes	No (Add comments to explain)
The cleaner water is always dewatered at the top first, then the residual sediment-laden water is pumped to a tank/truck			
The outlet to any pumped water is not creating any erosion issues. In some cases, an energy dissipater and a stabilised area may need to be constructed to discharge the pumped flows into			
The discharge is being monitored to ensure the pumped discharge is meeting the required discharge standards at all times			
<p>A minimum of 100 mm water clarity is required to pump directly offsite. If there is not 100 mm water clarity, the water is either:</p> <ul style="list-style-type: none"> • Treated in situ until the clarity is achieved and then pumped offsite • Pumped to a sediment retention device, tank or skip for settlement or flocculant treatment device before discharge offsite (Note: If pumping to a DEB or SRP, the outlet should be capped until it has been checked that 100 mm clarity has been achieved before the water is released) • Pumped to a tanker and removed offsite 			
Water is recycled wherever possible (e.g. for dust suppression or earthworks conditioning)			
Small volumes of sediment-laden water are pumped to a silt fence or decanting earth bund, but do not overwhelm these practices			
Larger volumes of sediment-laden water are pumped to a sediment forebay of a sediment retention pond			

Note: The purpose of this checklist is for contractors to complete on-site self-checks of construction quality for ESC practices. This is not a compliance or as-built checklist.





D

Recommended line
types and symbols

The following table includes recommended line types and symbols for use in ESC Plans.

These are listed in alphabetical order.

Line type / ESC practice measure	Recommended symbol
Baffles	
Catchment boundary	
Check dam	
Clean water diversion bund	
Coffer dam	
Contour drain	
Decanting earth bund (not to scale)	
Dirty water diversion bund	
Earth bund	
Earthworks extent (approx)	
Existing boundaries	
Existing contours	
Existing watercourse	
Existing stormwater (pipe) reticulation	
Flow direction	
Geotextile	
Haul road centreline	
Hydro seeding	
Level spreader	
Mulching	
Permanent seeding	
Pipe drop structure / flume	
Proposed contours	
Proposed culvert	
Rain activated treatment system	
Rock rip-rap	
Sediment retention pond (drawn to scale)	
Silt fence	
Silt sock	
Stabilised entranceway	
Stormwater inlet protection	
Super silt fence	
Surface roughening	
Temporary seeding	
Temporary watercourse crossing	
Temporary watercourse diversion	
Top soiling	
Turfing	
Works within watercourse (area of works)	



E


ESC site plan /
drawing examples




This Appendix includes examples of ESC site plans/drawings that are considered best practice.

It is recommended that the ESC site plan/drawing contains the following information:

- A title, date, drawing reference number, north arrow, scale and legend
- A unique identifier for each ESC control structure
- The areal extent of soil disturbance (earthworks footprint)
- The location of ESC devices, including volumes and dimensions where relevant
- The location of topsoil stockpiles
- Contributing catchments for each ESC device
- Identification of any 'no go' or buffer areas to maintain on the site
- Clearly marked areas of cut and fill (e.g. zerocut to fill line), including any soil disposal areas
- Arrows depicting the general flow path/direction of water within each catchment
- All watercourses and/or overland flow paths
- Historical/cultural/natural heritage sites
- Site entranceways
- Pond dimensions
- The site boundaries
- Contour lines – both within and around the site
- Staging (if applicable)
- High risk areas (if applicable)
- Aerial image (if available and clear without affecting readability of drawing)
- Any other relevant information.

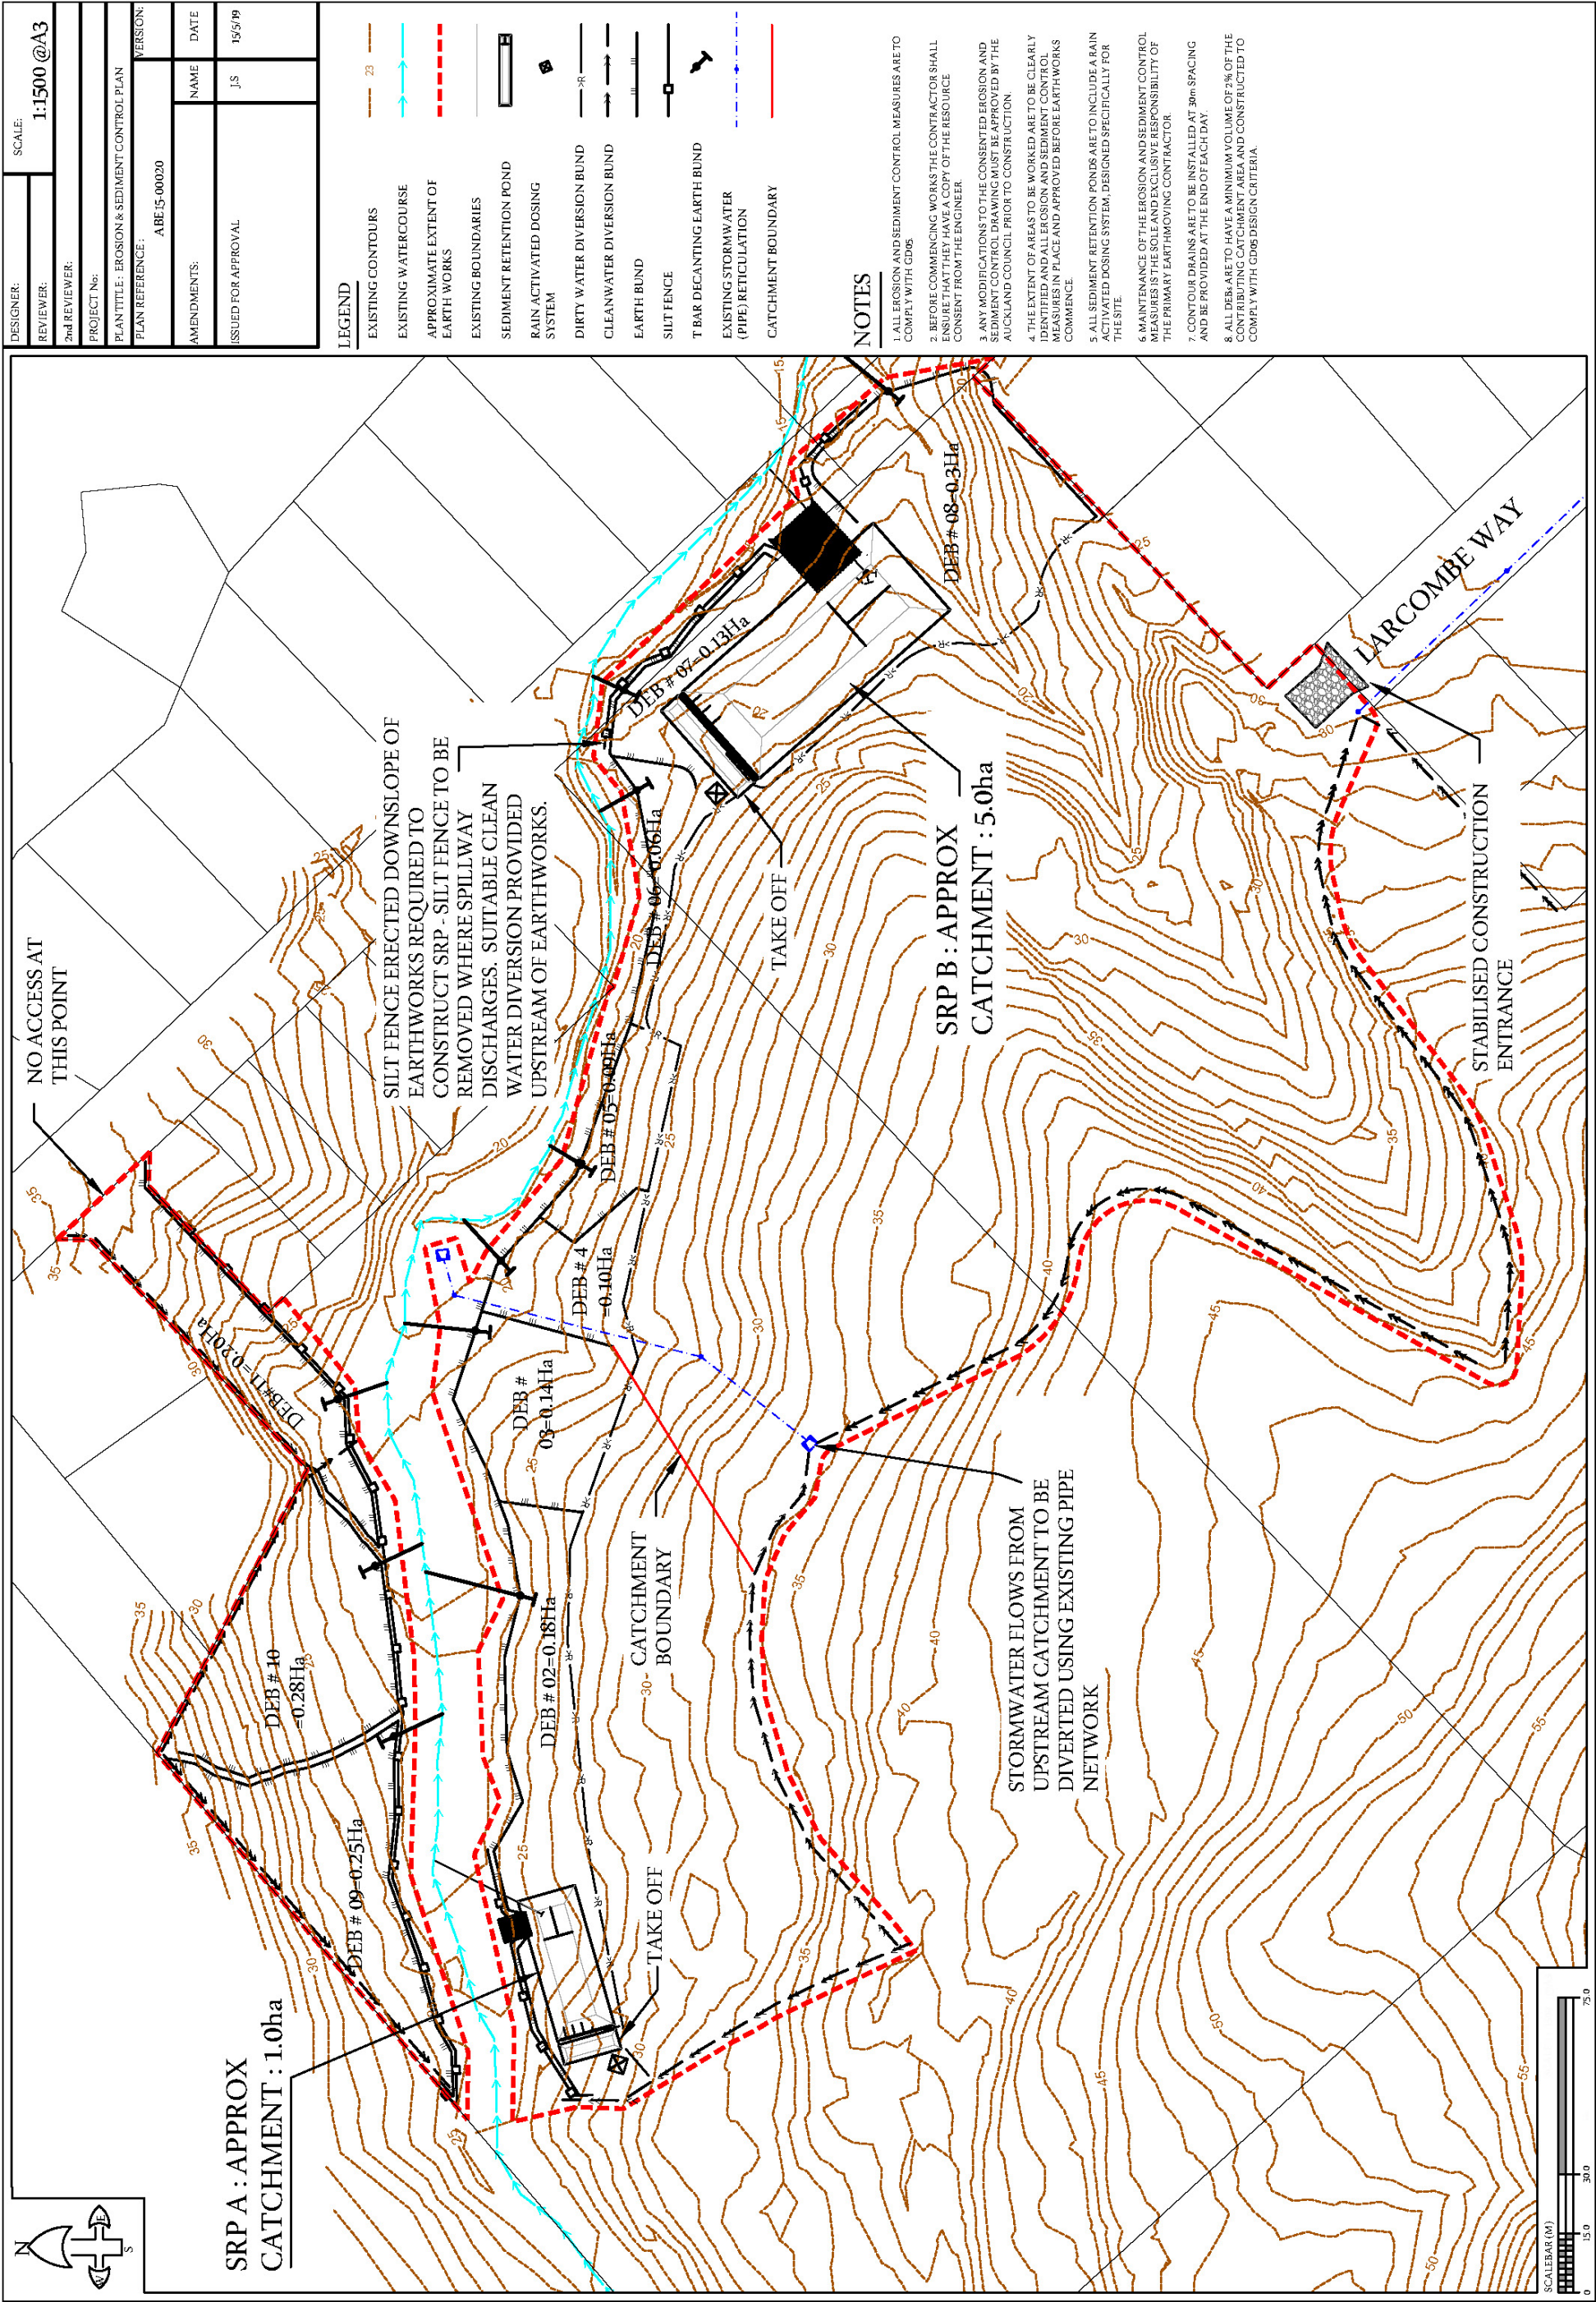

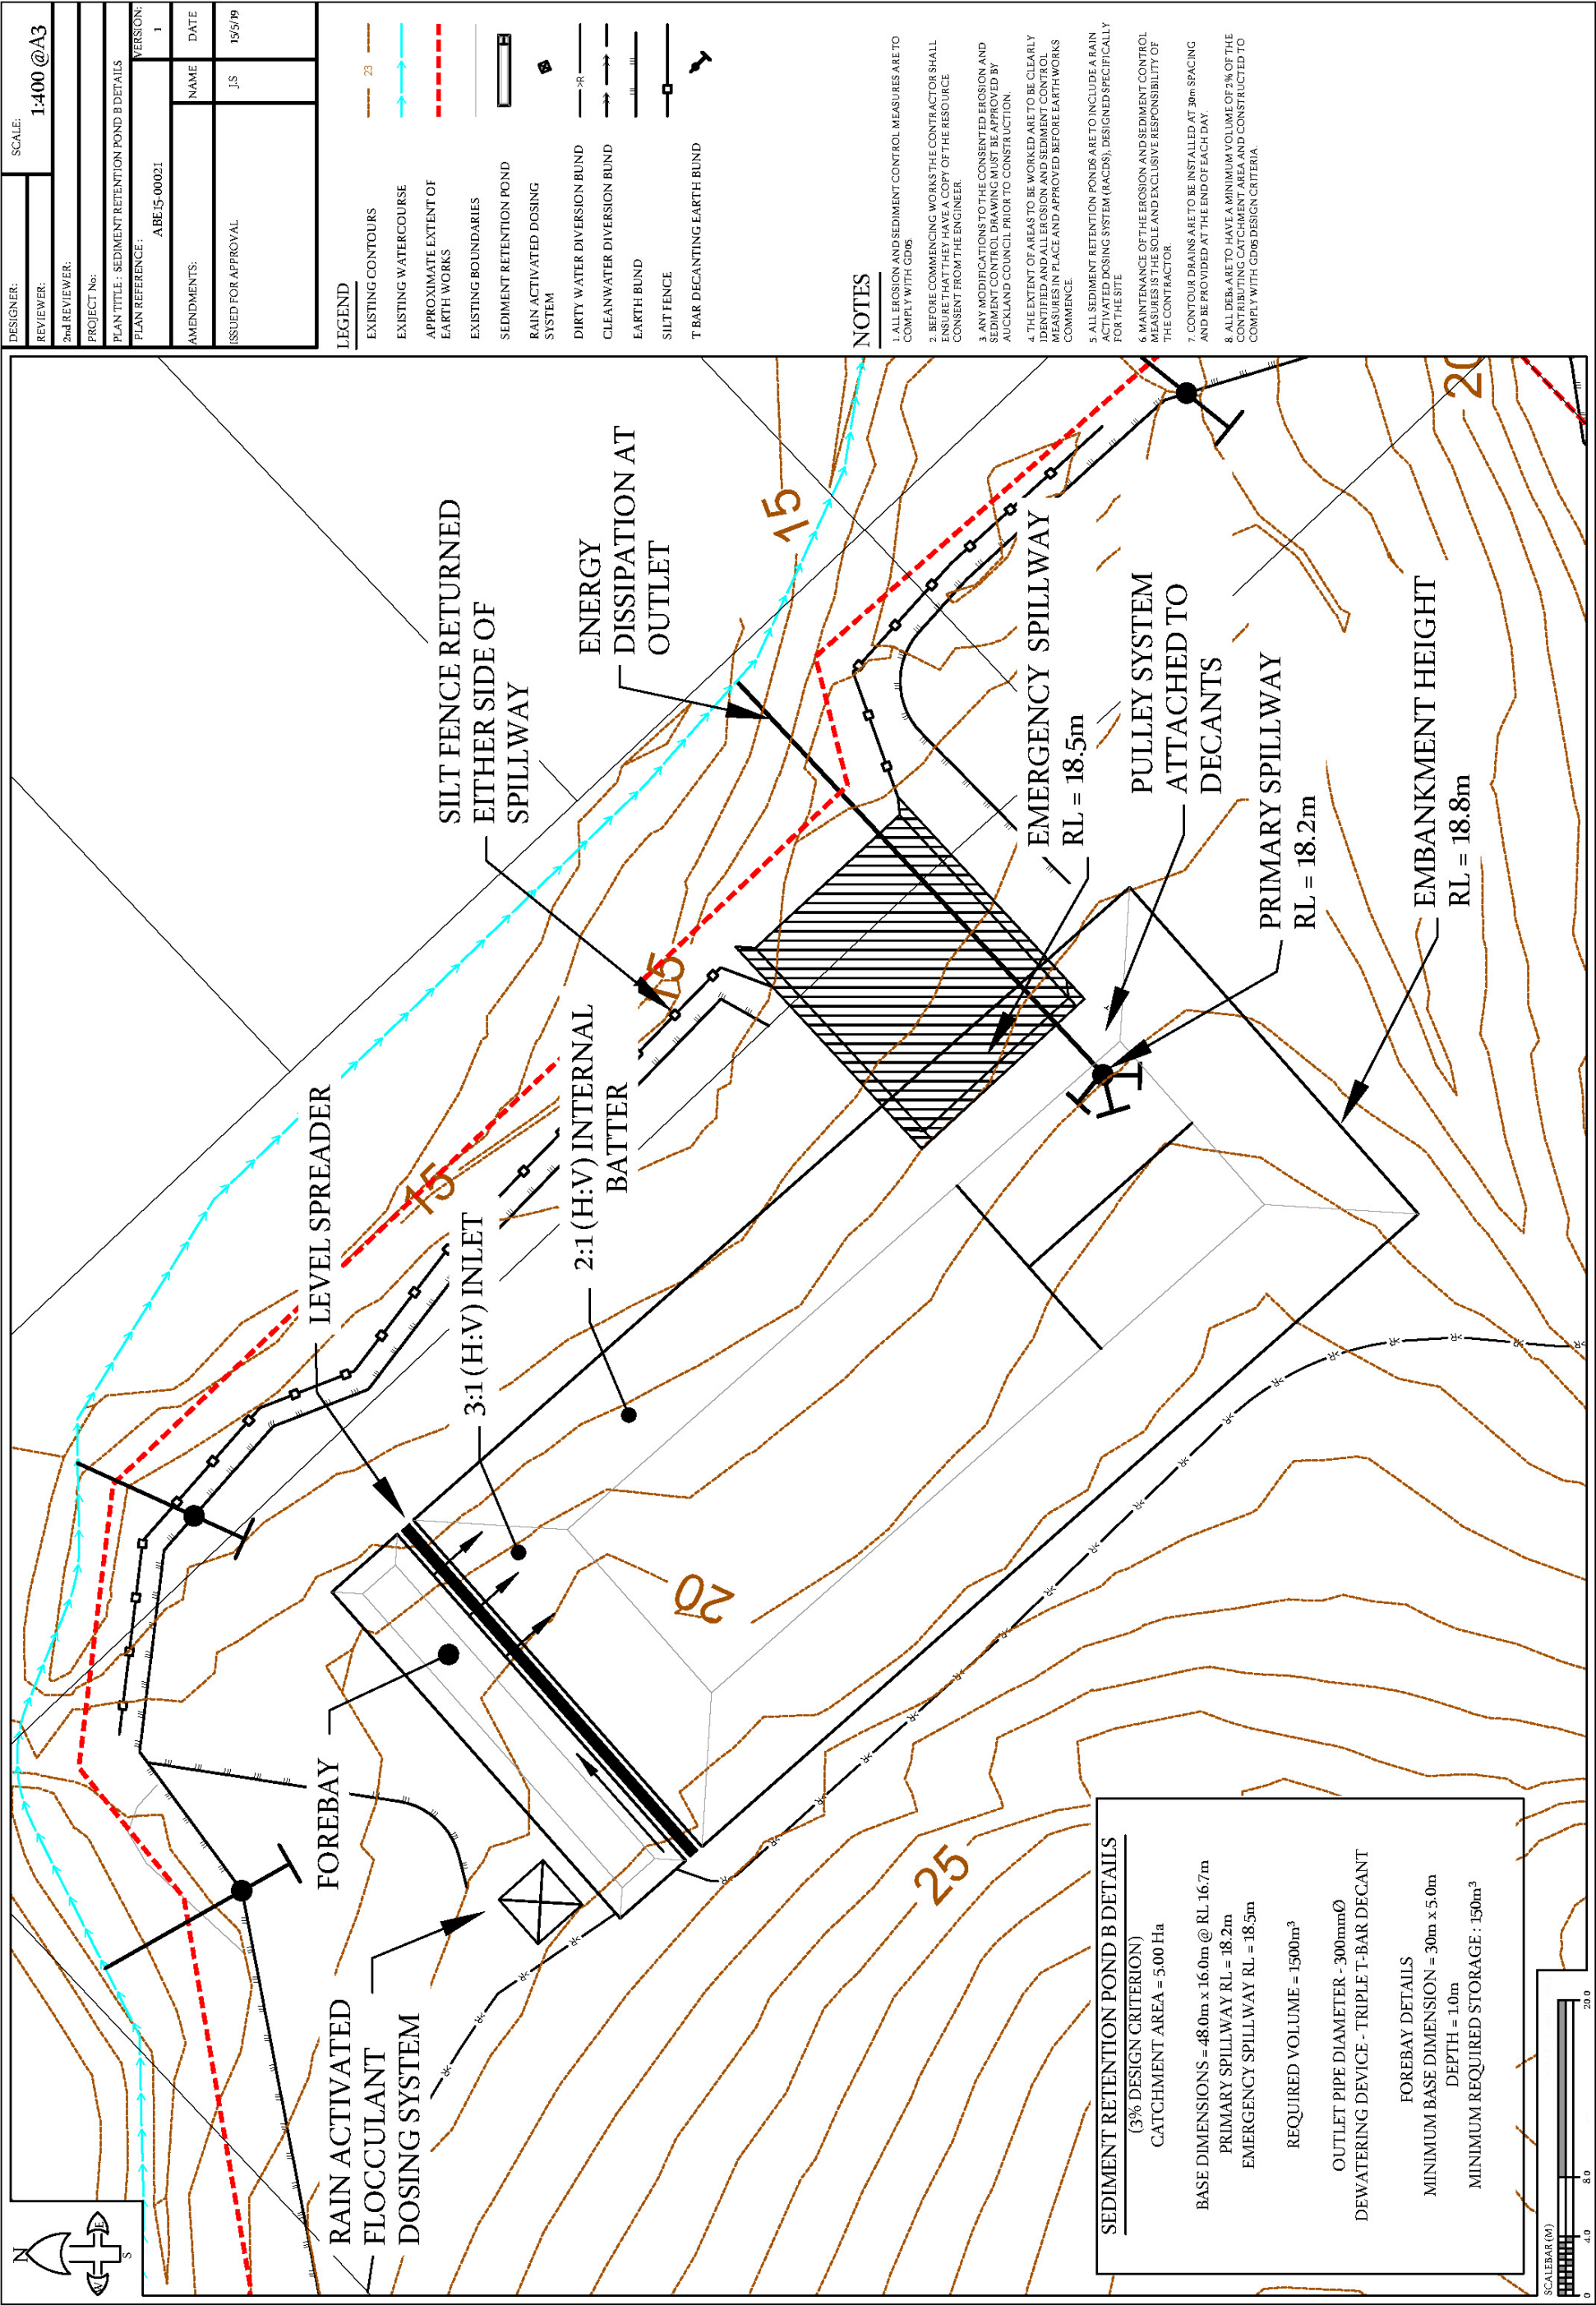

Find out more: phone 09 301 0101
email esc@aucklandcouncil.govt.nz
or visit www.aucklandcouncil.govt.nz

