
NOTES

CONCRETE

■ ALL CONCRETE TO HAVE MINIMUM STRENGTH OF 20MPa.

TYPICAL USES

- TO CREATE A CLEAN EDGE TO MOW UP AGAINST
- UNDER FENCES OR BARRIERS LOCATED WITHIN GRASS
- TO DIRECT WATER INTO CESSPITS IN CARPARK AREAS

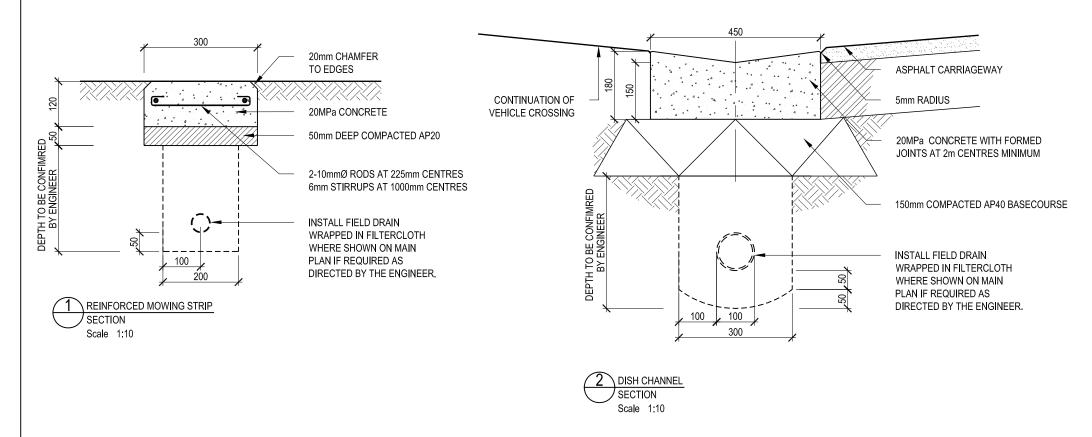



AUCKLAND PARKLAND DESIGN GUIDELINES BUILT ELEMENT DETAILS

INSITU CONCRETE SLIPFORM DISH CHANNEL

DRAWING NUMBER		REVISION
STO_02		1
SHEET 1 OF 1	AS SHOWN @ A4	
CAD FILE 130131_APDG_Bull: Elements_Details_Fences.dvg	9 AUGUST 20	113

On Auckland Council 2013. This best management practice sheet is an information guide only and is not technical or compliance advice. Its recommendations may not be complete or appropriate for all situations, and the person doing/arranging the work remains solely responsible for making their own assessments and doing the work properly, safely and in compliance will all laws and regulations.