



1 TRACK / PATH TRAVERSING DRAINAGE PIPE
SECTION
Scale 1:25

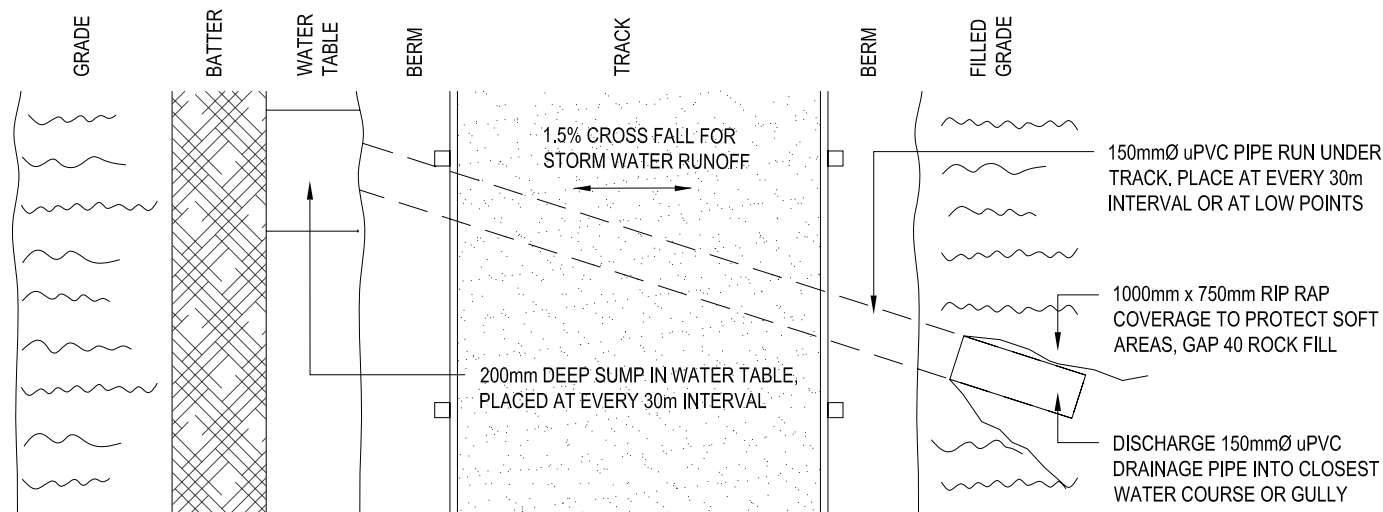

2 TRACK / PATH TRAVERSING DRAINAGE PIPE
PLAN
Scale 1:25

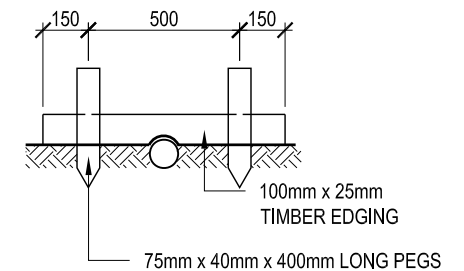

3 TRAMPING TRACK
DETAIL
Scale 1:25

NOTES

GENERAL

- DRAINAGE DISCHARGES AT NO GREATER THAN 20m SPACINGS (USE CLOSER SPACING WHERE TRACK GRADES >1:10) TO NATURAL WATER COURSE OR THROUGH CULVERTS AT APPROPRIATE LOCATIONS.
- PROVIDE 100mm DEEP COMPACTED AGGREGATE (GAP 20 BROWN ROCK, OR SIMILAR AS SPECIFIED BY ENGINEER) SURFACE.
- MAXIMUM BRIDLE TRACK GRADE 1:6.
- CUT SLOPE TO BE MAXIMUM OF 1V:1H UP TO A MAXIMUM OF 500mm. ABOVE 500mm HIGH, SLOPE OF CUT EMBANKMENT TO BE SPECIFIED BY ENGINEER ON SITE.

FIXINGS

- GENERAL STRUCTURAL USE 125mm x 4mm FH NAILS.
- ALL NAILS SHALL BE HOT DIPPED GALVANISED.
- ALL STEELWORK INCLUDING FIXINGS TO BE 316 STAINLESS STEEL WITHIN A COASTAL ENVIRONMENT. FIXINGS TO USE NON FERROUS WASHERS (E.G. NYLON) TO PREVENT ELECTROLYSIS.

TYPICAL USES

- INFORMAL RESERVE WALKWAYS